

Same 60-inch alcove. A very different tub.

TYPICAL STANDARD TUB

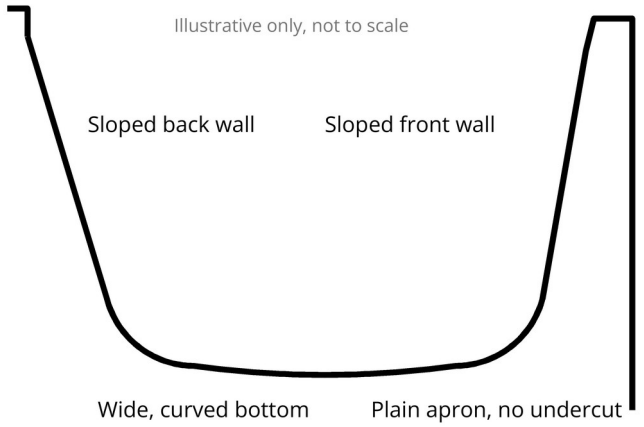

Illustrative schematic by Bofill Technologies.

PERFECTUB®

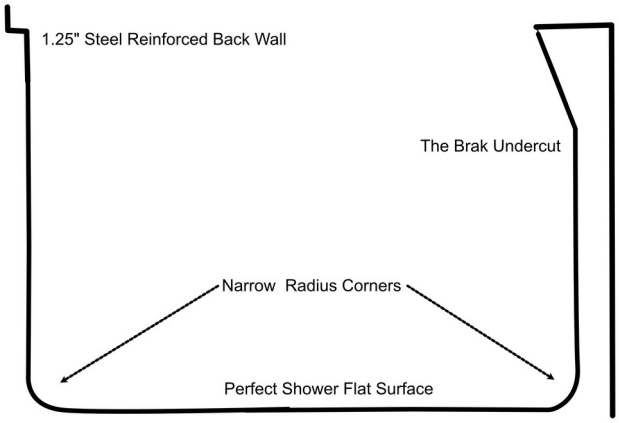

Cross-section drawn by Jerry Gould, Brak Tub.

	Typical standard tub	Perfectub
Walls	Sloped, curved walls	Thin side walls with the patented Brak undercut at the apron
Bottom	Curved	Flat: a “perfect shower flat surface”
Corners	Wide curves	Narrow-radius corners
Back wall	Varies by model	1.25" steel-reinforced back wall; trimback for a tile-to-tub line
Stepping out	Body lean about 17°	Body lean about 5.5°; feet about 3" apart *[PENDING: diagram source]*
Water on the floor	Varies by model	Undercut doubles as a built-in splash guard
Shower chair	Legs rest on a curved floor	Sits flat and level
Bathing space	Baseline	30% more tub volume in the same 60" alcove

~1/3

the sideways force needed to stay balanced when stepping out: 0.096 x body weight in a Perfectub vs. 0.306 x body weight in an ordinary tub (tan 5.5° vs. tan 17°), from Brak Tub's center-of-gravity diagram. *[PENDING: confirm source, e.g. patent figure, before publishing]*

Standard-tub column describes a generic curved, sloped-wall alcove tub; designs vary by manufacturer. Never describe Perfectub's sides as “straight.”