
Perfectub® BKTB-300-RH • 60" x 32" alcove tub

Two inches wider than the original 30" model, with more flat floor space and up to 15" of bathing depth to the linear overflow.

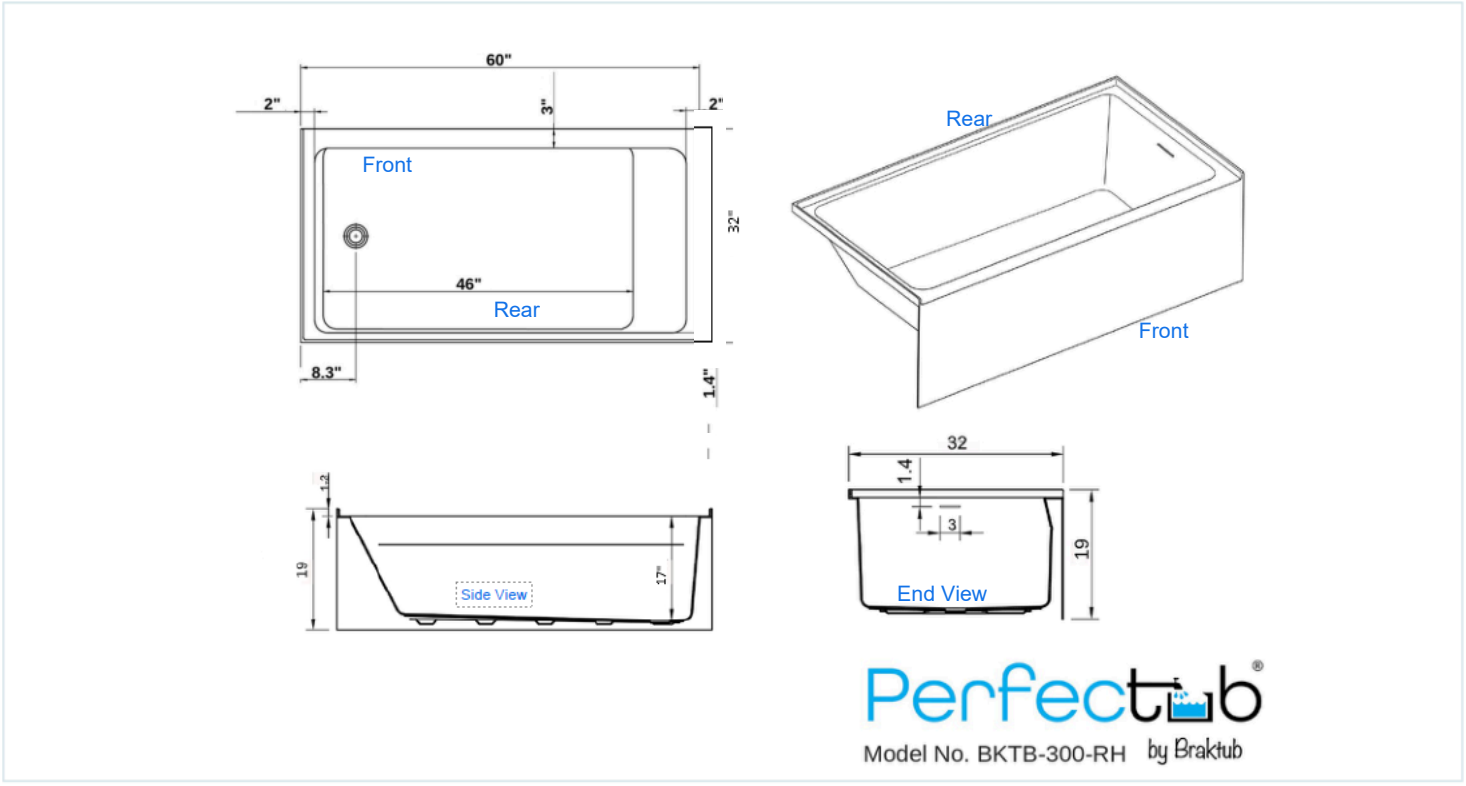

Drawing: Brak Tub file "BKTB-300 32 right specs" (60" x 32", right-hand). Drain on the right when viewed from the front.

Dimensions & ordering

Spec	BKTB-300-RH
Length x width	60" x 32"
Overall height	19"
Interior height (nominal Step In/Out)	17"
Interior length (back slope to drain)	46"
Model No.	BKTB-300-RH
Accessibility	Meets ADA height requirements
Weight / Shipping Wgt.	Tub 105 lbs; Shipping Wgt. 180 lbs

Construction & installation

Item	Detail
Surface	High-gloss acrylic; fiberglass reinforced
Back ledge	1¼", steel-rod reinforced to carry the tile wall; a ¼" shim removes the ledge
Bottom	Flat, solid, reinforced bottom
Waste & overflow	Linear overflow (collector welded in place), 1.5 to 1.25 inch adapter, drain with toe touch pop-up cap: all included.
Subfloor	Self-supporting; smooth subfloor, level both ways. Wet mortar bed or foam bedding recommended on uneven/older floors
Flange	Nail or screw and washer at top edge of flange; screws through the flange void the warranty.
Warranty	Limited lifetime (original residential buyer); 1 yr commercial; accessories 1 yr parts

Brak Tub Corp. • 1019 Fort Salonga Road, Suite 10, Northport, NY 11768 • 516-217-4599 • perfectub.com
Install hotline: 516-217-4599 or 855-321-2725