


Specification of NTC Thermistor for Sensor

PART NO. TSA-104 (J006X145)

CUSTOMER P/N. _____

1. Dimensions

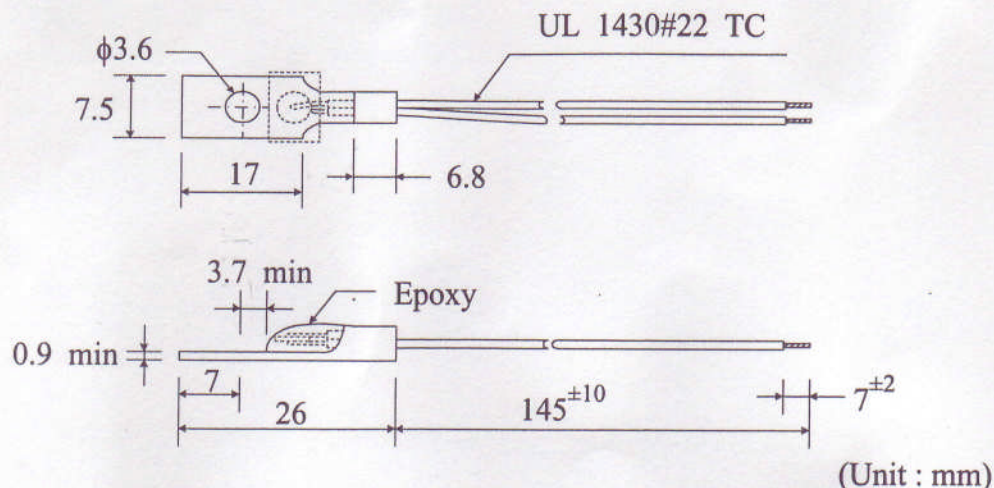

1-1 Material of coating : EPOXY

1-2 Material of Leads : Irradiated PVC Insulated Wire (Color : White)

1-3 Color of coating : Black

2. Electrical characteristics

	Parameter	Symbol	Test Conditions	Min.	Nor.	Max.	Unit.
a.	Resistance At 25°C	R ₂₅	Ta=25°C±0.1°C I<0.5mA	95	100	105	KOHM
b.	Resistance At 50°C	R ₅₀	Ta=50°C±0.1°C I<0.5mA	-----	31.93	-----	KOHM
c.	R ₂₅ / R ₅₀	K	-----	-----	3.131	-----	-----
d.	B Constant	B	(8876 Log K)	4180	4400	4620	K
e.	Thermal Dissipation Constant	C	Ta=25°C±0.1°C	-----	18	-----	mW/°C
f.	Thermal Time Constant	-----	Ta=25°C±0.1°C	-----	18	-----	Sec
g.	Hi-Pot Test	-----	1000V AC 1 min	-----	-----	10	mA

3. Maximun Ratings

	Parameter	Specification	Unit
a.	Operation Temperature Range	-20 --- +125	°C
b.	Max' Permissible Current	20	mA
c.	Max' Operating Current	10	mA


4. Mechanical Characteristics

4-1 Leads Terminal Tensile Strength

Conditions	Test Result	
Fasten body with a Load Applied to each lead 1 kg for 5 sec.	No break out and damage	OK

5. Reliability Test

Item	Test Conditions	Variable
Temp. cycle test	$-20^{\circ}\text{C} \times 30 \rightarrow +25^{\circ}\text{C} \times 5$ $+125^{\circ}\text{C} \times 30 \rightarrow +25^{\circ}\text{C} \times 5$ } X 10	Within $\pm 5\%$
Humidity test	$45^{\circ}\text{C} \ 95\% \text{ RH} \times 1000 \text{ HRS}$	Within $\pm 5\%$
Life test	$20 \text{ mAmp.} \times 1000 \text{ HRS}$	Within $\pm 5\%$

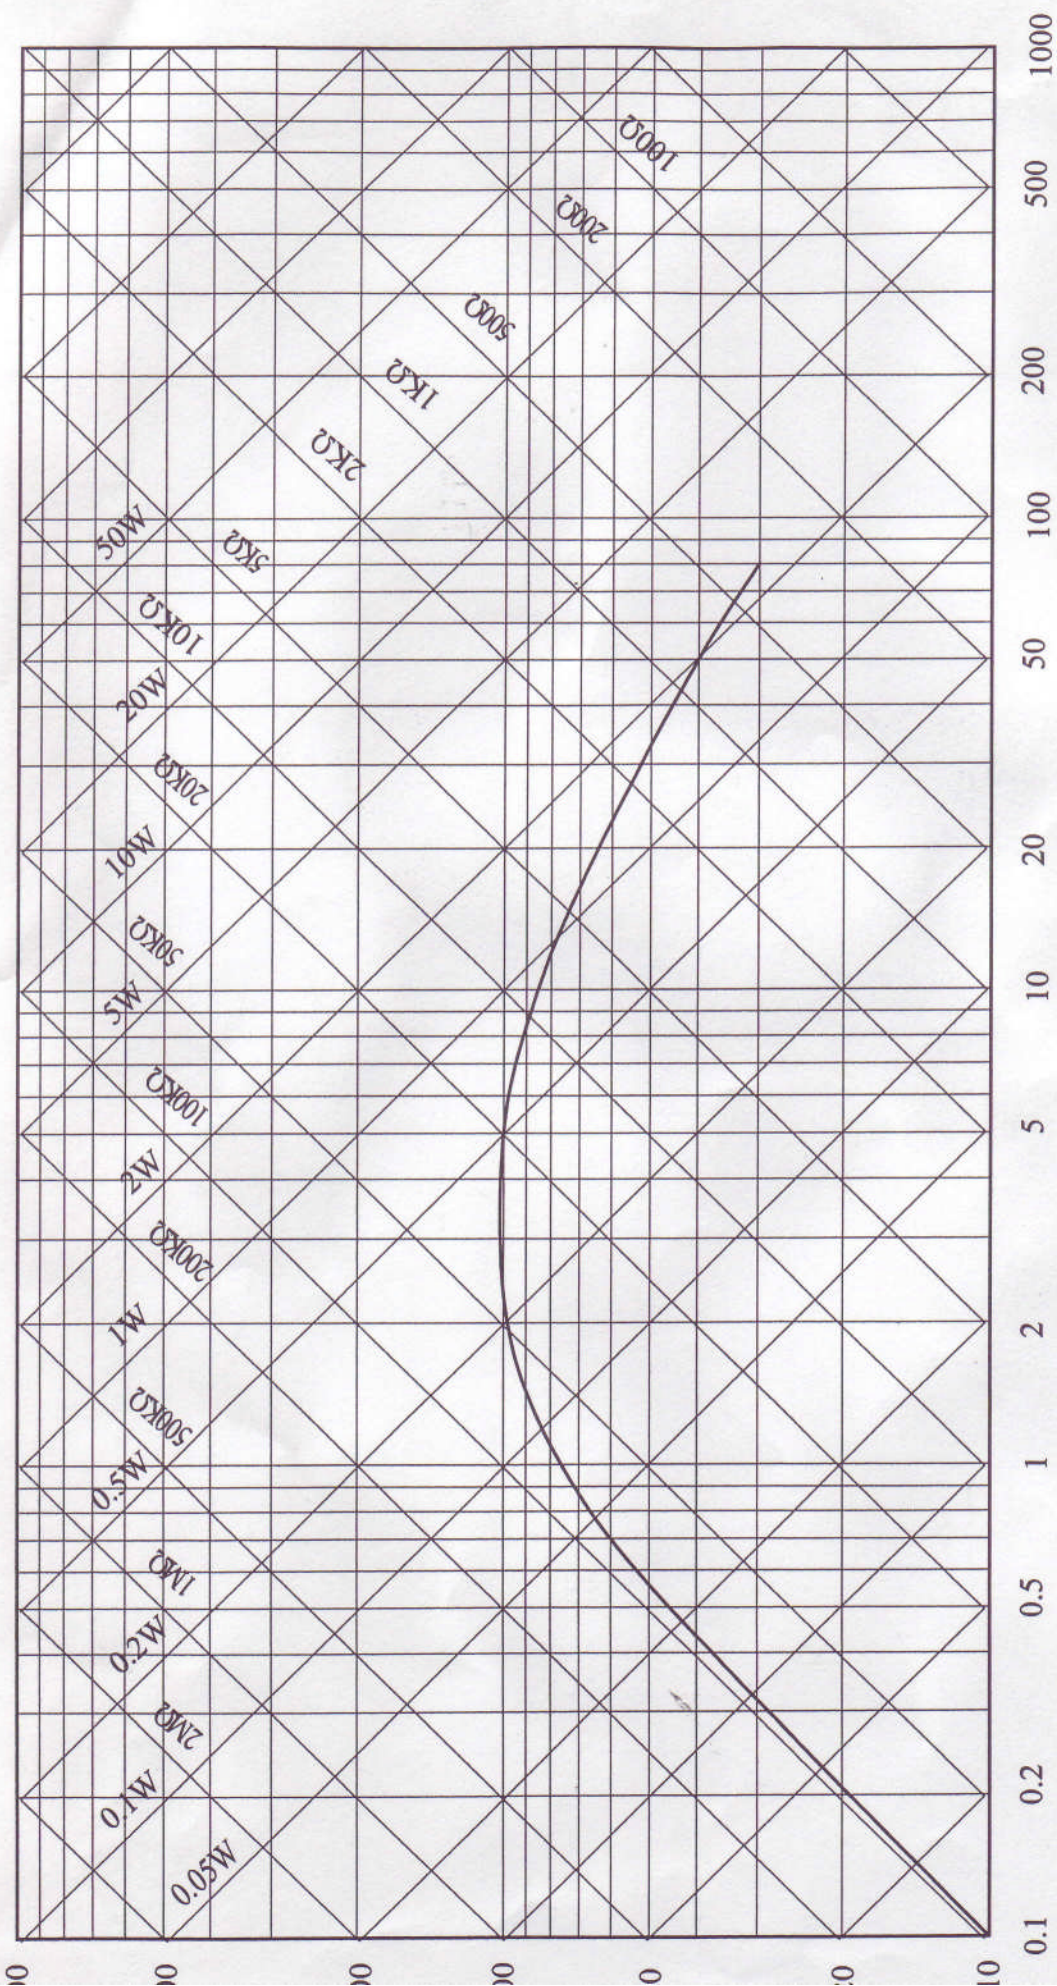

CURRENT (mA)

V-I CHARACTERISTIC CURVE

FOR TSA-104

