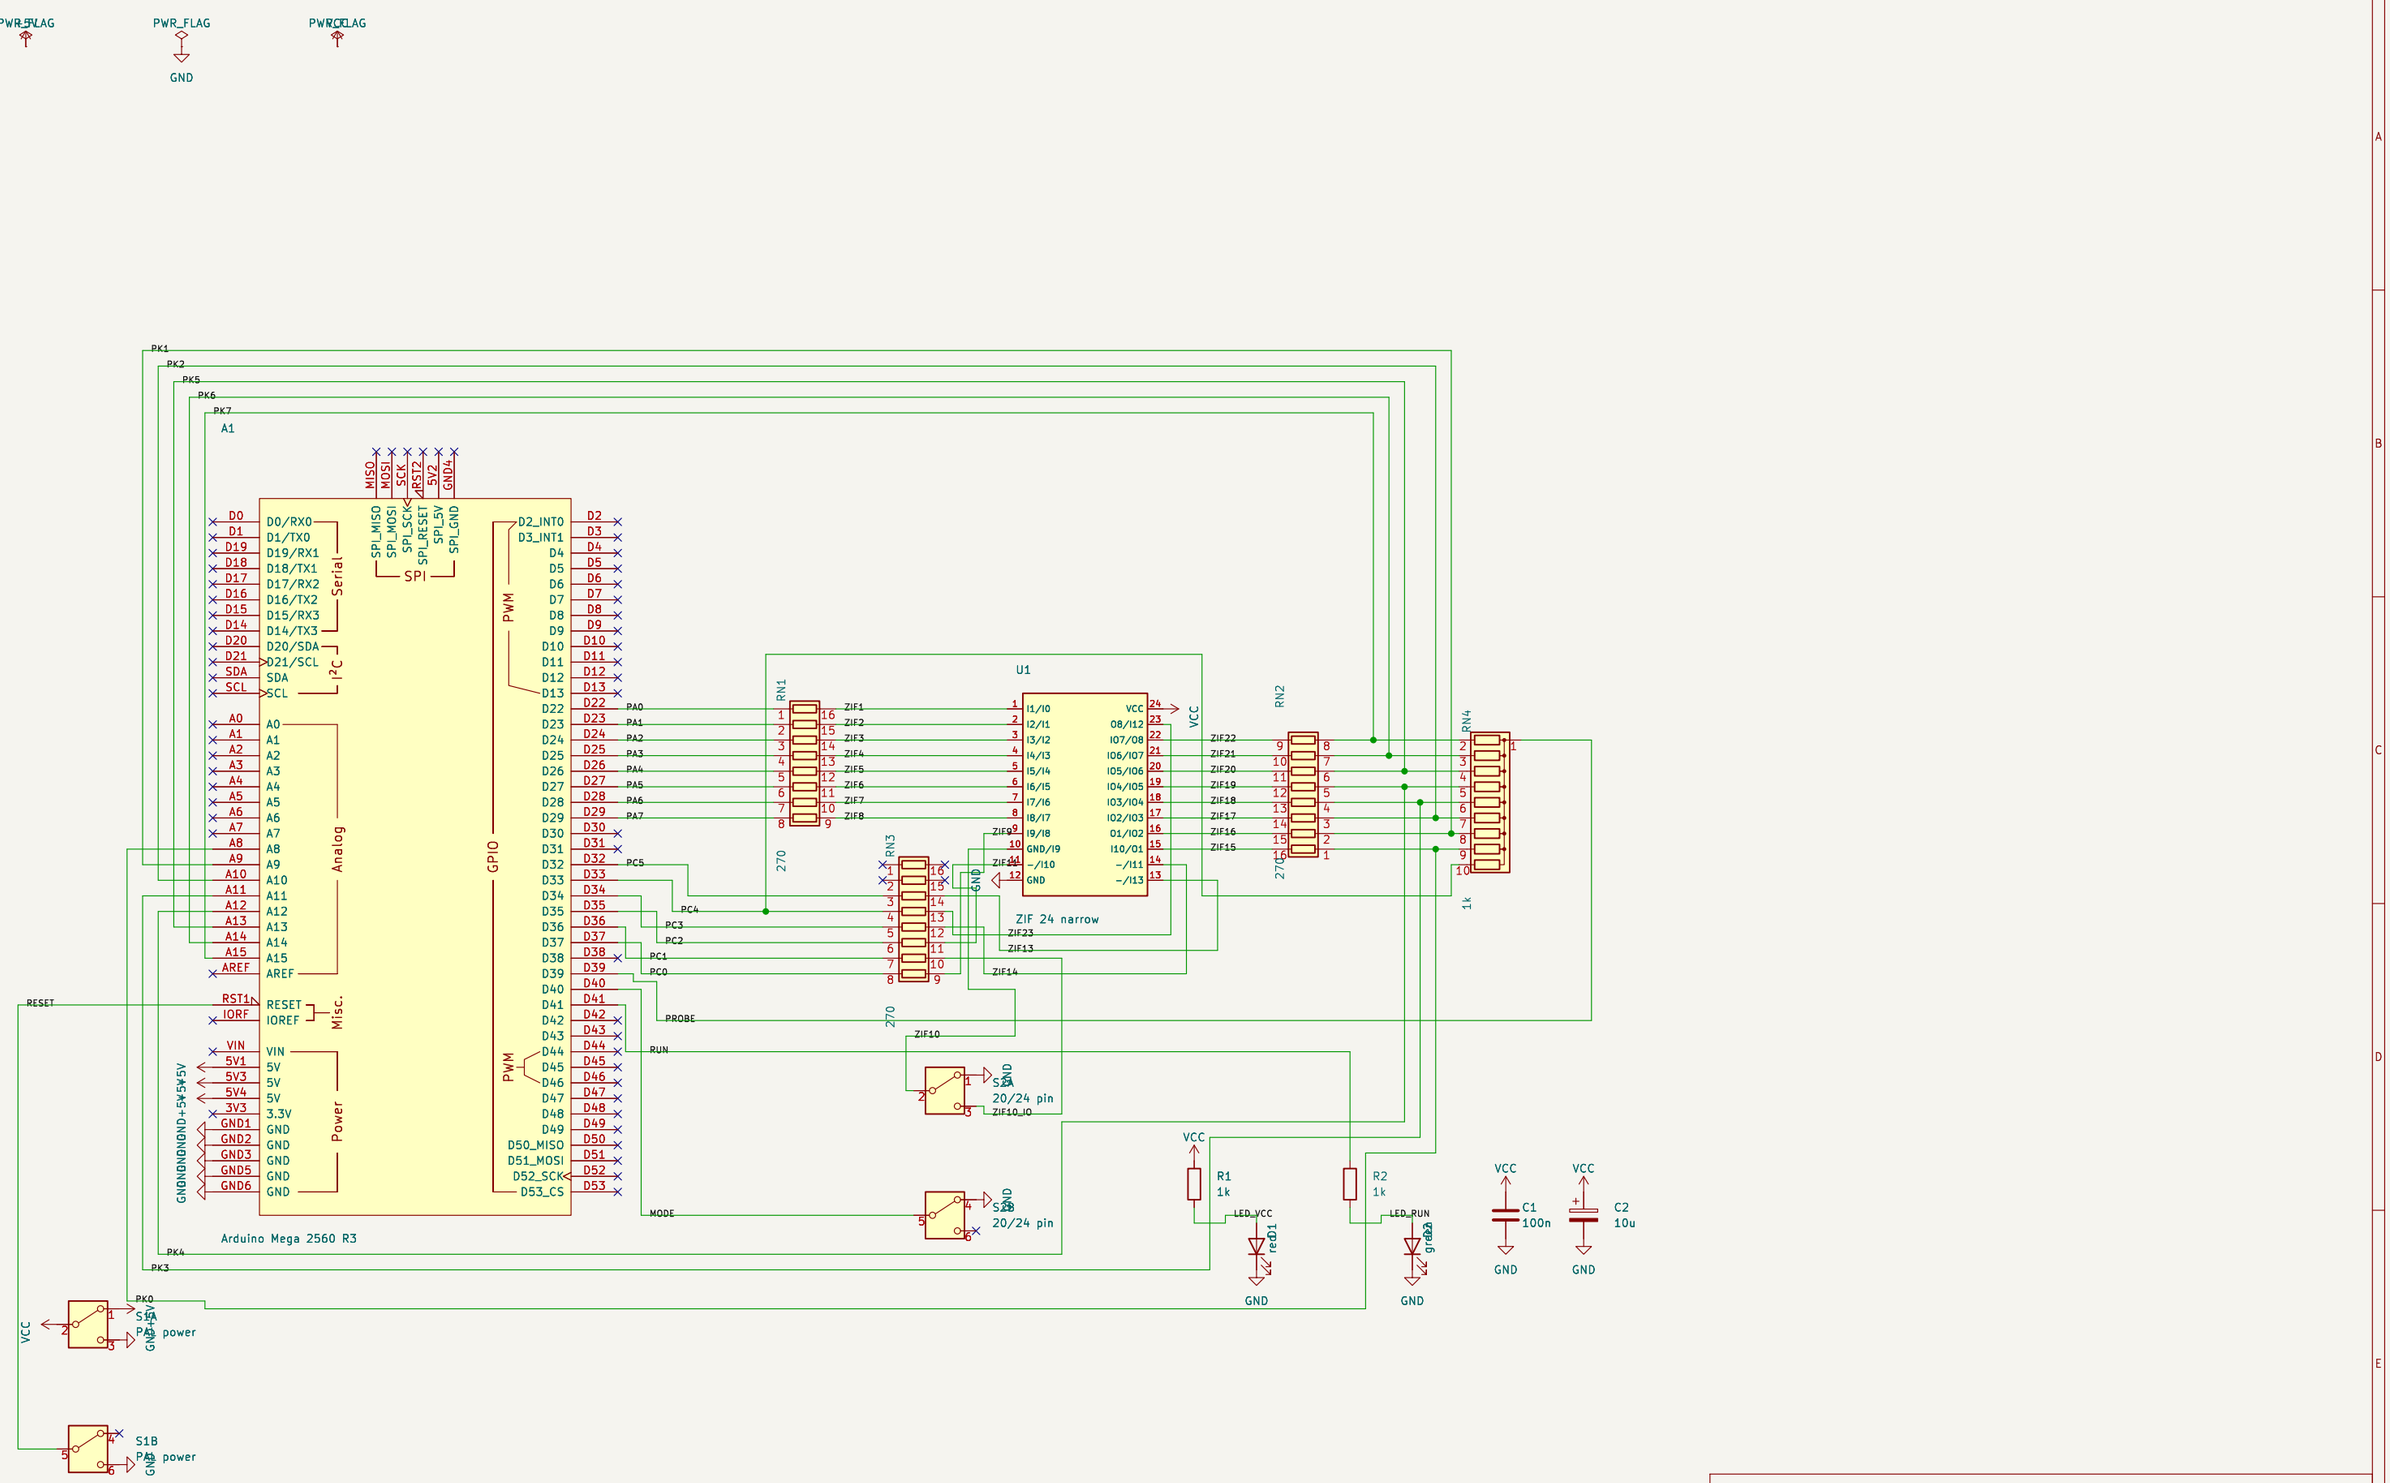


PAL dumper shield (PALDump by Dmitry Shtatnov, github.com/rpocc/PALDump). One 24-pin ZIF socket:
20-pin PALs (PAL10L8, PAL16L8) flush with pin 1, S2 on "20"; 24-pin PALs (PAL20L8) S2 on "24".
S1 off = PAL unpowered and Arduino held in reset; S1 on = dump starts. Every contact has a 270R series resistor,
contacts 15–23 can carry PAL outputs and get a 1k to the probe line (tri-state detection).
github.com/sfambach/PALDump – fambach.net – hardware CERN-OHL-S-2.0

fambach.net

Sheet: /
File: paldump-shield.kicad_sch

Title: PALDump shield for Arduino Mega 2560

Size: A3	Date: 2026-10-28	**Rev: 0.1**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1