



UNICOM
ENERGY STORAGE SYSTEM



Transformer Station

 www.unicom-bess-systems.com

 info@unicom-bess-systems.com

 +381652830062

Transformer Station

The MV Transformer Station of Unicom Energy Storage System is a high-performance, all-in-one containerized step-up transformer station designed to integrate with PowerCombo BESS.

The advanced MV and LV protection, load switches, auxiliary transformers, PDU, UPS systems, intelligent monitoring and control systems are integrated into the transformer station, providing real-time equipment monitoring and efficient grid connection of BESS.

The MV Transformer Station is in protection level of IP54 and corrosion-resistant level of C5M, compliance with international standards. It is ideal for stable and long-lasting operation in harsh environments, especially in extreme weather, coastal areas, and industrial areas in low corrosion conditions.



Easy
Plug and play
ALL-IN-ONE design



Efficient
Lower self-consumption
High efficiency transformer




Intelligent
Real-time detection
Remote monitor of ACB and MV circuit breaker




Reliable
Design for compact and easy O&M Comprehensive tests from components, device to solution

► Schematic Diagram

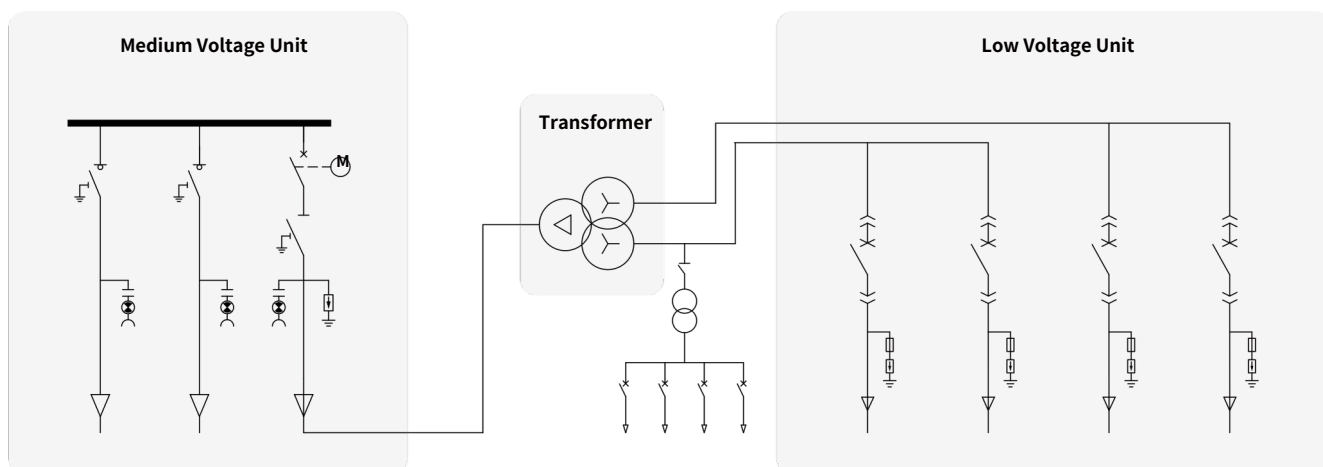

MV Transformer

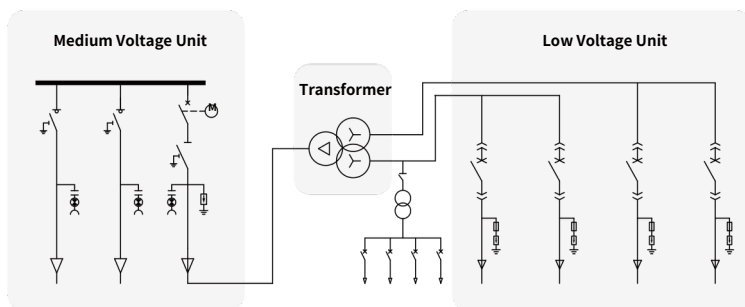

Certificates: IEC 62271-202, EN 50588-1, IEC 60076, IEC 62271-200, IEC 61439-1

Model					CBMV-3300-EU	CBMV-6600-EU
Input	Rated	Input	Voltage	Phase		
number					690V	
AC Power					3Φ	
LV Main Switches					3300kVA@40°C	6600kVA@40°C
Output					ACB (1,600A/3P) × 2	ACB (1,600A/3P) × 4
Rated Output Voltage						
Frequency					10~35kV	
Transformer Tappings					50Hz/60Hz	
Transformer Cooling Type					±2 x 2.5%	
Transformer Oil Type					ONAN	ONAN
Transformer Vector Group					Mineral Oil (PCB Free)	Mineral Oil (PCB Free)
Transformer	Min.	Peak	Efficiency	Dy11	Dy11-y11	
Index					Tier 2 In Accordance with EN 50588-1	
HVC Type					Dry air insulation	
HVC Transformer Protection Unit					MV Vacuum circuit breaker	
Transformer Type					Oil-immersed Transformer	Oil-immersed Transformer
Auxiliary Transformer type					SGL-100kVA 0.69/0.4kV Dyn11	SGL-200kVA 0.69/0.4kV Dyn11
Output	Voltage	of	Auxiliary	400Vac		
Transformer						
Protection					Oil Level, Oil Temperature, Oil Pressure and Gas Relay	
Transformer Detection & Protection					IP 54	
Protection Degree of MV & LV Room					50/51, 50N/51N	
MV Relay Protection					Type I+II	
LV Overvoltage Protection					C5-Medium	
Anti-Corrosion level					1kVA/30min	
UPS					AC690V Iimp≥12.5kA	
SPD						
General						
Dimensions (W*D*H)					6,058mm*2,438mm*2,896mm	6,058mm*2,438mm*2,896mm
Weight					<16t	<25t
Operating Temperature Range					-30°C~40°C	
Relative Humidity					0~95% (Non-condensing)	
Operating Altitude					1,000m	
MV-LV AC Connections					Prewired and Pretested, No Internal Cabling Onsite	
LV & MV Room Cooling					Forced air cooling	
Communication protocols					Modbus TCP/IP	