



Transformer Station

Transformer Station

The MV Transformer Station of UNICOM is a high-performance, all-in-one containerized step-up transformer station designed to integrate with PowerCombo BESS.

The advanced MV and LV protection, load switches, auxiliary transformers, PDU, UPS systems, intelligent monitoring and control systems are integrated into the transformer station, providing real-time equipment monitoring and efficient grid connection of BESS.

The MV Transformer Station is in protection level of IP54 and corrosion-resistant level of C5M, compliance with international standards. It is ideal for stable and long-lasting operation in harsh environments, especially in extreme weather, coastal areas, and industrial areas in low corrosion conditions.



Easy

Plug and play
ALL-IN-ONE design



Efficient

Lower self-consumption
High efficiency transformer



Intelligent


Real-time detection
Remote monitor of ACB and MV circuit breaker




Reliable

Design for compact and easy O&M
Comprehensive tests from components, device to solution

► Schematic Diagram

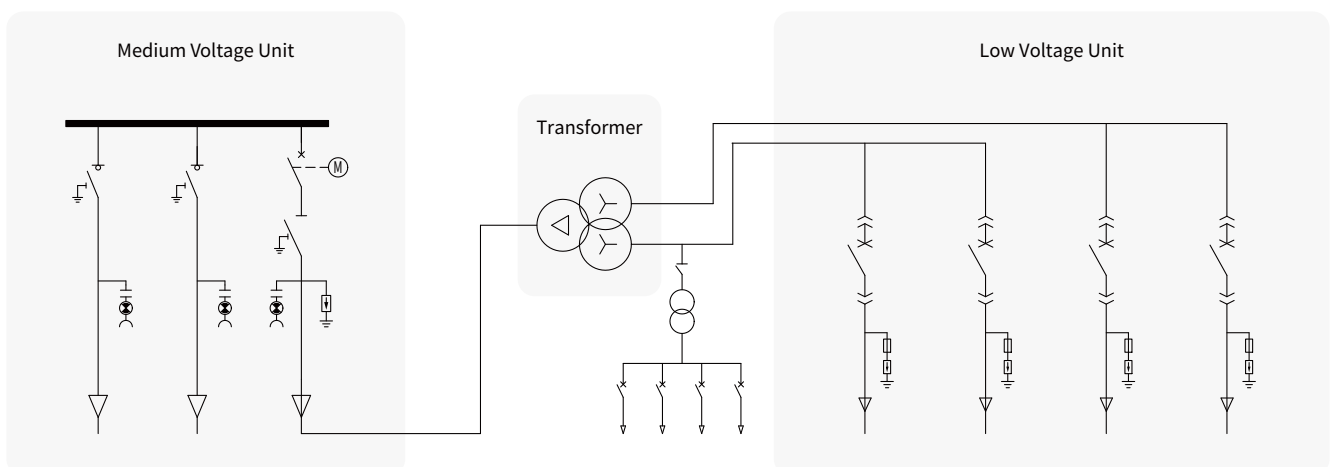

□ MV Transformer

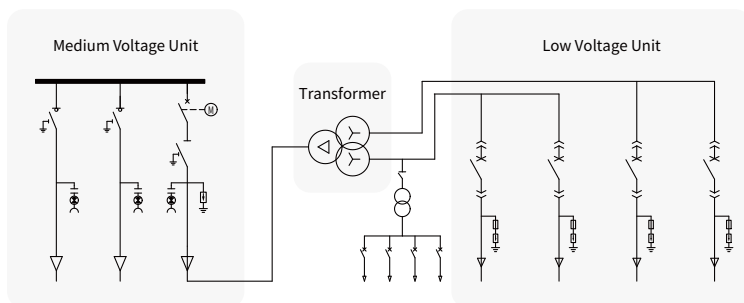

Certificates: IEC 62271-202, EN 50588-1, IEC 60076, IEC 62271-200, IEC 61439-1

Model	CBMV-3300-EU		CBMV-6600-EU	
Input				
Rated Input Voltage	690V			
Phase number	3Φ			
AC Power	3300kVA@40°C		6600kVA@40°C	
LV Main Switches	ACB (1,600A/3P)×2		ACB (1,600A/3P)×4	
Output				
Rated Output Voltage	10~35kV			
Frequency	50Hz/60Hz			
Transformer Tappings	±2 x 2.5%			
Transformer Cooling Type	ONAN		ONAN	
Transformer Oil Type	Mineral Oil (PCB Free)		Mineral Oil (PCB Free)	
Transformer Vector Group	Dy11		Dy11-y11	
Transformer Min. Peak Efficiency Index	Tier 2 In Accordance with EN 50588-1			
HVC Type	Dry air insulation			
HVC Transformer Protection Unit	MV Vacuum circuit breaker			
Transformer Type	Oil-immersed Transformer		Oil-immersed Transformer	
Auxiliary Transformer type	SGL-100kVA 0.69/0.4kV Dyn11		SGL-200kVA 0.69/0.4kV Dyn11	
Output Voltage of Auxiliary Transformer	400Vac			
Protection				
Transformer Detection & Protection	Oil Level, Oil Temperature, Oil Pressure and Gas Relay			
Protection Degree of MV & LV Room	IP 54			
MV Relay Protection	50/51, 50N/51N			
LV Overvoltage Protection	Type I+II			
Anti-Corrosion level	C5-Medium			
UPS	1kVA/30min			
SPD	AC690V Iimp≥12.5kA			
General				
Dimensions (W*D*H)	6,058mm*2,438mm*2,896mm		6,058mm*2,438mm*2,896mm	
Weight	<16t		<25t	
Operating Temperature Range	-30°C~40°C			
Relative Humidity	0~95% (Non-condensing)			
Operating Altitude	1,000m			
MV-LV AC Connections	Prewired and Pretested, No Internal Cabling Onsite			
LV & MV Room Cooling	Forced air cooling			
Communication protocols	Modbus TCP/IP			