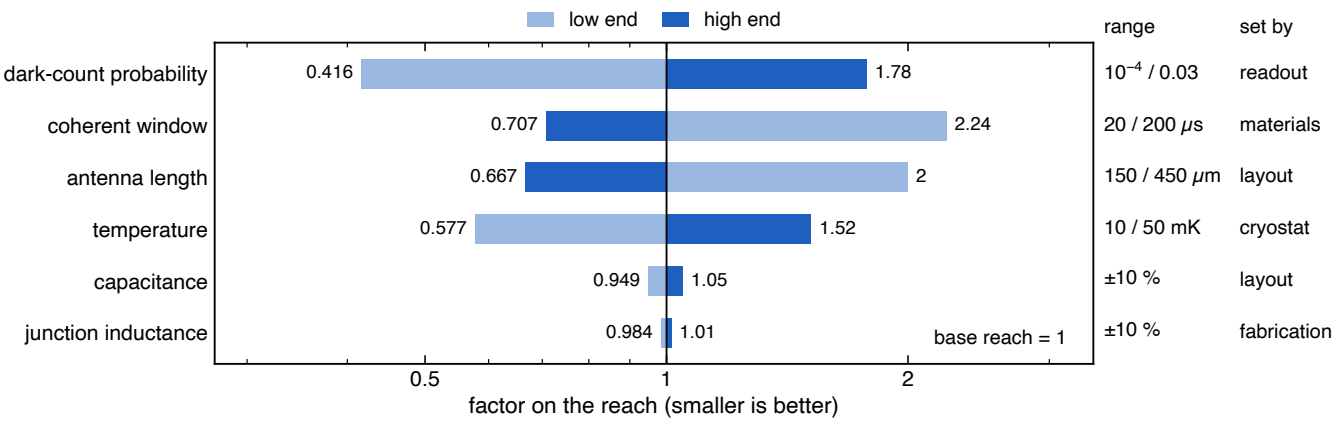
low end
high end
range
set by
dark-count probability
0.416
1.78
10^{-4} / 0.03
readout
coherent window
0.707
2.24
20 / 200 μs
materials
antenna length
0.667
2
150 / 450 μm
layout
temperature
0.577
1.52
10 / 50 mK
cryostat
capacitance
0.949
1.05
±10 %
layout
junction inductance
0.984
1.01
±10 %
fabrication
base reach = 1
0.5
1
2
factor on the reach (smaller is better)