CI YAN®

CROTOR®

Focus on Micromotor Technology

We Drive Your **Innovation** Forward

www.crotormotor.com

WeChat

WhatsAPP

Ningbo Crotor Technology Co., Ltd.

Add: No.1 Menqianhe Rd, Longshan, Cixi, Ningbo, Zhejiang Province, China
Tel/WhatsApp: +86-187 5712 5217
Email: oscar@micromotortech.com

About us

Ningbo Crotor Technology Co., Ltd. was founded in 2022, carrying forward a family micromotor legacy that began in 1994 — when Cixi Longshan Dayan Motor Factory first opened its doors in China's Yangtze River Delta.

Across two generations, we have built deep expertise in precision micromotor design, manufacturing, and application engineering. Today, our 10,000+ sqm production facility operates automated stamping, winding, and assembly lines with an annual output of 8 million units.

Our portfolio spans 6 categories and 60+ series — AC Synchronous, Brush DC, BLDC, DC Gear Motor, Gearbox, and Drone Motor — supported by in-house CAE analysis, custom specification development, and rapid prototyping, delivering complete solutions from first inquiry to mass production.

Focused on Micromotor Technology —
We Drive Your Innovation Forward.



6 Reasons to choose Crotor

- **Family Motor Heritage Since 1994**
Two Generations of Micromotor Expertise, rooted in China's Yangtze River Delta
- **Complete Micromotor Portfolio**
Ac Synchronous·Brush DC·BLDC·DC Gear Motor·Drone Motor·60+ Series
- **Multi-Certified Quality**
VDE:CB:CE:3C·RoHS ·ISO 9001:2015
8 Million Units Annual capacity
- **Trusted Globally**
Serving Clients across North & Latin America, Europe,Asia-Pacific and the Middle East
- **Fast & Flexible Service**
Quick Quotation·Flexible MOQ·Sample Support·Reliable Lead Time
- **International Team & Local Insight**
Management with European Education Back-ground and cross-cultural Expertise for seamless global Communication



VDE


CB


CCC



ISO9001: 2015



RoHS

Focus on
Micromotor Technology
We Drive Your Innovation Forward

Engineering & Customization

Professional Support from Spec to Sample

CAE Analysis & Design 0ptimization

CAE Simulation applied to validate and refine motor design for optimal performance.

• Electromagnetic Field • Structural Strength • Thermal Behavior

Motor Selection & Parameter Matching

Optimal motor identified and tailored to your exact application requirements.

• Voltage • Torque• Speed• Shaft • Connector


Testing & Verification

Full performance testing from development through mass production.

• Electrical Performance & Torque

• Noise & Temperature Rise

• Durability Validation

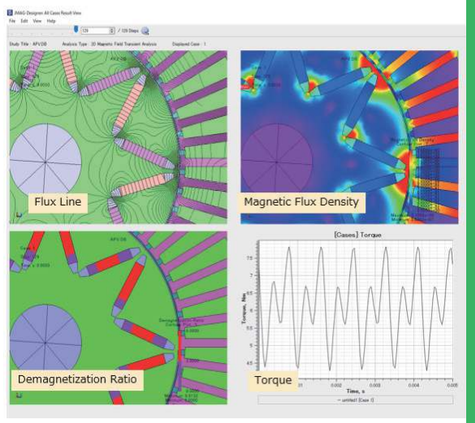

DC Gear Motor Selection Capability — One Size, Four Choices

All units benchmarked @ 24V, ~110 RPM output

	JGB37-555	JGB37-BL3650	PG36-555	PG36-BL3650
Gearbox Type	Spur · Brushed	Spur · Brushless	Planetary · Brushed	Planetary · Brushless
Output Speed	112 RPM	113 RPM	109 RPM	114 RPM
Rated Torque	12.6 kgf·cm	9.0 kgf·cm	4.4 kgf·cm	22.4 kgf·cm
Output Power	14.5 W	10.4 W	4.9 W	26.2 W
Stall Torque	37.7 kgf·cm	28.0 kgf·cm	80.0 kgf·cm	157.3 kgf·cm
Service Life	1,000-3,000 h	10,000+ h	1,000-3,000 h	10,000+ h
Reduction Ratio	57:1	57:1	62:1	56:1
Gearbox Length	25 mm	25 mm	39 mm	39 mm
Recommended For	Cost-Effective Compact Build	Maintenance-Free Cost-Efficient	High Torque Smooth & Precise	Max Torque 24/7 Durable











Production & Quality

Precision Manufacturing. Consistent Performance.

◆ High-Speed Precision Stamping

High-efficiency automated press lines produce precision metal stampings with tight dimensional tolerances —forming the foundation of reliable motor performance.

◆ Fully Automatic Winding & Assembly

Automated winding, soldering, testing, and cover assembly run as a single continuous process, ensuring consistent output quality at high production speed.

◆ Dynamic Balance Verification

Each rotor is individually balance-tested to minimize vibration and extend service life under load.

◆ Automated Assembly Line

High-throughput assembly lines with in-process checkpoints support our 8 million units annual output.

Est. 1994

10,000+ sqm Facility

8,000,000 Units / Year

Focus on
Micromotor Technology
We Drive Your Innovation Forward

Our Product Portfolio


6 Categories · 60+ Series · One Trusted Source



AC Synchronous Motor



Brush DC Motor

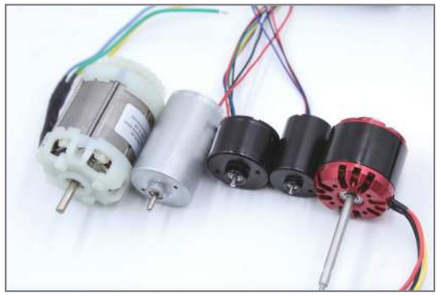

BLDC Motor



DC Gear Motor



Gearbox




Drone Motor

Product Index

Product Category	Models	Page
AC Synchronous Motor	49TYJ / TYJ50 Series	P1–P4
	50/60/68/70/80KTYZ Series	P5–P7
	43TYD / 49T500	P8
Brush DC Motor	N20/N30 · FF030/050	P9
	RF300/370 · RF500/520	P10
	RS380/385/395 · RS540/550/555	P11
	RS755/775 · RS887/997	P12
	31ZY · 42ZY	P13
	5512 · 7512/9912	P14
BLDC Motor	BL24 Series· BL36 Series	P15
	BL38/48 · BL42 Series	P16
	BL3525 · BL4250 Outrunner	P17
DC Spur Gear Motor	GA12-N20/N30 · GA25-370/385	P18
	JGB37-520/3530 · JGB37-545/555	P19
	GA25-BL2430 · JGB37-BL3650	P20
DC Planetary Gear Motor	PG22-130/180 · PG24-370/385	P21
	PG28-385/395 · PG36-545/555	P22
	PG42-775/795 · PG36-BL3650	P23
DC Worm Gear Motor	1218-N20/N30 · JGY4632-370/385	P24
	JGY5840-555 · JGY5840-31ZY	P25
	JGY5882-775 · JGY5882-BL4260	P26
Gearbox	Y40 · PG36/42	P27
Drone Motor	1404 · 2212	P28
	2306 · 2807	P29
	3115/3120 · 4214	P30


AC Synchronous Motor




49TYJ-B Bivolt

Dual-Voltage Motor Designed Specifically for the Brazilian Market

Brazilian Churrasco Rotisserie / Electric BBQ Skewer Drive

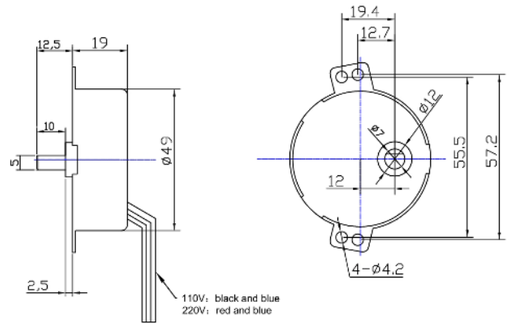




49TYJ-C-AC/DC

Ultra-Quiet and Low-Voltage DC Synchronous Motor


Automotive In-Cabin Devices / DC-Powered Smart Accessories

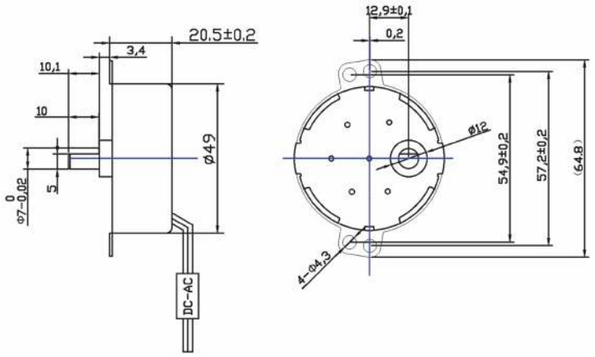



49TYJ-D/E

Stable Rotation Direction & Powerful Torque Output

Industrial Sewing Machines/Valve Actuators/Oven Rack Drives



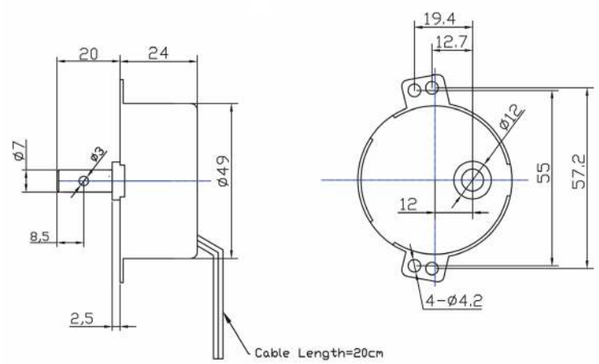


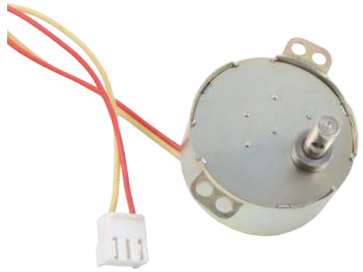

49TYJ-H

Thick-Frame All-Metal Synchronous Motor for Heavy Continuous Duty

Commercial Rotisserie Ovens/Cooling fans

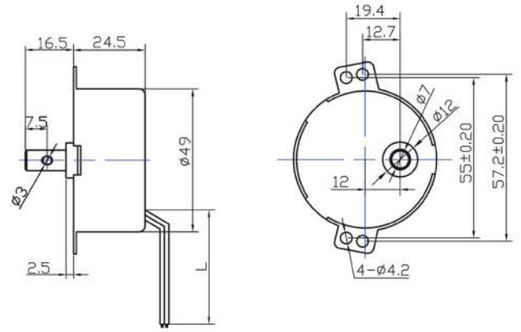




TYJ50-B

Thinnest Turntable Motor for Space-Critical Appliance Designs

Microwave Oven Turntables/Compact Rotating Display Stands

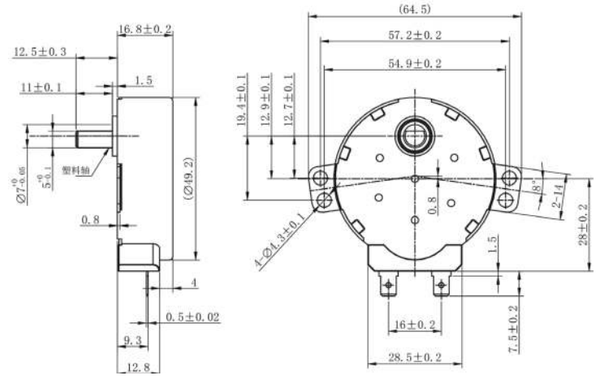


TYJ50-C

Higher-Torque Turntable Motor for Demanding OEM Applications

Smart Home Devices / Electric Heater Rotation Mechanisms



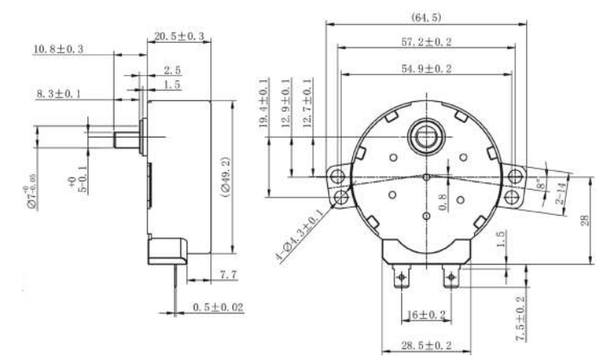

| Category | AC Synchronous Motor | | |

| AC Synchronous Motor | | |


AC Synchronous Motor




50KTYZ

Compact Low-Power Motor for Light-Duty Continuous Rotation

Electric Timers & Clocks / Christmas Craft Rotating Displays

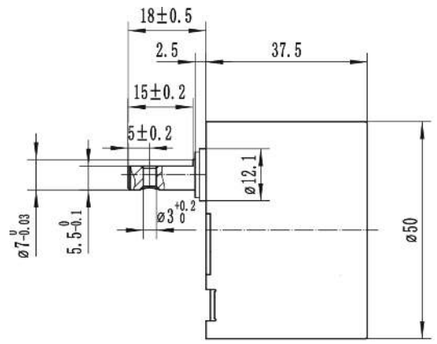

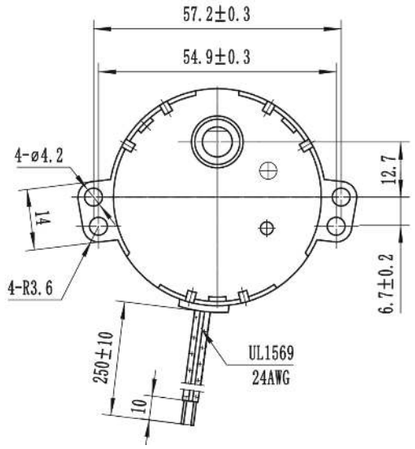





60/68KTYZ

Mid-Frame Synchronous Motor for Global Appliance OEM Platforms

Electric Ovens/Electric BBQ Grill Drives

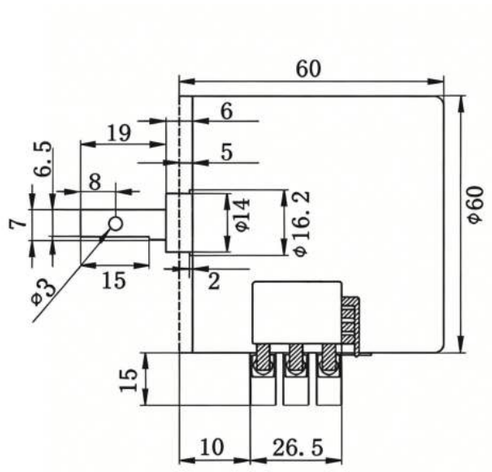

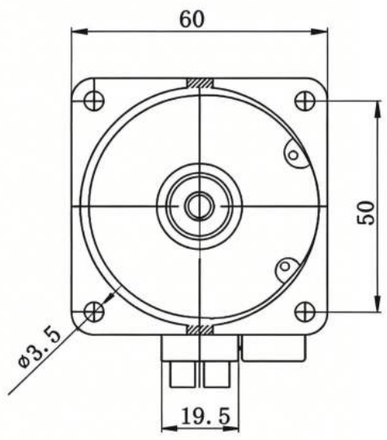





49T500

High-Speed 500 RPM Unidirectional Synchronous Motor — Fixed CW or CCW

Mechanical timers & cam programmers
Medical & laboratory dosing equipment
Automated dispensing / vending systems

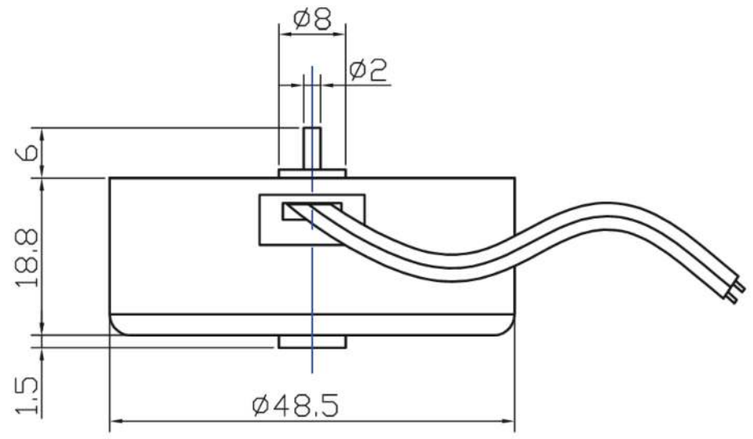




43TYD

High-Speed 500 RPM Reversible Synchronous Motor — Bidirectional CW / CCW Control

Automatic valve & damper actuators (open/close cycles)
Dispensing & dosing pumps with reverse function
Industrial timers & program control units

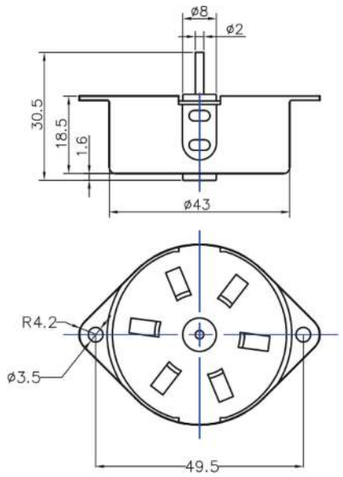


Brush DC Motor

N20/30




Pint-Sized Precision Motor for Miniature Mechanisms
Smart Lock / Medical Device / RC Toy

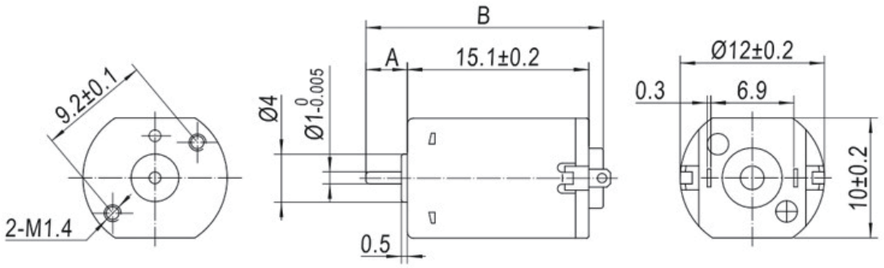

FF030/050




Featherweight Motor Built for Handheld Personal Care
Electric Toothbrush / Hair Clipper / Facial Massager

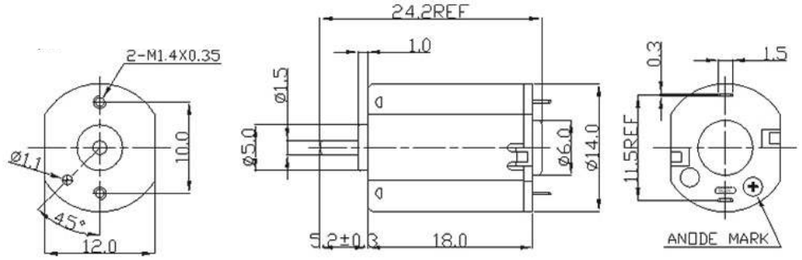

RF-300/370




Quiet & Efficient Motor for Everyday Home Appliances
Air Purifier / Water Pump / Office Equipment

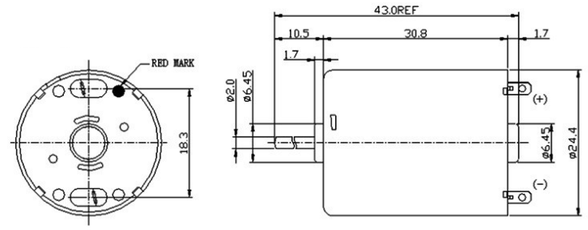

RF-500/520

High-Speed Mid-Power Motor for Personal Care & Portable Devices
Shaver / Handheld Fan / Portable Blender



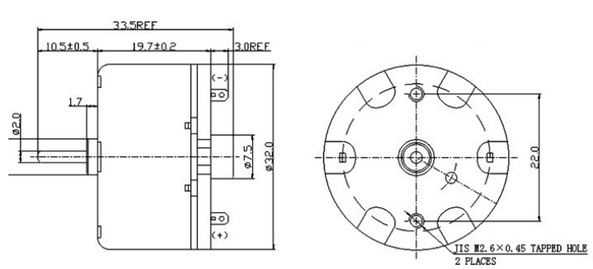

Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
N20	3.0-12.0	12	16100	0.015	12240	0.06	0.003	0.37	0.012	0.21
	2.0-5.0	5	14600	0.03	11800	0.11	0.0026	0.31	0.013	0.47
N30	1.4-6.0	2.5	5300	0.015	4220	0.059	0.0016	0.07	0.008	0.23
FF-030	3.5-6.0	5	11700	0.05	9230	0.19	0.005	0.48	0.024	0.7
	2.0-4.0	3	11000	0.045	8942	0.196	0.00327	0.3	0.0075	0.85
FF-050	2.0-6.0	4	4900	0.048	3645	0.14	0.0066	0.26	0.0258	0.4
	4.0-7.0	6	7520	0.032	5946	0.121	0.0071	0.39	0.034	0.456
	6.0-8.0	7	14300	0.07	11440	0.28	0.01	1.173	0.05	1.13

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
RF-300	2.0-4.0	3	3850	0.023	3080	0.088	0.0042	0.13	0.021	0.35
	3.0-6.0	4.5	2500	0.01	1875	0.027	0.0029	0.06	0.0114	0.08
RF-370	4.0-7.0	6	7300	0.055	6280	0.36	0.0216	1.39	0.154	2.24
	9.0-13.0	12	5600	0.022	4870	0.15	0.0205	1.026	0.158	1
RF-500	4.0-7.0	6	2700	0.015	2214	0.072	0.011	0.25	0.0612	0.33
	6.0-12.0	9	4500	0.026	3706	0.121	0.0227	0.67	0.1286	0.57
RF-520	2.0-4.0	3	1750	0.022	1424	0.096	0.0127	0.19	0.068	0.42

Brush DC Motor

RS-380/385/395

Industry-Standard Motor for Power Tools & Automotive Systems
Cordless Drill / Power Window / RC Vehicle




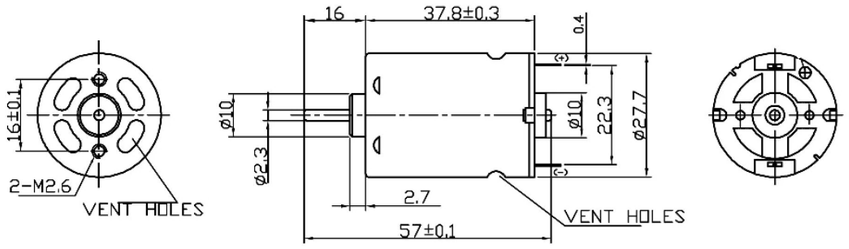

RS-540/550/555

High-Speed Workhorse for Mid-Range Power Equipment
Hedge Trimmer / Vacuum Cleaner / Garden Tool



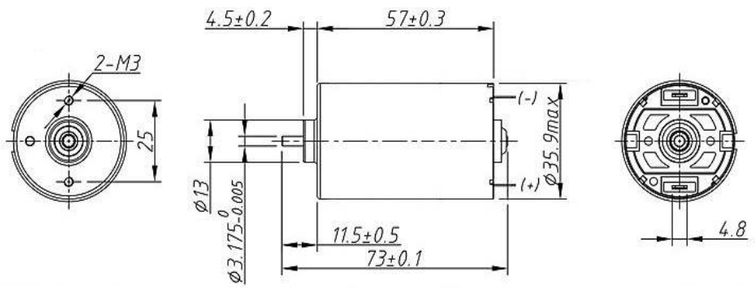


Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
RS-380	9.0-13.0	12	7600	0.1	6468	0.57	0.072	4.75	0.483	3.27
	20.0-25.0	24	7400	0.06	6000	0.27	0.064	3.90	0.338	1.2
RS-395	9.0-13.0	12	3600	0.05	2940	0.25	0.063	1.90	0.322	1.04
	9.0-13.0	12	7500	0.15	6126	0.68	0.085	5.34	0.464	3.05
RS-540	9.0-13.0	12	5800	0.35	4800	1.24	0.195	9.9	1.3	7.2
RS-550	9.0-13.0	12	3600	0.2	3010	0.68	0.18	5.6	1.1	3.4
	4.0-7.0	6	5500	0.7	4300	2.72	0.25	11.3	1.333	12.5
RS-555	20.0-25.0	24	3900	0.12	3144	0.5	0.2403	7.72	1.24	2.08

RS-755/775

Heavy-Frame Motor for High-Torque Industrial Drives
Winch / Snow Blower / Electric Bike




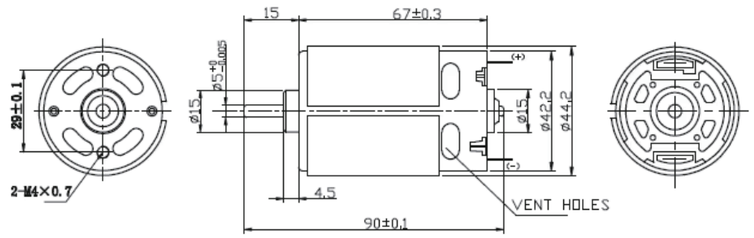

RS-887/997

Extra-Large High-Voltage DC Motor for Professional-Grade Power Tools
Electric Drill / Power Saw / Commercial Lawn Mower



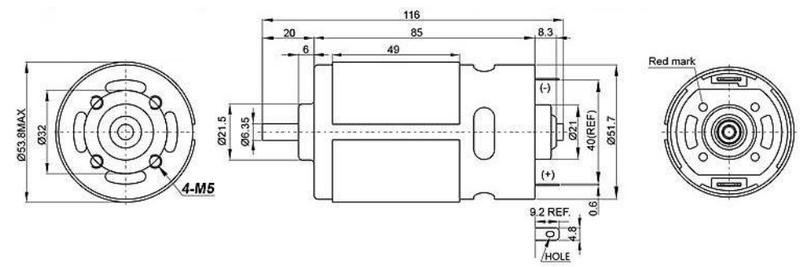

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
RS-755	6-24	12	3,700	0.48	2,800	3.45	0.69	19.80	2.88	18
	9-36	24	5,000	0.3	4,000	1.5	0.48	19.70	2.91	35
RS-775	9-36	12	4,600	0.6	3,500	4.3	0.86	30.90	3.6	30
	9-36	24	6,280	0.37	5,010	1.87	0.6	30.8	3.64	59
RS-887	10-36	18	9,500	0.85	8,000	3.31	0.35	28.7	0.47	21
	20-48	36	19,000	1.5	16,000	9.5	0.47	77.2	0.93	42
RS-997	6-48	24	4,900	0.42	4,200	2.8	1.17	50.4	12	26
	6-48	12	4,900	5.4	4,200	5.4	1.1	47.4	11	55

Brush DC Motor



31ZY


Permanent Magnet Motor for Reliable Light-Duty Automation
Packaging Machine / Conveyor / Printing Equipment

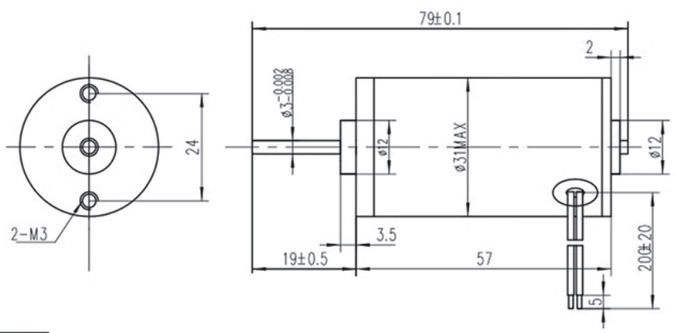

42ZY

Mid-Frame PM Motor for Continuous Industrial Operation
Textile Machine / Labeling Equipment / CNC Feeder



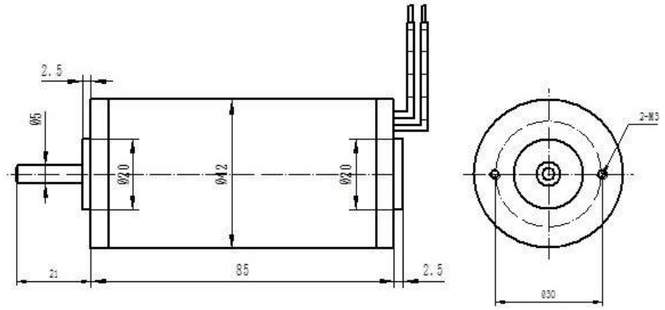


Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
31ZY	6.0-15.0	12	4,000	0.11	3,200	0.5	0.1	3.30	0.61	2.3
	12.0-30.0	24	5,000	0.1	4,000	0.6	0.2	8.20	0.87	2
	12.0-30.0	24	8,000	0.2	6,600	1	0.2	13.50	1.22	4.4
42ZY	12.0-30.0	24	3,000	0.2	2,400	1.2	0.71	15	2.86	3.7
	12.0-30.0	24	3,600	0.3	2,850	1.5	0.82	23	2.96	4.7



5512


High-Voltage DC Motor Built for High-Speed Kitchen Appliances
Coffee Grinder / Hand Blender / Hair Dryer

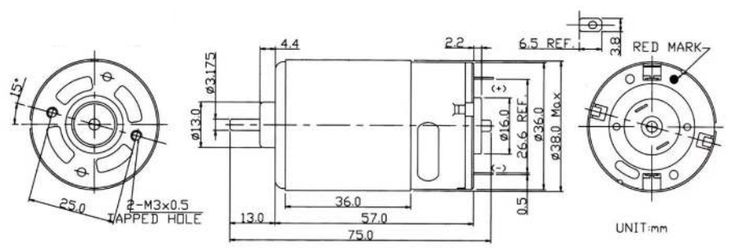

7512/9912

High-Power HVDC Motor for Heavy-Duty Food Processing Equipment
Meat Grinder / Stand Mixer / Commercial Blender



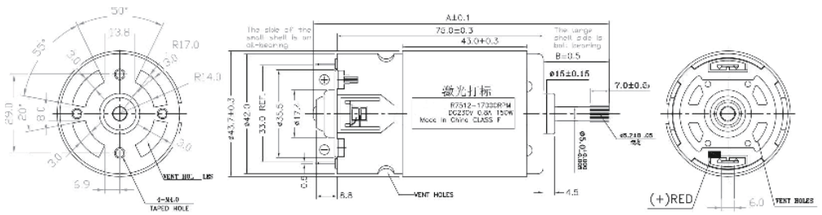

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
5512	200-240	230	16,800	0.04	14,744	0.28	0.31	46.30	2.5	2.3
7512	200-240	230	17,420	0.29	14,054	1.19	1.1	158.30	5.68	4.97
9912	200-240	230	8,239	0.1	7,900	0.9	0.8	64.90	14.5	9

BLDC Motor



BL24 Series (2418/2430)


Compact Brushless Motor for Smart Home & Robotics
Robot Joint / Smart Appliance / AGV

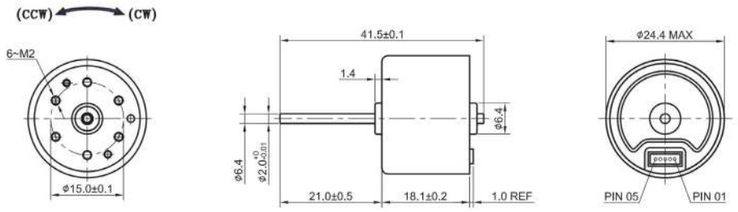

BL36 Series (3630/3650)

Mid-Power Brushless Motor for Long-Life Automation Drives
E-Bike / Medical Bed / Conveyor Drive



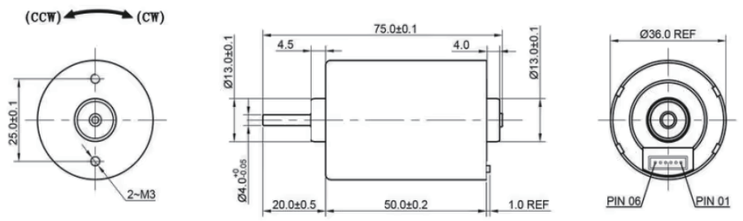


Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
BL2418	8-18	12	6,200	0.06	5,100	0.18	0.02	1.05	0.11	0.7
	12-30	24	8,700	0.05	7,500	0.13	0.02	1.54	0.145	0.7
BL2430	9-16	12	7,400	0.13	5,800	0.44	0.053	3.16	0.256	1.9
	12-30	24	9,700	0.1	7,700	0.4	0.068	5.38	0.324	1.54
BL3630	8-16	12	5,817	0.249	4,882	0.638	0.138	6.51	0.657	3.46
	8-26	24	8,872	0.184	7,364	0.872	0.191	14.45	1.126	4.23
BL3650	8-26	18	6,693	0.3	5,555	1.552	0.306	17.43	1.8	7.54
	8-26	24	8,458	0.4	6,851	1.794	0.395	27.77	2.08	7.63

BL38/48

High-Efficiency Brushless Motor for Power Tools & Garden Equipment
Cordless Drill / Electric Saw / Garden Trimmer




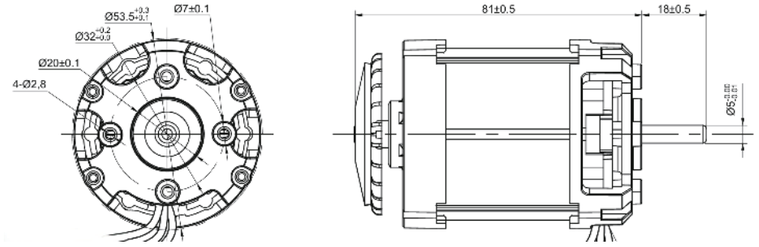

BL42 Series (4260/4285)


High-Torque BLDC for Heavy-Duty Automation & Pump Drives
AGV / High-Pressure Pump / Automated Guided Vehicle



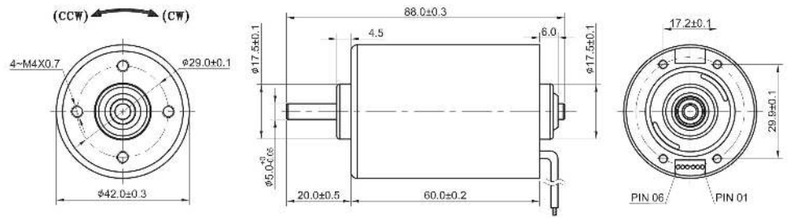


Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
BL38	8-18	12	14,000	3.76	14,000	28	1.786	258.00	14.3	7.5
BL48	8-36	24	5,239	0.86	4,662	4.65	1.927	92.30	14.42	30.09
BL4260	8-26	18	3,690	0.2	3,284	1.564	0.655	22.05	5.952	12.6
BL4260	8-26	24	4,280	0.2	3,766	1.567	0.767	29.62	6.388	11.59
BL4285	8-26	24	4,280	0.22	3,766	2.22	1.086	41.98	9.051	16.42



BL3525


Compact Outrunner Motor for Versatile Low-Voltage Applications
Smart Home Device / Beauty Instrument / Camera Module

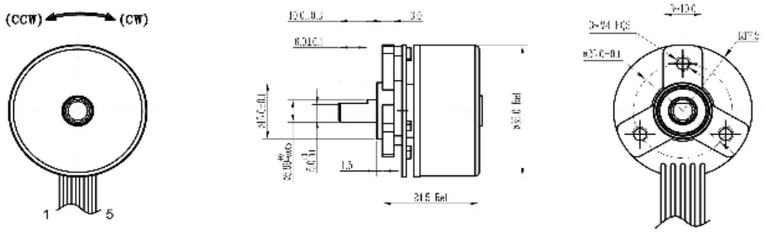



BL4250

Versatile 42mm Outrunner Motor for RC, Robotics & Light UAV
RC Aircraft / Robot Drive / Drone & UAV

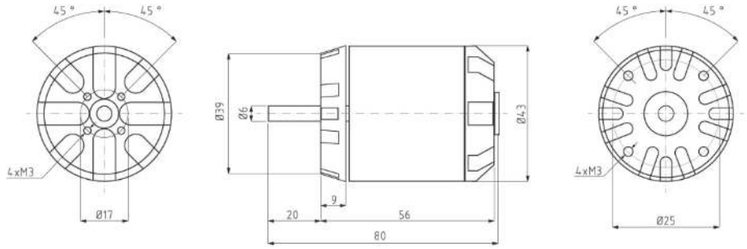


Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall	
	Operating Range (V)	Rated Voltage (V)	Speed (RPM)	Current (A)	Speed (RPM)	Current (A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)
BL3525	8-26	24	3,860	0.39	2,895	2.23	1.44	42.80	2.87	4.8
	11-36	24	9,600	2	7,680	2.1	0.5	39.40	12.24	32
BL4250	11-36	36	7,200	1.8	5,760	1.75	0.8	47.3	12.24	45



GA12-N20/30


Ultra-Compact Gear Motor for Precision Applications
Smart Door Lock / Robotic Platform / Medical Pump

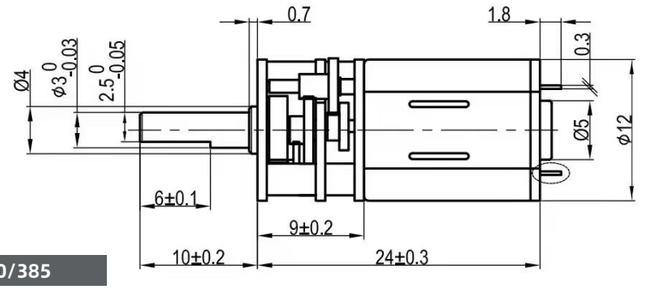



GA25-370/385

Heavy-duty 25mm Gear Motor for Industrial-Grade Applications
Motorized Curtain / Valve Actuator / Coffee Machine

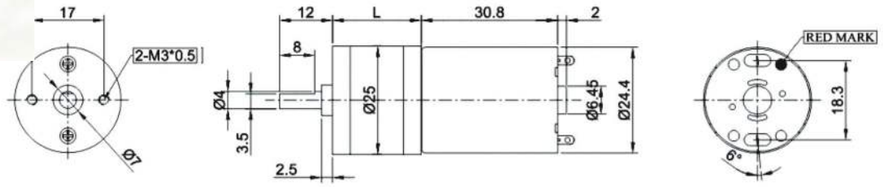

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
GA12-N20	3-9	36	2000	0.04	1500	0.15	0.026	0.40	0.12	0.5	10:1	9
	3-9	6	200	0.03	160	0.06	0.098	0.16	1.1	0.23	50:1	9
	3-9	6	60	0.03	50	0.05	0.263	0.14	3.2	1	298:1	9
	1.5-5	3	200	0.03	160	0.07	0.027	0.04	0.28	0.18	30:1	9
	6-12	12	800	0.04	680	0.16	0.108	0.75	1.1	0.4	30:1	9
GA12-N30	3-9	6	300	0.15	240	0.2	0.14	0.35	4	1.1	50:1	9
GA25-370	6-15	12	399	0.1	280	0.4	0.6	1.72	2.4	1.8	21:1	19
	6-15	12	108	0.1	76	0.4	2	1.56	8.6	1.8	78:1	23
	6-15	12	37	0.1	26	0.4	5	1.33	20	1.8	226:1	25
	12-28	24	399	0.05	280	0.2	0.6	1.72	2.4	1.2	21:1	19
	12-28	24	108	0.05	76	0.2	2	1.56	8.6	1.2	78:1	23
GA25-385	12-28	24	102	0.1	82	0.25	2.4	2.02	11.5	1.55	78:1	23

DC Spur Gear Motor



JGB37-520/3530


Versatile 37mm Gear Motor for Robotics & Smart Automation
Smart Home Device / Beauty Instrument / Camera Module

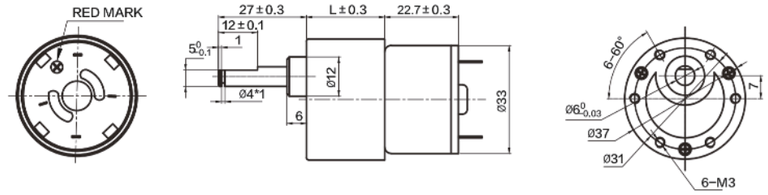



JGB37-545/555


High-Torque 37mm Gear Motor for Heavy-Duty Drive Systems
Electric Wheelchair / Scooter / Industrial Feeder

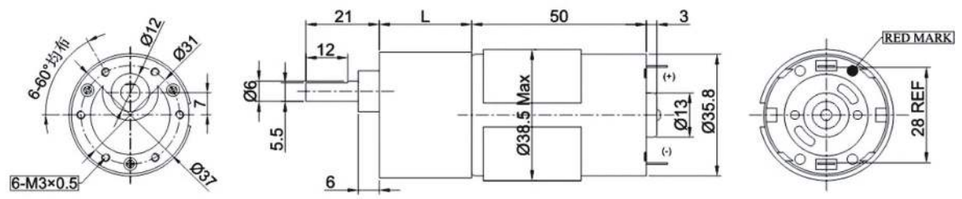



GA25-BL2430


Brushless Spur Gear Motor for Low-Noise Long-Life Applications
Smart Shelf / Vending Machine / Medical Equipment

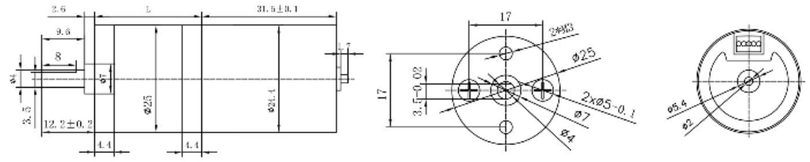



JGB37-BL3650

High-Power Brushless 37mm Gear Motor for 24/7 Robotics
AMR Robot / Automated Dispensing / Industrial Conveyor

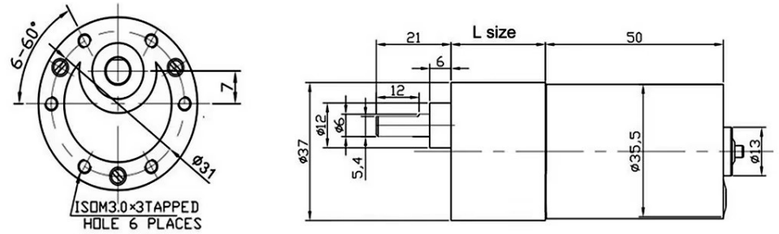

Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
JGB37-520	9-15	12	260	0.06	200	0.53	0.12	0.25	0.42	2.6	30:1	21.5
	9-15	12	158	0.09	130	0.43	0.18	0.24	0.8	2.7	50:1	24
	12-24	24	58	0.07	49	0.18	0.35	0.18	1.77	2.3	90:1	24
JGB37-3530	9-15	12	21	0.036	17	0.06	1.5	0.26	5.7	0.32	150:1	26.5
	9-15	12	38	0.09	30	0.4	6.2	1.91	23	2.6	210:1	26.5
JGB37-545	15-21	18	206	0.182	169	0.84	4.4	7.63	24.72	3.9	23:1	24
	21-27	24	205	0.095	172	0.49	3.29	5.81	20.41	2.57	23:1	24
JGB37-555	14-36	24	140	0.78	112	3.12	12.6	14.49	37.7	15.6	57:1	25
	14-36	24	48	0.78	38	3.12	36.8	14.36	110.4	15.6	167:1	27.5
	14-36	24	30	0.78	24	3.12	59.5	14.67	178.5	15.6	270:1	27.5

Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
GA25-BL2430	12-28	24	133	0.14	130	0.31	2.5	3.34	8.6	0.8	45:1	21
	12-28	24	88	0.14	85	0.31	4	3.50	13.2	0.8	68:1	21
	12-28	24	61	0.14	45	0.31	3.3	1.52	17.5	0.8	99:1	23
JGB37-BL3650	8-18	12	421	0.38	340	1.2	1.5	5.24	7	3.8	19:1	22
	12-28	24	340	0.25	340	0.7	2	6.98	12	3.5	19:1	22
	12-28	24	113	0.25	113	0.7	9	10.44	28	3.5	56:1	24
	12-28	24	49	0.25	49	0.7	14	7.04	35	3.5	131:1	26.5


DC Planetary Gear Motor



PG22-130/180

Ultra-Miniature Planetary Motor for High-Precision Micro Drives

Endoscope / Micro Pump / Smart Lock Actuator

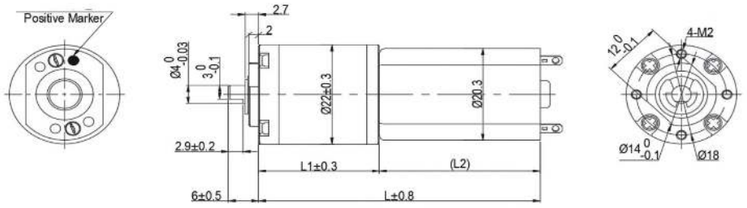




PG24-370/385

Compact Planetary Motor with Superior Torque-to-Size Ratio

Camera PTZ / Syringe Pump / Valve Controller

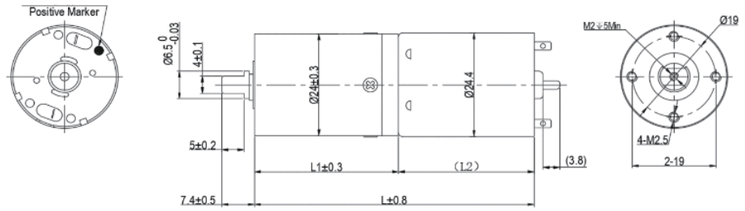

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
PG22-130	6-18	12	233	0.13	175	0.38	00.8	1.44	2.57	1.2	64:1	20.5
	6-18	12	149	0.15	112	0.45	1.26	1.45	4.02	1.2	100:1	20.5
	6-18	12	87	0.2	66	0.57	2.15	1.46	6.88	1.2	171:1	20.5
PG22-180	3-8	5	472	0.3	367	1.22	0.32	1.21	1.15	3	19:1	17
	3-8	5	399	0.3	310	1.22	0.38	1.21	1.37	3	22.5:1	17
	3-8	5	249	0.3	194	1.22	0.61	1.22	2.19	3	36:1	17
PG24-370	6-15	12	450	0.09	376	0.45	0.37	1.43	1.83	1.5	20:1	17
	6-15	12	231	0.1	199	0.6	1.36	2.78	7.96	3.8	64:1	20.5
	6-15	12	148	0.13	128	0.68	2.12	2.79	12.43	3.8	100:1	20.5
PG24-385	12-26	24	150	0.15	120	0.8	3.5	4.31	16	4.5	100:1	20.5
	12-26	24	80	0.18	65	0.9	6.5	4.34	28	5	200:1	24



PG28-385/395

Mid-Frame Planetary Motor for Precision Industrial Positioning

Robotic Arm / Laser Scanner / Automated Valve

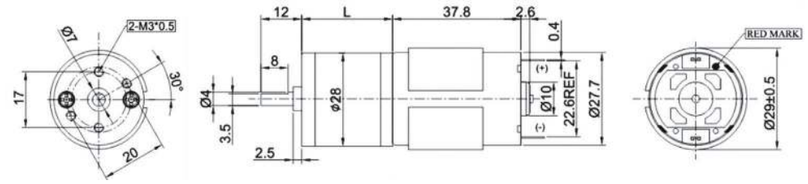




PG36-545/555

High-Torque Planetary Motor for Demanding Industrial Automation

AGV Drive / Electric Linear Actuator / Industrial Pump

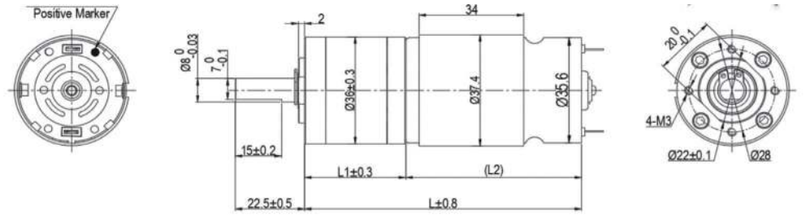

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
PG28-385	12-22	18	232	0.3	188	1.2	2.83	5.47	11.94	4.32	64:1	33.1
	12-22	18	148	0.4	120	1.5	4.42	5.44	18.65	4.32	100:1	33.1
PG28-395	12-28	24	449	0.09	385	0.55	1.2	4.74	6.75	2.23	20:1	27.4
	12-28	24	450	0.12	370	0.9	1.8	6.84	10	3.5	20:1	27.4
PG36-545	12-28	24	150	0.18	120	1.8	6.5	8.01	28	6	100:1	33.1
	12-28	24	140	0.25	112	1	4.5	5.18	20	4	51:1	39
PG36-555	12-28	24	72	0.25	58	1	7	4.17	30	4	100:1	39
	12-28	24	165	0.3	133	1.21	3.62	4.94	14.82	4	51:1	39
	12-28	24	48	0.26	42	2.09	21.74	9.37	80	10	187:1	45.2
	12-28	24	24	0.26	21	2.09	42.67	9.2	80	10	367:1	45.2



PG42-775/795

Heavy-Duty Planetary Motor for High-Load Continuous Operation

Logistics Robot / Lifting Platform / Pallet Mover

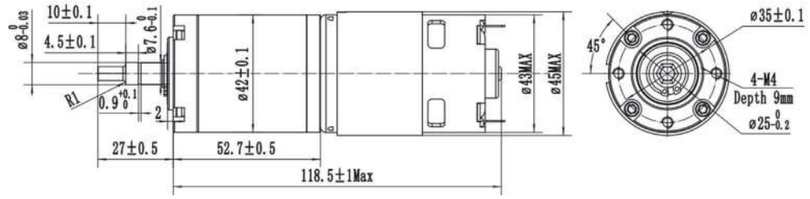




PG36-BL3650


Heavy-Duty Planetary Motor for High-Load Continuous Operation

Medical Robot / Surveillance PTZ / Precision Actuator

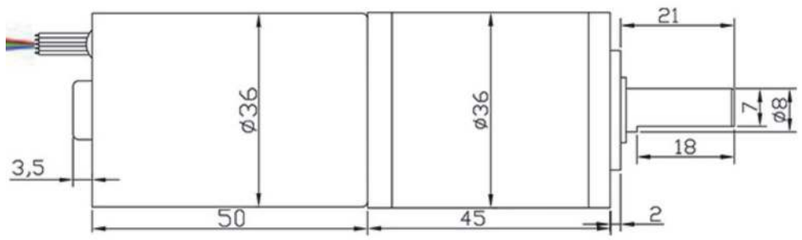

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
PG42-775	15-24	20	352	1.02	277	4.06	8.37	23.80	31.28	12	24:1	42.5
	18-28	24	108	0.92	85	3.52	26.6	23.22	100.79	19	84:1	54
	18-28	24	57	1.03	45	3.52	50.66	23.40	150	19	160:1	54
	22-32	28	1676	0.71	1321	2.85	0.56	7.59	10.25	9	5.4:1	31
PG42-795	18-28	24	110	1.2	88	5	34	30.72	130	25	84:1	54
	18-28	24	58	1.4	46	5	65	30.69	195	25	160:1	54
PG36-BL3650	8-16	12	296	0.25	237	1.5	10.8	26.3	32.4	7.5	27:1	32.7
	16-28	24	296	0.27	237	1.215	10.8	26.3	32.4	6.08	27:1	32.7
	16-28	24	81	0.27	65	1.215	37.3	24.91	157.3	6.08	99:1	38.9



1218-N20/30

Miniature Self-Locking Worm Motor for Compact Position-Hold Drives

Smart Blind / Micro Valve / Jewelry Box Actuator

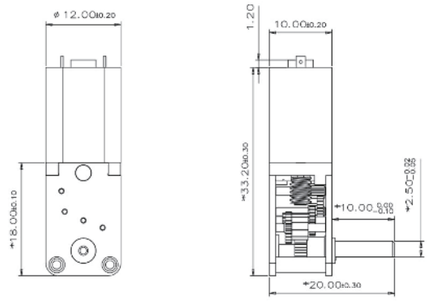




JGY4632-370/385

Compact Self-Locking Worm Motor for Reliable Static Holding

Security Camera Pan / Electric Lock / Small Gate

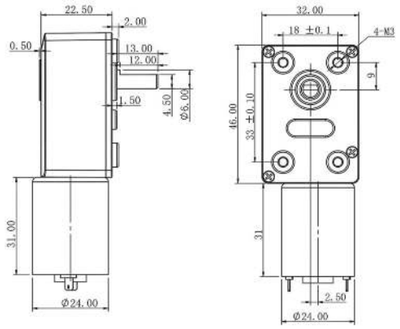

Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current (A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Gearbox Length (mm)
1218-N20	2-4	3	95	0.125	78	0.5	0.2	0.16	0.89	2.54	236:1	18
	4-6	5	20	0.02	17	0.03	0.1	0.02	0.53	0.11	301:1	18
1218-N30	5-7	6	98	0.074	80	0.43	0.3	0.25	1.31	1.7	236:1	18
	5-7	6	60	0.078	50	0.26	0.4	0.21	1.92	2.2	301:1	18
JGY4632-370	6-15	12	90	0.06	70	0.2	2	1.44	6	1.3	65:1	46
	6-15	12	40	0.06	30	0.2	4.5	1.39	15	1.3	150:1	46
JGY4632-385	6-15	12	92	0.15	75	0.7	3	2.31	6	2.4	87:1	46
	12-26	24	92	0.08	43	0.5	3	1.32	15	2.4	87:1	46
	12-26	24	40	0.08	19	0.5	7	1.37	30	2.4	200:1	46


DC Worm Gear Motor



JGY5840-555

Mid-Size Worm Motor for Quiet Low-Speed High-Torque Drives

BBQ Rotisserie / Display Turntable / Solar Tracker

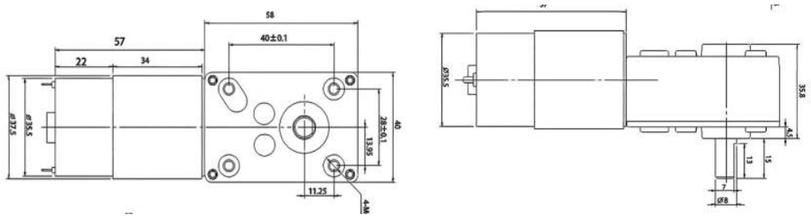




JGY5840-31ZY

High-Torque Worm Motor for Industrial Position Control

Industrial Gate / Conveyor Diverter / Packaging Machine

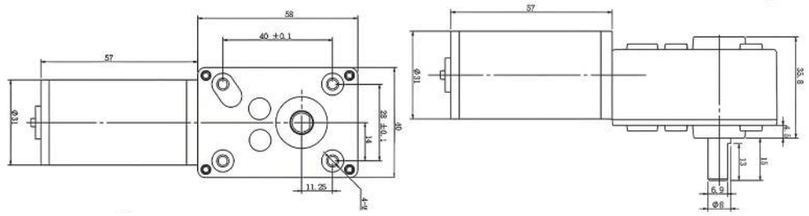






JGY5882-775

Heavy-Duty Worm Motor for Large-Scale Torque Applications


Automatic Barrier Gate / Truck Tailgate / Dock Leveler

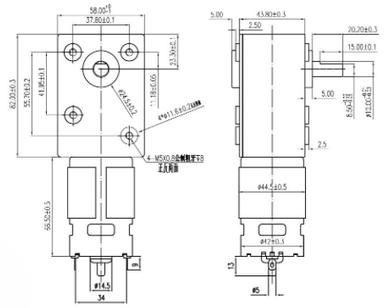

JGY5882-BL4260

Brushless Heavy-Duty Worm Motor for 24/7 Industrial Operation

Industrial Automation / Warehouse Door / Rolling Shutter Drive

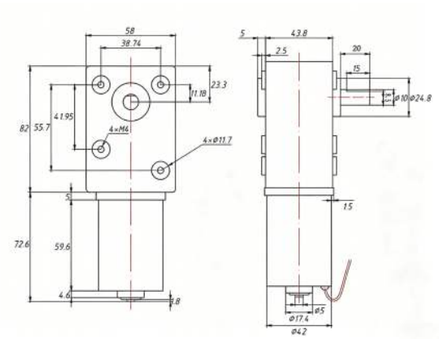

Specification

Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
JGY5840-555	6-15	12	160	0.65	130	2.6	6.4	8.54	25.6	13	50:1	58
	6-15	12	80	0.65	60	2.6	12.9	7.95	51.6	13	100:1	58
	6-15	12	40	0.65	30	2.6	25.8	7.95	103.2	13	200:1	58
JGY5840-31ZY	6-18	12	160	0.35	136	1.5	10	13.96	45	6.7	50:1	58
	6-18	12	80	0.35	68	1.5	20	13.96	76.5	6.7	100:1	58
	6-18	12	40	0.35	34	1.5	40	13.96	80	6.7	200:1	58

Specification


Model	Voltage		No-Load		At Max. Efficiency				Stall		Gearbox	
	Operating Range (V)	Rated Voltage (V)	Speed(RPM)	Current(A)	Speed (RPM)	Current(A)	Torque (kgf.cm)	Output Power (W)	Torque (kgf.cm)	Current (A)	Reduction Ratio	Length (mm)
JGY5882-775	6-18	12	120	0.9	100	4.4	24	24.64	175	27.7	50:1	82
	6-18	12	60	0.9	50	4.4	48	24.64	350	27.7	100:1	82
	6-18	12	34	0.9	28	4.4	86	24.72	400	27.7	176:1	82
JGY5882-BL4260	6-18	12	160	1	130	3.6	14	18.69	70	15	50:1	82
	6-18	12	80	1	65	3.6	28	18.69	140	15	100:1	82
	6-18	12	45	1	37	3.6	49	18.61	200	15	176:1	82



Y40

Wind-Powered Louver Gearbox Engineered for Evaporative Air Coolers
Evaporative Air Cooler / Swamp Cooler


Reduction Ratio: 318:1, 400: 1

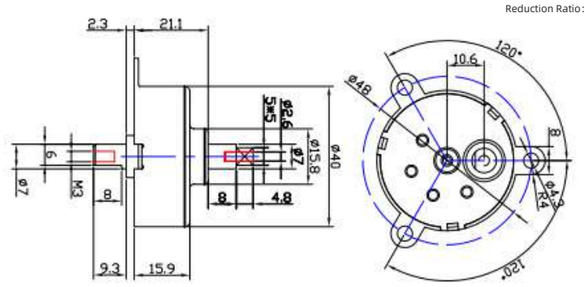



PG36/42

High-Precision Planetary Gearbox for Brush & Brushless DC Motor Pairing
DC Gear Drive / Robotic Joint / Automated Actuator

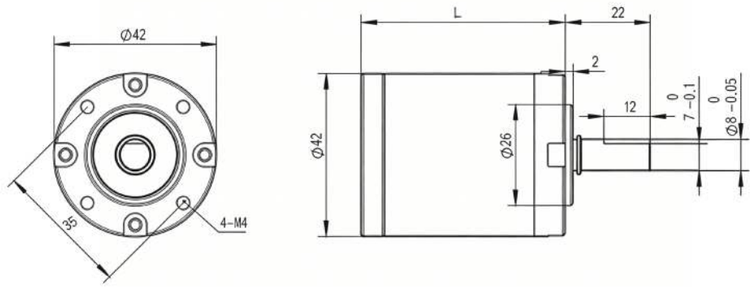


Specification

Model	Stage	Reduction Ratio	Rated Torque (kgf·cm)	Max. Momentary Torque (kgf·cm)	Efficiency (%)	Gearbox L (mm)
PG36	1	5.2:1	5	15	80	27.3
	2	19.2:1	15	40	70	35.4
	2	27:1	15	40	70	35.4
	3	50.5:1	30	80	60	43.5
	3	100:1	30	80	60	43.5
	4	187.5:1	50 MAX	150 MAX	50	54.6
PG42	1	5:1	5	15	80	33.1
	2	18.5:1	25	75	70	41.2
	2	25:1	25	75	70	41.2
	3	50.5:1	70	210	60	49.3
	3	125:1	70	210	60	49.3
	4	187.5:1	70 MAX	210 MAX	50	60.4



1404

Micro Powerhouse for Toothpick & Cinewhoop Builds
Indoor FPV / Micro Racing Drone / Cinewhoop

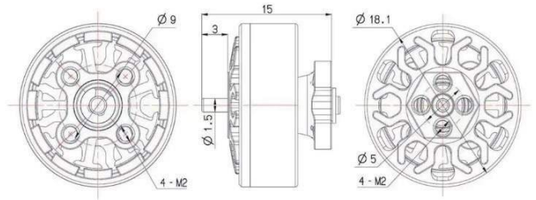

1404 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
3000KV	3-4S LiPo (11.1V - 14.8V)	220.8	13.8	309	9N12P	12cm/26AWG	9.1
3800KV		253.4	15.8	220			
4600KV		287.8	18.0	159			


1404 Test Data (at 100% Throttle)

KV	Propeller	Voltage (V)	Max. Continuous Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
3000KV	4030	16	13.8	489.0	220.8	2.21	55°C
3800KV			15.8	512.0	253.4	2.02	62°C
4600KV			18.0	574.0	287.8	1.99	65°C



2212

The Classic Choice for Entry-Level Aerial & DIY Drones
Photography Drone / Training UAV / DIY Quadcopter

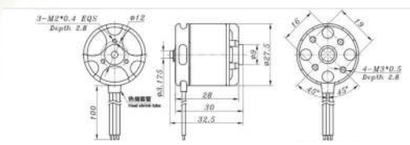

2212 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
980KV	3S LiPo (11.1V)	146.5	13.2	92	12N14P	10cm/18AWG	59
1250KV		262.0	23.6	54			
1400KV		338.6	30.5	43			

2212 Test Data (at 100% Throttle)


KV	Propeller	Voltage (V)	Max. Continuous Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
980KV	9047	11.1	13.2	840.0	146.5	5.73	76°C (10min)
1250KV			23.6	1220.0	262.0	4.66	65°C (10min)
1400KV			30.5	1380.0	338.6	4.08	77°C (3min)

Drone Motor



2306

Race-Tuned Motor Built for Speed, Agility & FPV Performance
FPV Racing / 5" Freestyle / Competitive UAV

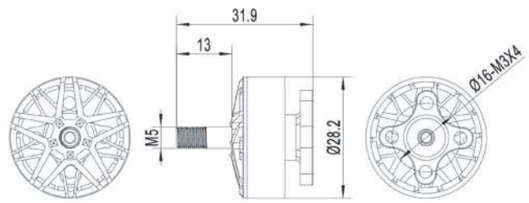

2306 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
1750KV	6S LiPo (24V)	210.0	35.7	72	12N14P	15cm/20AWG	49
1950KV		241.0	39.1	63			


2306 Test Data (at 100% Throttle)

KV	Propeller	Voltage (V)	Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
1750KV	5146	24.8	35.7	1593.0	885.4	1.80	65°C
1950KV		22.4	37.6	1591.0	843.0	1.90	70°C



3115/3120

High-Thrust Motor for Heavy-Lift & Long-Endurance Missions
Agricultural Drone / Cargo UAV / Survey Platform

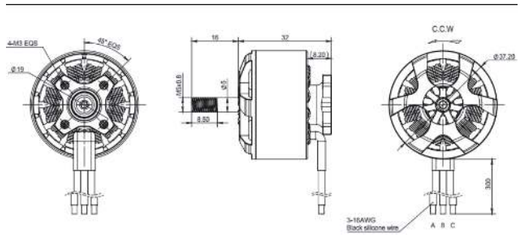

3115/3120 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
3115 900KV	4-6S LiPo(24V)	1200.0	81.0	41	12N14P	16cm/20AWG	125.0
3120 700KV	8S LiPo(24V)	2258.5	76.3	52			140.0


3115/3120 Test Data (at 100% Throttle)

KV	Propeller	Voltage (V)	Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
3115 900KV	9050 (3-blade)	24.0	64.0	4729.0	1535.0	3.08	88°C
3120 700KV	1050 (3-blade)	32.5	72.5	5041.0	2356.3	2.14	91.6°C



2807

Balanced Thrust & Efficiency for Smooth Cinematic Flight
Cine Drone / Long-Range FPV / 5-7" Hybrid Build

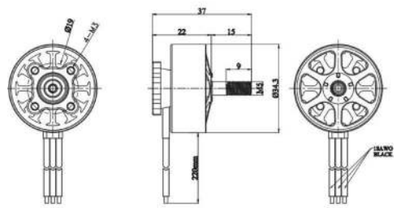

2807 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
1350KV	6S LiPo(24V)	1123.0	46.19	58	12N14P	26cm/18AWG	60

2807 Test Data (at 100% Throttle)


KV	Propeller	Voltage (V)	Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
1350KV	7037	24.31	45.8	2722	1113.6	2.44	95°C (10min)

Remark: Temperature recorded at maximum throttle; typical cinematic operation maintains significantly lower thermal load.



4214

Maximum Thrust for Large-Frame Professional UAV Systems
Heavy-Lift UAV / Industrial Inspection / eVTOL Platform

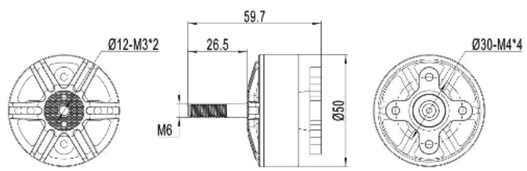


4214 Specification

KV	Operating Voltage	Max. Continuous Power (W)	Max. Continuous Current (A)	Phase Resistance (mΩ)	Configuration	Lead	Weight (g)
380KV	6-8S LiPo(24V)	1693	53.51	83.4	12N14P	14cm/80AWG	249

4214 Test Data (at 100% Throttle)

KV	Propeller	Voltage (V)	Current (A)	Thrust (g)	Power (W)	Efficiency (g/W)	Temperature
380KV	1570 (2-blade)	23.73	41.3	4265	980	4.35	85°C (10min)

Remark: Temperature recorded at maximum throttle; typical cinematic operation maintains significantly lower thermal load.

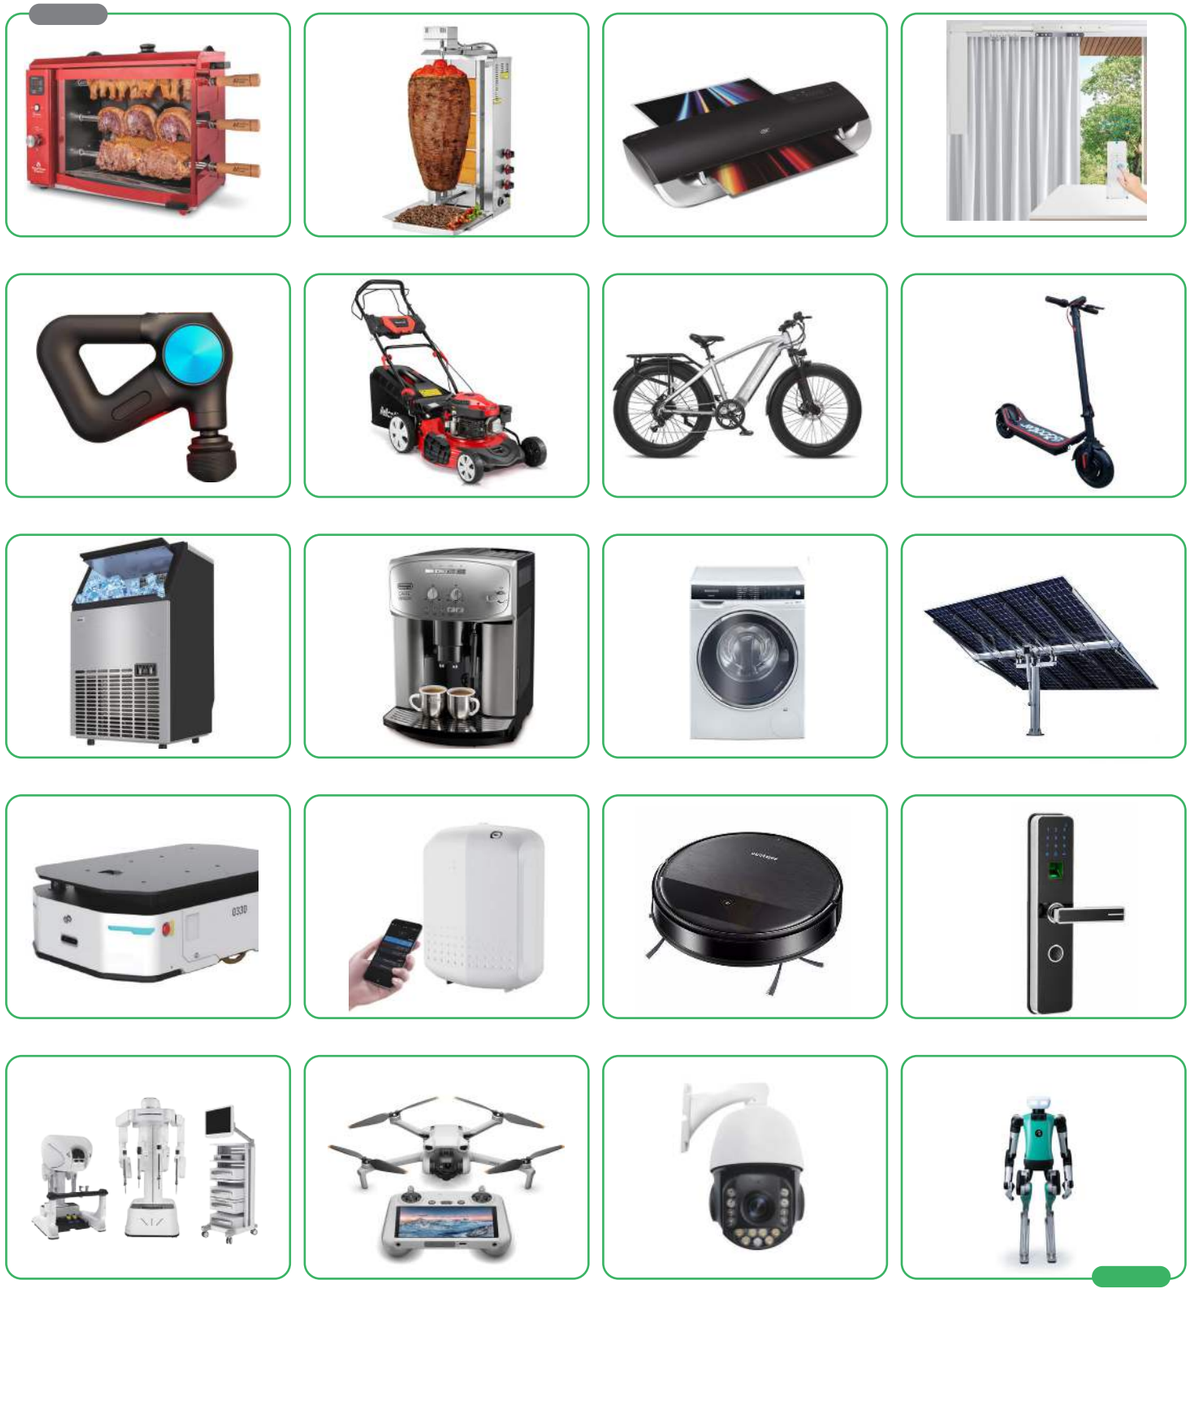

FAQ — Building Trust Through Every Answer

Q1. Are you a trading company or a manufacturer?
We are a professional micro-motor manufacturer with our own R&D team and production facility. Backed by over 30 years of manufacturing heritage, our integrated trade-and-manufacturing model lets us guarantee quality, control costs, and respond to your requirements quickly and directly.

Q2. Do you provide OEM / ODM and customization services?
Yes. Our in-house engineering team customizes motors to your exact requirements — torque, speed, voltage, shaft, gearbox ratio, connection type, and more. From your concept or drawings to a finished, production-ready motor, we support full OEM and ODM development.

Q3. Can you send me a price list?
All our motors are tailored to different requirements such as torque, voltage, and shaft specifications, and prices also vary with order quantity. Please share your detailed specifications and target quantity, and we will send you a prompt, accurate quotation.

Q4. What certifications do your products hold?
Our quality system is certified to ISO 9001:2015, and our motors can be supplied with VDE, CB, CE, 3C, and RoHS certification to meet the compliance needs of different markets worldwide.

Q5. How do we confirm requirements before mass production?
There are two ways:
1.We produce samples based on your drawings or technical specifications; mass production begins only after your confirmation.
2.You send us your samples, and we develop matching ones accordingly; mass production starts once you approve our samples.

Q6. How do you guarantee product quality?
We carry out in-process inspection after every key production stage and perform 100% full inspection before shipment, ensuring stable and reliable quality on every order.

Q7. What is your minimum order quantity (MOQ)?
Our standard MOQ is 5,000 units. For new or trial projects, please contact us — we are glad to discuss a workable arrangement based on your specific needs.

Q8. How long is the production and delivery time?
Lead time depends on order quantity. For standard orders, delivery is normally within 25-35 days after the order and samples are confirmed.

Q9. What are your packing terms?
Standard products are supplied under our own brand packaging, while orders can also be packed in neutral boxes and brown export cartons on request. For OEM customers, we are pleased to pack the products in your own branded packaging — simply provide your logo artwork and, where a registered trademark is involved, the corresponding authorization letter.

Q10. What trade (delivery) terms do you accept?
We accept EXW, FOB, CIF, and other mainstream trade terms — you may choose the option that is most convenient and cost-effective for you.

Q11. What are your payment terms?
30% T/T deposit, with the 70% balance settled before shipment. We will send you photos of the finished products and packaging for confirmation before you pay the balance.

Q12. How do you handle quality issues after sales?
Please send us photos showing the problem. Once confirmed, we will provide a satisfactory solution within 3 working days.