

V Bank Filter

Application


It is suitable for the final stage of filtration in various ventilation equipment, dust removal equipment, and air supply systems with high requirements for cleanliness.



Features

- ◆ Large filter area and high dust holding capacity.
Uniform pleat spacing;
- ◆ High air flow and low resistance;
- ◆ Water and moisture resistance;
- ◆ Resistance to temperature $\leq 80^{\circ}\text{C}$;
- ◆ Humidity resistance $\leq 100\% \text{ RH}$.

Curve of Air Flow and Resistance

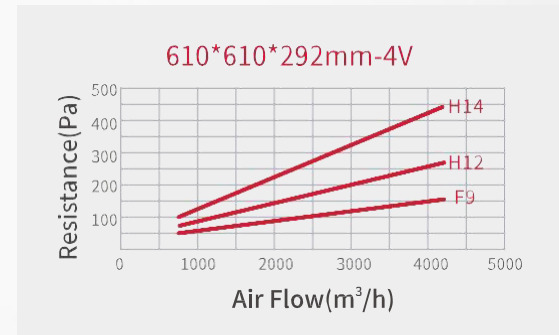

Specifications

V Bank Filter - Flange type(GI frame)

Model	Size (mm)	Rated airflow (m³/h)	I.N.P (Pa)	F.N.P (Pa)	Filter object (μm)	EFF. (%)	Filtration Class	Filter area (m²)	Header thickness (mm)
RT-VB8805FM-5V08	610*610*292-5V	2200/4200	<65/120	<450/600	0.5	90≤E<95	F8	23.82	20/25
RT-VB8805FM-4V08	610*610*292-4V	1800/3600	<65/120	<450/600	0.5	90≤E<95	F8	19.06	20/25
RT-VB8205FM-4V08	610*305*292-4V	1000/2000	<65/120	<450/600	0.5	90≤E<95	F8	9.41	20/25
RT-VB8805FM-5V09	610*610*292-5V	2200/4200	<75/135	<450/600	0.5	95≤E	F9	23.82	20/25
RT-VB8805FM-4V09	610*610*292-4V	1800/3600	<75/135	<450/600	0.5	95≤E	F9	19.06	20/25
RT-VB8205FM-4V09	610*305*292-4V	1000/2000	<75/135	<450/600	0.5	95≤E	F9	9.41	20/25
RT-VB8805FM-5V10	610*610*292-5V	2200/4200	<90/160	<450/600	0.3	85≤E<95	E10	23.82	20/25
RT-VB8805FM-4V10	610*610*292-4V	1800/3600	<90/160	<450/600	0.3	85≤E<95	E10	19.06	20/25
RT-VB8205FM-4V10	610*305*292-4V	1000/2000	<90/160	<450/600	0.3	85≤E<95	E10	9.41	20/25
RT-VB8805FM-5V11	610*610*292-5V	2200/4200	<100/180	<450/600	0.3	95≤E<99.5	E11	23.82	20/25
RT-VB8805FM-4V11	610*610*292-4V	1800/3600	<100/180	<450/600	0.3	95≤E<99.5	E11	19.06	20/25
RT-VB8205FM-4V11	610*305*292-4V	1000/2000	<100/180	<450/600	0.3	95≤E<99.5	E11	9.41	20/25
RT-VB8805FM-5V12	610*610*292-5V	2200/4200	<130/220	<450/600	0.3	99.5≤E<99.95	E12	23.82	20/25
RT-VB8805FM-4V12	610*610*292-4V	1800/3600	<130/220	<450/600	0.3	99.5≤E<99.95	E12	19.06	20/25
RT-VB8205FM-4V12	610*305*292-4V	1000/2000	<130/220	<450/600	0.3	99.5≤E<99.95	E12	9.41	20/25
RT-VB8805FM-5V13	610*610*292-5V	2200/4200	<180/280	<450/600	0.3	99.95≤E<99.995	H13	23.82	20/25
RT-VB8805FM-4V13	610*610*292-4V	1800/3600	<180/280	<450/600	0.3	99.95≤E<99.995	H13	19.06	20/25
RT-VB8205FM-4V13	610*305*292-4V	1000/2000	<180/280	<450/600	0.3	99.95≤E<99.995	H13	9.41	20/25
RT-VB8805FM-5V14	610*610*292-5V	2200/4200	<200/300	<450/600	0.3	99.995≤E<99.9995	H14	23.82	20/25
RT-VB8805FM-4V14	610*610*292-4V	1800/3600	<200/300	<450/600	0.3	99.995≤E<99.9995	H14	19.06	20/25
RT-VB8205FM-4V14	610*305*292-4V	1000/2000	<200/300	<450/600	0.3	99.995≤E<99.9995	H14	9.41	20/25