

Application

Secondary or back-end filtration for various ventilation systems, air conditioning systems and dust filtration systems.




Features

- ◆ Excellent filtration performance.
- ◆ High dust holding capacity and low resistance.
- ◆ Good airtightness.
- ◆ Long service life.
- ◆ High strength of the filter bag, not easy to break or fall off.

ISO 16890-2016

Curve of Air Flow and Resistance

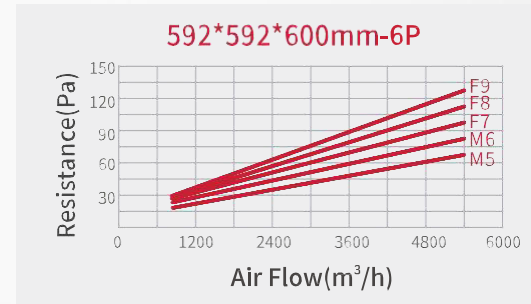

Specifications

Model	Size (mm)	Bags (Pcs)	Rated airflow (m³/h)	I.N.P (Pa)	F.N.P (Pa)	Filter object (µm)	EFF. (%)	Filtration Class	color
RT-DSS7760-8P05	592*592*600	8	2200/3400	<35/45	<450	≥0.4	45	M5	white
RT-DSS7760-6P05	592*592*600	6	2200/3400	<40/50	<450	≥0.4	45	M5	white
RT-DSS5760-5P05	492*592*600	5	2000/3000	<40/50	<400	≥0.4	45	M5	white
RT-DSS1760-4P05	287*592*600	4	1100/1700	<40/50	<400	≥0.4	45	M5	white
RT-DSS7760-8P06	592*592*600	8	2200/3400	<45/65	<400	≥0.4	65	M6	green
RT-DSS7760-6P06	592*592*600	6	2200/3400	<55/75	<400	≥0.4	65	M6	green
RT-DSS5760-5P06	492*592*600	5	2000/3000	<55/75	<400	≥0.4	65	M6	green
RT-DSS1760-4P06	287*592*600	4	1100/1700	<55/75	<400	≥0.4	65	M6	green
RT-DSS7760-8P07	592*592*600	8	2200/3400	<55/80	<400	≥0.4	85	F7	light pink
RT-DSS7760-6P07	592*592*600	6	2200/3400	<60/85	<400	≥0.4	85	F7	light pink
RT-DSS5760-5P07	492*592*600	5	2000/3000	<60/85	<400	≥0.4	85	F7	light pink
RT-DSS1760-4P07	287*592*600	4	1100/1700	<60/85	<400	≥0.4	85	F7	light pink
RT-DSS7760-8P08	592*592*600	8	2200/3400	<60/100	<400	≥0.4	90	F8	light yellow
RT-DSS7760-6P08	592*592*600	6	2200/3400	<65/110	<400	≥0.4	90	F8	light yellow
RT-DSS5760-5P08	492*592*600	5	2000/3000	<65/110	<400	≥0.4	90	F8	light yellow
RT-DSS1760-4P08	287*592*600	4	1100/1700	<65/110	<400	≥0.4	90	F8	light yellow
RT-DSS7760-8P09	592*592*600	8	2200/3400	<65/110	<400	≥0.4	95	F9	white
RT-DSS7760-6P09	592*592*600	6	2200/3400	<70/120	<400	≥0.4	95	F9	white
RT-DSS5760-5P09	492*592*600	5	2000/3000	<70/120	<400	≥0.4	95	F9	white
RT-DSS1760-4P09	287*592*600	4	1100/1700	<70/120	<400	≥0.4	95	F9	white