

Mini Pleat HEPA Filter

Application


It is suitable for back-end filtration in ventilation equipment, dust removal equipment and air supply system with high cleanliness level requirements.



Features

- ◆ Large specific surface area and high dust capacity;
- ◆ Uniform fold spacing;
- ◆ Stable air flow;
- ◆ High filtration efficiency;
- ◆ Low resistance;
- ◆ Water and moisture resistance;
- ◆ Temperature resistance $\leq 80^{\circ}\text{C}$;
- ◆ Humidity resistance $\leq 100\% \text{ RH}$.

Curve of Air Flow and Resistance

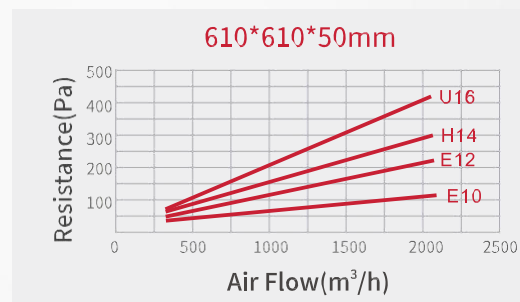

Specifications

Mini Pleat HEPA Filter - Box Type 50D

Model	Size (mm)	Rated airflow (m³/h)	I.N.P (Pa)	F.N.P (Pa)	Filter object (μm)	EFF. (%)	Filtration Class	Filter area (m²)
RT-MP2850-10	305*610*50	350/700	<30/70	<300/500	0.3	85≤E<95	E10	3.85
RT-MP8850-10	610*610*50	650/1300	<30/70	<300/500	0.3	85≤E<95	E10	7.44
RT-MP0850-10	915*610*50	1000/2000	<30/70	<300/500	0.3	85≤E<95	E10	11.04
RT-MPB850-10	1220*610*50	1200/2400	<30/70	<300/500	0.3	85≤E<95	E10	14.59
RT-MP8250-11	610*305*50	350/700	<55/120	<300/500	0.3	95≤E<99.5	E11	3.85
RT-MP8850-11	610*610*50	650/1300	<55/120	<300/500	0.3	95≤E<99.5	E11	7.44
RT-MP0850-11	915*610*50	1000/2000	<55/120	<300/500	0.3	95≤E<99.5	E11	11.04
RT-MPB850-11	1220*610*50	1200/2400	<55/120	<300/500	0.3	95≤E<99.5	E11	14.59
RT-MP8250-12	610*305*50	350/700	<75/160	<300/500	0.3	99.5≤E<99.95	E12	3.85
RT-MP8850-12	610*610*50	650/1300	<75/160	<300/500	0.3	99.5≤E<99.95	E12	7.44
RT-MP0850-12	915*610*50	1000/2000	<75/160	<300/500	0.3	99.5≤E<99.95	E12	11.04
RT-MPB850-12	1220*610*50	1200/2400	<75/160	<300/500	0.3	99.5≤E<99.95	E12	14.59
RT-MP8250-13	610*305*50	350/700	<100/190	<300/500	0.3	99.95≤E<99.995	H13	3.85
RT-MP8850-13	610*610*50	650/1300	<100/190	<300/500	0.3	99.95≤E<99.995	H13	7.44
RT-MP0850-13	915*610*50	1000/2000	<100/190	<300/500	0.3	99.95≤E<99.995	H13	11.04
RT-MPB850-13	1220*610*50	1200/2400	<100/190	<300/500	0.3	99.95≤E<99.995	H13	14.59