


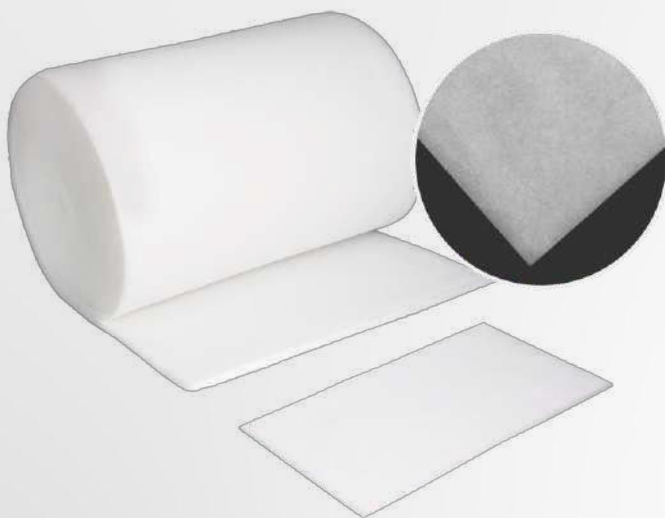

Features

- ◆ Resistant to fracture, high elasticity;
- ◆ Step by step encryption of filter fibers and stratified filtration;
- ◆ Large dust holding capacity and stable performance;
- ◆ Long using life;
- ◆ Silicone free;
- ◆ Available to supply in cut pad or rolls;
- ◆ Washable.

Application

- ◆ Suitable for pre-filtration of various ventilation systems, air-conditioning systems and dust removal systems.

Technical parameters

Main material	Polyester fiber(PET)	Flammability rating	F1(DIN 53438)/B1(GB/T 17591-2006)
Filtration class	G2、G3、G4(EN779)	Dust holding capacity	300g/m ² 、400g/m ² 、500g/m ² 、600g/m ²
Filter object	Coarse dust and foreign matter≥5μm	Temperature resistance	100°C
Final resistance	250Pa(Suggestion)	Temp. short peak	120°C
Average weight efficiency	95%(ASHRAE52.1-1992)	Humidity resistance	100%

Specifications

Model	Filtration class	Thickness (mm)	Weight (g/m ²)	I.N.P (Pa)	Rated air velocity (m/s)	Rated air flow (m ³ /h)
RT-C05	G2	5	120	15	1.5	5400
RT-C10	G3	10	150	18	1.5	5400
RT-C15	G4	15	180	22	1.5	5400
RT-C18	G4	18	200	25	1.5	5400
RT-C20	G4	20	220	28	1.5	5400
RT-C22	G4	22	250	30	1.5	5400