




Application

It is suitable for the final stage of filtration in various ventilation equipment, dust removal equipment, and air supply systems with high requirements for cleanliness.

Feartures

- Large filter area and high dust holding capacity.
- Uniform pleat spacing
- High air flow and low resistance
- Water and moisture resistance
- Resistance to temperature < 80°C
- Humidity resistance < 100% RH.

Curve Of Airflow And Resistance

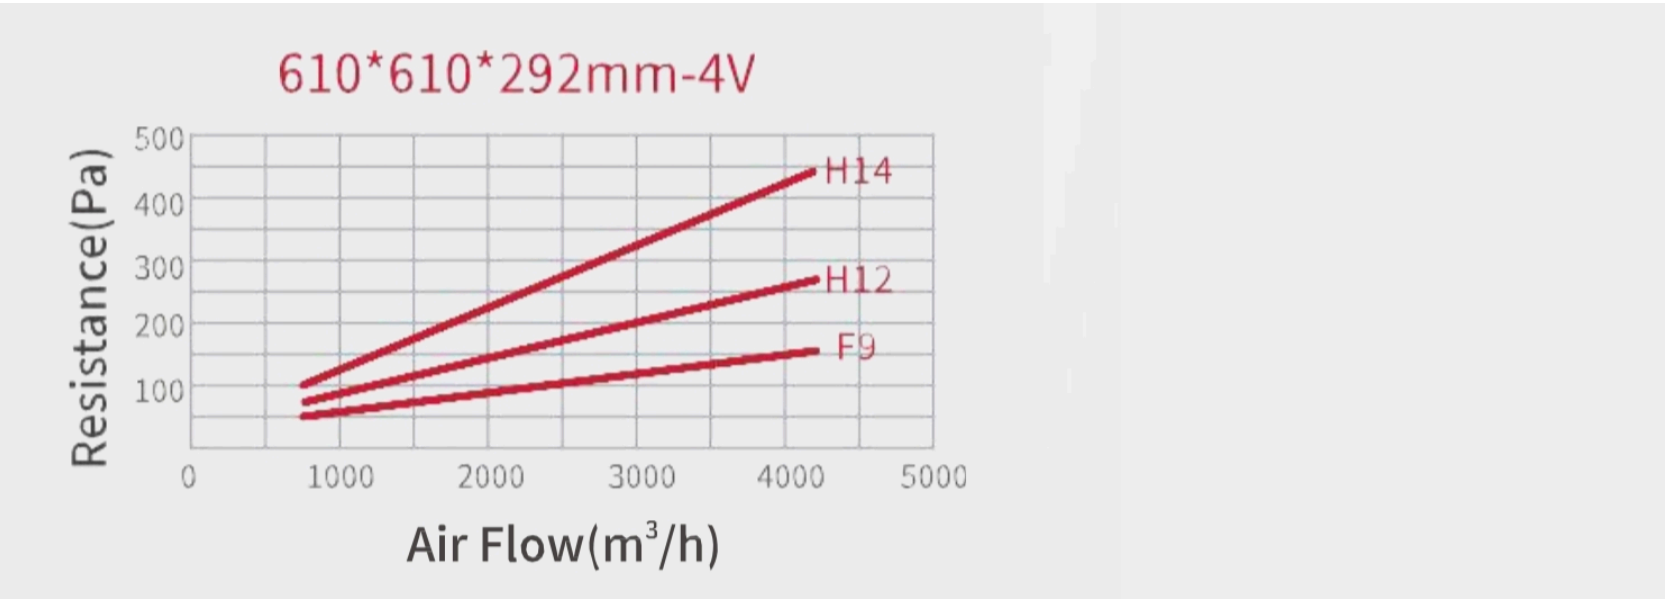

Specifications

Model	Size (mm)	Rated airflow (m³/h)	I.N.P (Pa)	F.N.P (Pa)	Filter object (µm)	EFF. (%)	Filtration Class	Filter area (m²)	Header thickness (mm)
RT-VB8805FM-5V08	610*610*292-5V	2200/4200	<65/120	<450/600	0,5	90≤E<95	F8	23,82	20/25
RT-VB8805FM-4V08	610*610*292-4V	1800/3600	<65/120	<450/600	0,5	90≤E<95	F8	19,06	20/25
RT-VB8205FM-4V08	610*305*292-4V	1000/2000	<65/120	<450/600	0,5	90≤E<95	F8	9,41	20/25
RT-VB8805FM-5V09	610*610*292-5V	2200/4200	<75/135	<450/600	0,5	95≤E	F9	23,82	20/25
RT-VB8805FM-4V09	610*610*292-4V	1800/3600	<75/135	<450/600	0,5	95≤E	F9	19,06	20/25
RT-VB8205FM-4V09	610*305*292-4V	1000/2000	<75/135	<450/600	0,5	95≤E	F9	9,41	20/25
RT-VB8805FM-5V10	610*610*292-5V	2200/4200	<90/160	<450/600	0,3	85≤E<95	E10	23,82	20/25
RT-VB8805FM-4V10	610*610*292-4V	1800/3600	<90/160	<450/600	0,3	85≤E<95	E10	19,06	20/25
RT-VB8205FM-4V10	610*305*292-4V	1000/2000	<90/160	<450/600	0,3	85≤E<95	E10	9,41	20/25
RT-VB8805FM-5V11	610*610*292-5V	2200/4200	<100/170	<450/600	0,3	95≤E<99.5	E11	19,06	20/25
RT-VB8205FM-4V11	610*305*292-4V	1000/2000	<100/170	<450/600	0,3	95≤E<99.5	E11	9,41	20/25
RT-VB8805FM-5V12	610*610*292-5V	2200/4200	<130/220	<450/600	0,3	99.5≤E<99.95	E12	23,82	20/25
RT-VB8805FM-4V12	610*610*292-4V	1800/3600	<130/220	<450/600	0,3	99.5≤E<99.95	E12	19,06	20/25
RT-VB8205FM-4V12	610*305*292-4V	1000/2000	<130/220	<450/600	0,3	99.5≤E<99.95	E12	9,41	20/25
RT-VB8805FM-5V13	610*610*292-5V	2200/4200	<180/300	<450/600	0,3	99.95≤E<99.995	H13	23,82	20/25
RT-VB8805FM-4V13	610*610*292-4V	1800/3600	<180/300	<450/600	0,3	99.95≤E<99.995	H13	19,06	20/25
RT-VB8205FM-4V13	610*305*292-4V	1000/2000	<180/300	<450/600	0,3	99.95≤E<99.995	H13	9,41	20/25
RT-VB8805FM-5V14	610*610*292-5V	2200/4200	<200/300	<450/600	0,3	99.995≤E<99.9995	H14	19,06	20/25
RT-VB8805FM-4V14	610*610*292-4V	1800/3600	<200/300	<450/600	0,3	99.995≤E<99.9995	H14	19,06	20/25
RT-VB8205FM-4V14	610*305*292-4V	1000/2000	<200/300	<450/600	0,3	99.995≤E<99.9995	H14	9,41	20/25