




Feartures

- Excellent filtration performance.
- High dust holding capacity and low resistance.
- Good airtightness.
- Long service life.
- High strength of the filter bag, not easy to break or fall off.
- ISO 16890-2016

Curve Of Airflow And Resistance

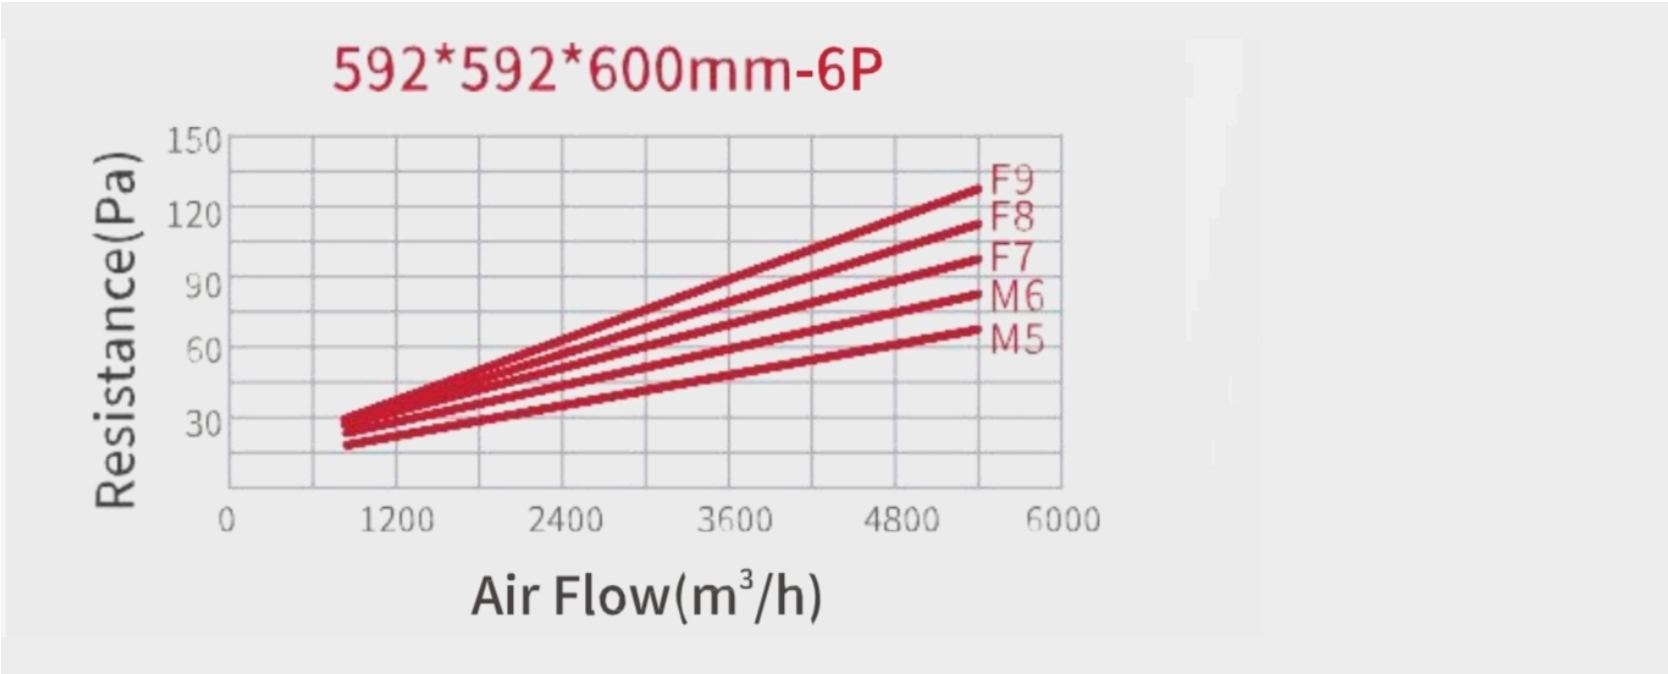

Specifications

| Model           | Size (mm)   | Rated airflow (m³/h) | Bags (Pcs) | I.N.P (Pa) | F.N.P (Pa) | Filter object (µm) | EFF (%) | Filtration Class | Color        |
|-----------------|-------------|----------------------|------------|------------|------------|--------------------|---------|------------------|--------------|
| RT-DSS7760-8P05 | 592*592*600 | 2200/3400            | 8          | <35/45     | <450       | ≥0.4               | 45      | M5               | white        |
| RT-DSS7760-6P05 | 592*592*600 | 2200/3400            | 6          | <40/50     | <450       | ≥0.4               | 45      | M5               | white        |
| RT-DSS5760-5P05 | 492*592*600 | 2000/3000            | 5          | <40/50     | <400       | ≥0.4               | 45      | M5               | white        |
| RT-DSS1760-4P05 | 287*592*600 | 1100/1700            | 4          | <40/50     | <400       | ≥0.4               | 45      | M5               | white        |
| RT-DSS7760-8P06 | 592*592*600 | 2200/3400            | 8          | <45/65     | <400       | ≥0.4               | 65      | M6               | green        |
| RT-DSS7760-6P06 | 592*592*600 | 2200/3400            | 6          | <55/75     | <400       | ≥0.4               | 65      | M6               | green        |
| RT-DSS5760-5P06 | 492*592*600 | 2000/3000            | 5          | <55/75     | <400       | ≥0.4               | 65      | M6               | green        |
| RT-DSS1760-4P06 | 287*592*600 | 1100/1700            | 4          | <55/75     | <400       | ≥0.4               | 65      | M6               | green        |
| RT-DSS7760-8P07 | 592*592*600 | 2200/3400            | 8          | <55/80     | <400       | ≥0.4               | 85      | F7               | light pink   |
| RT-DSS7760-6P07 | 592*592*600 | 2200/3400            | 6          | <60/85     | <400       | ≥0.4               | 85      | F7               | light pink   |
| RT-DSS5760-5P07 | 492*592*600 | 2000/3000            | 5          | <60/85     | <400       | ≥0.4               | 85      | F7               | light pink   |
| RT-DSS1760-4P07 | 287*592*600 | 1100/1700            | 4          | <60/85     | <400       | ≥0.4               | 85      | F7               | light pink   |
| RT-DSS7760-8P08 | 592*592*600 | 2200/3400            | 8          | <60/100    | <400       | ≥0.4               | 90      | F8               | light yellow |
| RT-DSS7760-6P08 | 592*592*600 | 2200/3400            | 6          | <65/110    | <400       | ≥0.4               | 90      | F8               | light yellow |
| RT-DSS5760-5P08 | 492*592*600 | 2000/3000            | 5          | <65/110    | <400       | ≥0.4               | 90      | F8               | light yellow |
| RT-DSS1760-4P08 | 287*592*600 | 1100/1700            | 4          | <65/110    | <400       | ≥0.4               | 90      | F8               | light yellow |
| RT-DSS7760-8P09 | 592*592*600 | 2200/3400            | 8          | <70/120    | <400       | ≥0.4               | 95      | F9               | white        |
| RT-DSS7760-6P09 | 592*592*600 | 2200/3400            | 6          | <70/120    | <400       | ≥0.4               | 95      | F9               | white        |
| RT-DSS5760-5P09 | 492*592*600 | 2000/3000            | 5          | <70/120    | <400       | ≥0.4               | 95      | F9               | white        |
| RT-DSS1760-4P09 | 287*592*600 | 1100/1700            | 4          | <70/120    | <400       | ≥0.4               | 95      | F9               | white        |