




Application

It is suitable for back-end filtration in ventilation equipment, dust removal equipment and air supply system with high cleanliness level requirements.

Feartures

- Large specific surface area and high dust capacity
- Uniform fold spacing
- Stable air flow
- High filtration efficiency
- Low resistance
- Water and moisture resistance
- Temperature resistance < 80 °C
- Humidity resistance < 100% RH.

Curve Of Airflow And Resistance

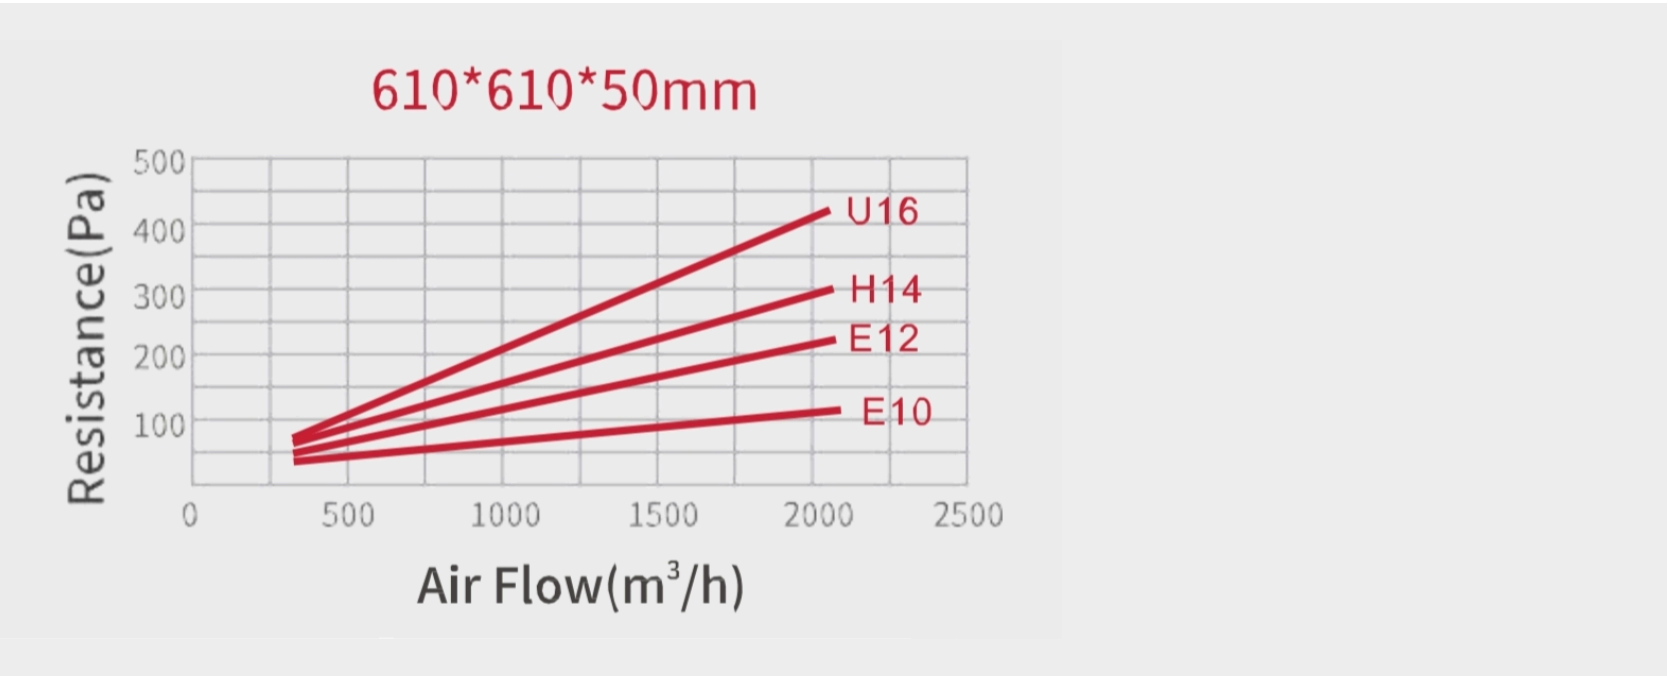

Specifications

Model	Size (mm)	Rated airflow (m³/h)	I.N.P (Pa)	F.N.P (Pa)	Filter object (µm)	EFF. (%)	Filtration Class	Filter area (m²)
RT-MP2850-10	305*610*50	350/700	<30/70	<300/500	0,3	85≤E<95	E10	3,85
RT-MP8850-10	610*610*50	650/1300	<30/70	<300/500	0,3	85≤E<95	E10	7,44
RT-MP0850-10	915*610*50	1000/2000	<30/70	<300/500	0,3	85≤E<95	E10	11,04
RT-MPB850-10	1220*610*50	1200/2400	<30/70	<300/500	0,3	85≤E<95	E10	14,59
RT-MP2850-11	610*305*50	350/700	<55/120	<300/500	0,3	95≤E<99.5	E11	3,85
RT-MP8850-11	610*610*50	650/1300	<55/120	<300/500	0,3	95≤E<99.5	E11	7,44
RT-MP0850-11	915*610*50	1000/2000	<55/120	<300/500	0,3	95≤E<99.5	E11	11,04
RT-MPB850-11	1220*610*50	1200/2400	<55/120	<300/500	0,3	95≤E<99.5	E11	14,59
RT-MP2850-12	610*305*50	350/700	<75/160	<300/500	0,3	99.5≤E<99.95	E12	3,85
RT-MP8850-12	610*610*50	650/1300	<75/160	<300/500	0,3	99.5≤E<99.95	E12	7,44
RT-MP0850-12	915*610*50	1000/2000	<75/160	<300/500	0,3	99.5≤E<99.95	E12	11,04
RT-MPB850-12	1220*610*50	1200/2400	<75/160	<300/500	0,3	99.5≤E<99.95	E12	14,59
RT-MP2850-13	610*305*50	350/700	<100/190	<300/500	0,3	99.95≤E<99.995	H13	3,85
RT-MP8850-13	610*610*50	650/1300	<100/190	<300/500	0,3	99.95≤E<99.995	H13	7,44
RT-MP0850-13	915*610*50	1000/2000	<100/190	<300/500	0,3	99.95≤E<99.995	H13	11,04
RT-MPB850-13	1220*610*50	1200/2400	<100/190	<300/500	0,3	99.95≤E<99.995	H13	14,59