CHIPTUNE USB/CV / ENCLOSURE

Dimensions in mm / diagram not to scale / drawing-only annotations

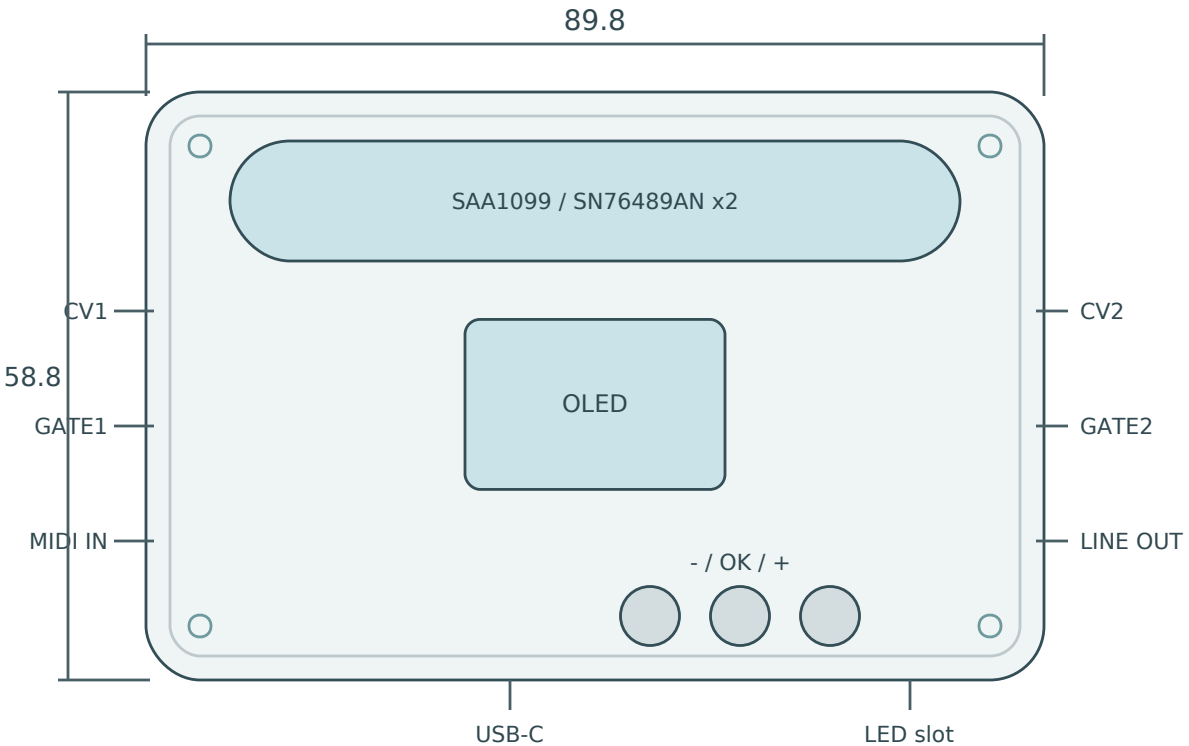

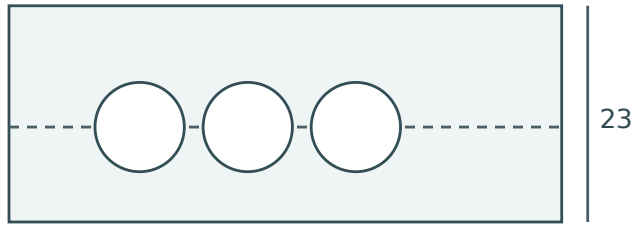

SIDE / TRS relief: diameter 9.5

Port pitch: 11.5 / seam at jack axis

HEIGHT STACK

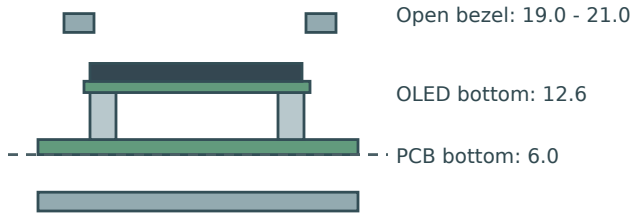

Separate OLED module on 5 mm PCB spacers

TOP / PCB hole centres: (3,3), (82,3), (3,51), (82,51)

Four M2 x 10 screws from the underside; heat-set inserts in lid posts.

Blue circles: PCB holes, hidden under the assembled lid.

FIT COUPON / 58 x 16 x 5

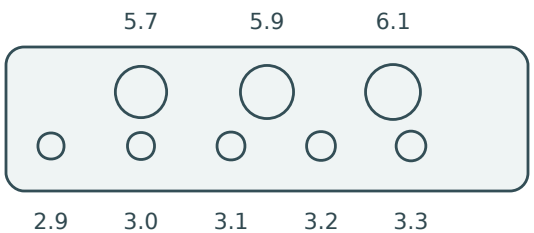

Blind holes: insert pilot diameters

Through holes: button guide diameters

PRINT PARTS

Base x1 / bottom on bed

Lid x1 / exterior face on bed

Button cap x3 / head face on bed

Open IC / OLED apertures; no covers

Case M2 inserts: OD 3.5, length 3.0

Prototype fit required: insert bore, switch travel, socket height and actual module dimensions.