



B05 / SMOOTH BASE

QTY 4 | ALUMINUM 6061-T6 | 18 x 98 x 25 | STEP: B05_smooth_base.step


TOP (+Z)

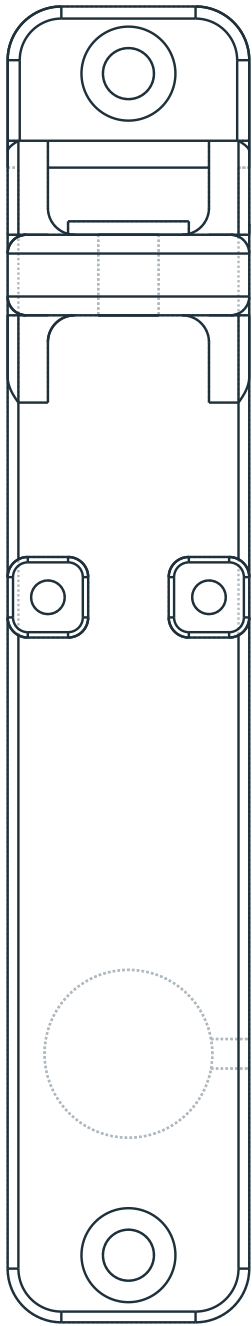

BOTTOM (-Z; mirrored Y on screen)

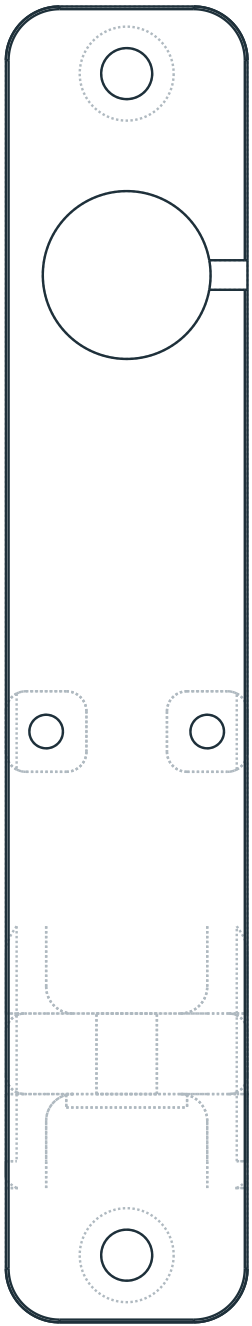

FRONT (-Y)




DATUM	X=width centre; Y=front; Z=bottom
Envelope	W18; L98; max height25
Main plate	Z0..3; plan corners R4
Front mount	X0 / Y5; D3.8 THRU3
Rear mount	X0 / Y93; D3.8 THRU5
Both countersinks	D7 x 90 deg; axial depth1.6
CSK floor left	Front1.4; rear3.4
Clamp threads	2x M3 x 0.5 - 6H THRU6
Clamp coordinates	X +/-6; Y54; tap drill D2.5
Integral clamp pads	6 x 6; Z3..6; plan R1.5; topR0.4
Piezo pocket	Bottom: X0/Y20; D12.5; depth1.5
Wire exit	X0..9; Y18.9..21.1; depth1.2
Wall position	Y75..81; thickness6
Wall slot	X0/Z13; W4.5; totalL16.5 THRU6
Washer recess	X +/-4.5; Y81..82; bottomZ2

Threads are pilot-diameter representations in STEP.
Make M3 threads; do not leave them as plain D2.5 bores.
Hole and thread axis locations: +/-0.05 mm.
D3.8 clearance / slotW4.5: +/-0.05 mm.
Other dimensions: ISO 2768-m; geometry from STEP.
Flatness of body seat: 0.05 mm. Ra3.2 target.


B05 / CURVED RIBS AND MACHINING ACCESS

Top, bottom and end setups. No enclosed undercuts. Formed curves and fillets are defined by STEP.

LEFT (-X)

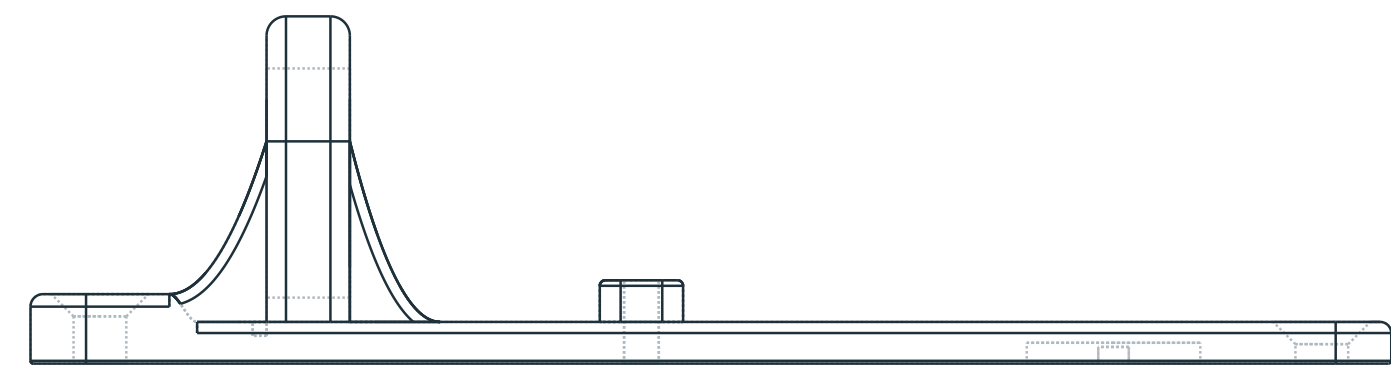


RIGHT (+X)

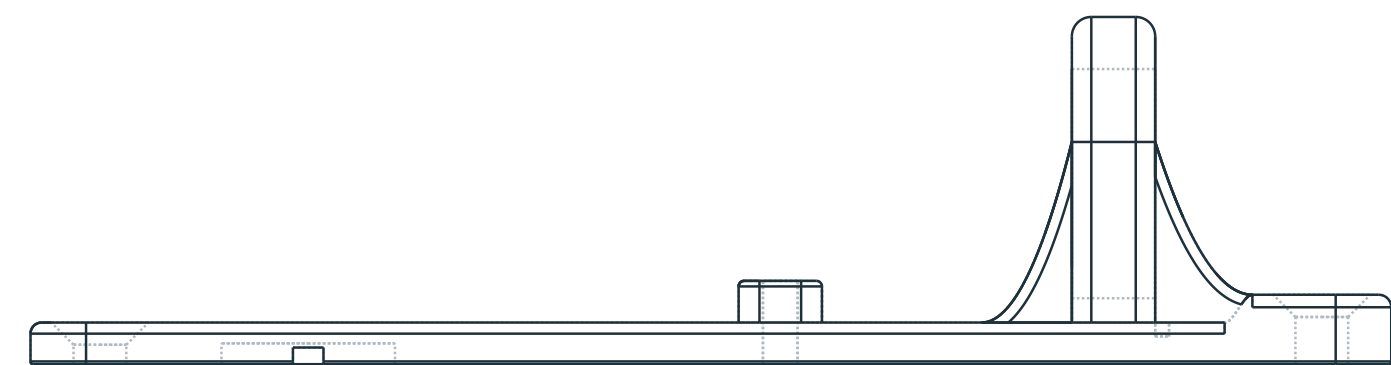

Internal wall/floor roots may be eased R0.2 MAX; preserve spring envelope.
Do not enlarge the slot/recess or remove integral ribs without approval.
Remaining cosmetic edges: C0.2 MAX. Thread mouths and countersink seats: C0.1 MAX.

Wall arch: true R9, centre X0/Z16; apexZ25.
Front and rear wall outside profile edges: R1.4.
Wall/rib vertical inside corners: R2.0.
Outside curved rib rims: R0.8.
ISOMETRIC (illustration; not dimensioned)

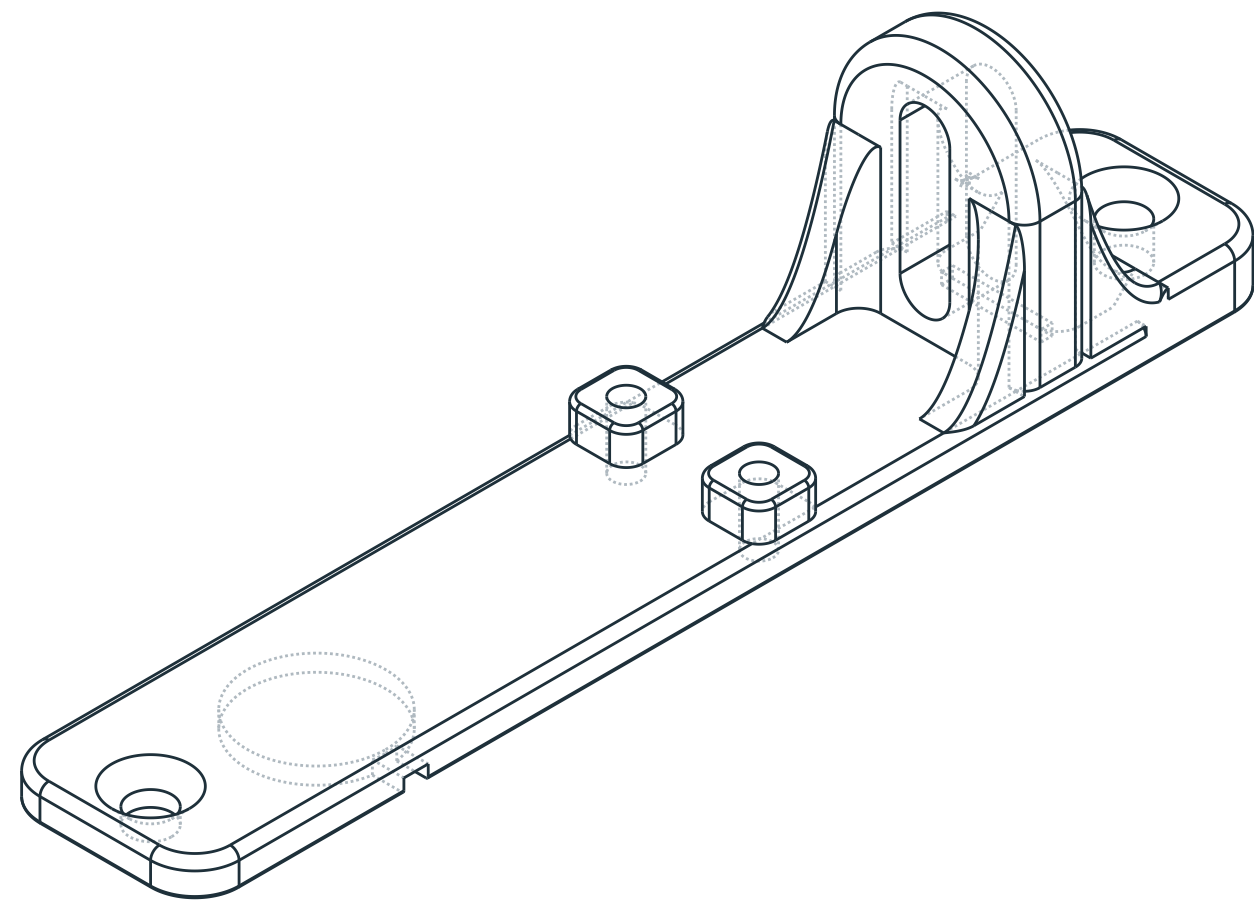

Rear flange: Y88..98, topZ5; outside upper rim R0.9.
Smooth ramp: Y86..88, Z3..5; profile from STEP.
Ribs width3: X[-9,-6] and X[6,9].
Front rib curve: (Y,Z) (68.5,3),(71.75,3),(75,16).
Rear rib curve: (88,5),(84.5,5),(81,16).
Both are quadratic Bezier profiles.
As-machined finish; no polishing of functional seats.
Aluminum threads: gauge M3 x 0.5 - 6H.