



B06 / SMOOTH BASE

QTY 4 | ALUMINUM 6061-T6 | 18 x 86 x 25 | STEP: B06_compact_base.step


TOP (+Z)

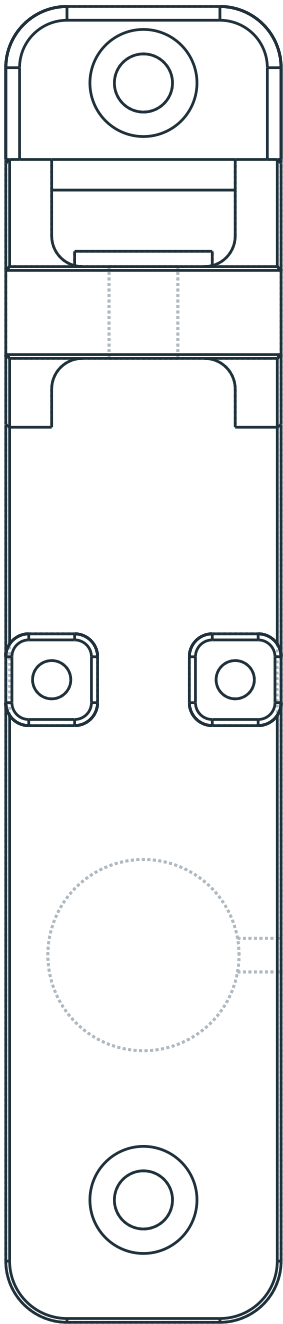

BOTTOM (-Z; mirrored Y on screen)

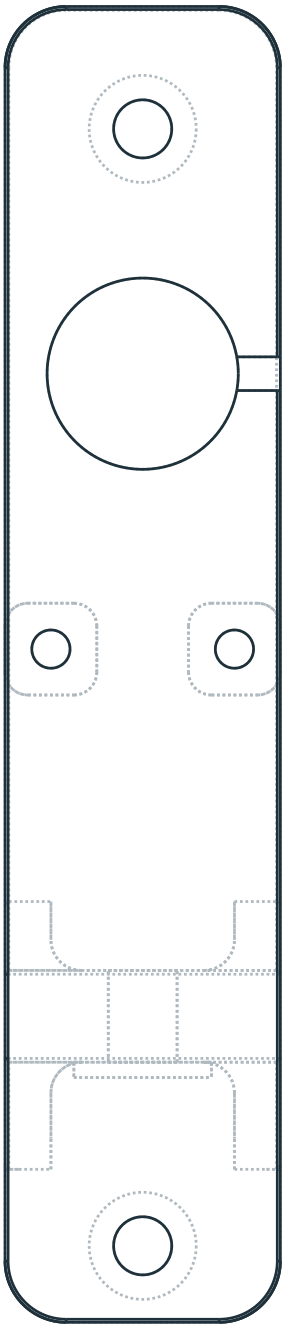

FRONT (-Y)




DATUM	X=width centre; Y=front; Z=bottom
Envelope	W18; L86; max height25
Main plate	Z0..3; planR4; free front upper rimC0.25
Front mount	X0 / Y8; D3.8 THRU3
Rear mount	X0 / Y81; D3.8 THRU5
Both countersinks	D7 x 90 deg; axial depth1.6
CSK floor left	Front1.4; rear3.4
Clamp threads	2x M3 x 0.5 - 6H THRU6
Clamp coordinates	X +/-6; Y42; tap drill D2.5
Integral clamp pads	6 x 6; Z3..6; plan R1.5; topR0.4
Piezo pocket	Bottom: X0/Y24; D12.5; depth1.5
Wire exit	X0..9; Y22.9..25.1; depth1.2
Wall position	Y63..69; thickness6
Wall slot	X0/Z13; W4.5; totalL16.5 THRU6
Washer recess	X +/-4.5; Y69..70; bottomZ2

Threads are pilot-diameter representations in STEP.
Make M3 threads; do not leave them as plain D2.5 bores.
Hole and thread axis locations: +/-0.05 mm.
D3.8 clearance / slotW4.5: +/-0.05 mm.
Other dimensions: ISO 2768-m; geometry from STEP.
Flatness of body seat: 0.05 mm. Ra3.2 target.


B06 / PLAIN WEBS AND MACHINING ACCESS

Top, bottom and end setups. No enclosed undercuts. Straight web faces and specified edge breaks are defined by STEP.

LEFT (-X)

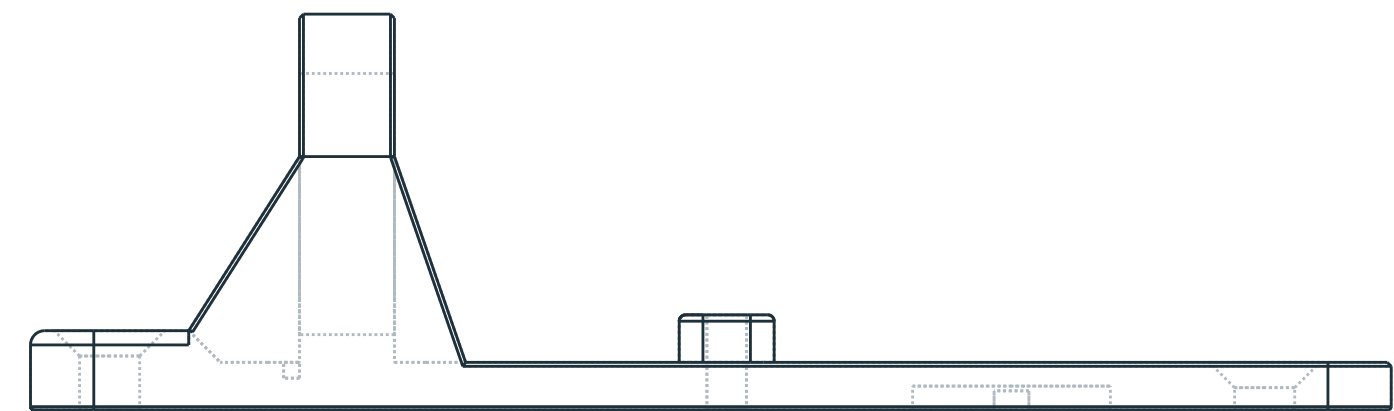


RIGHT (+X)

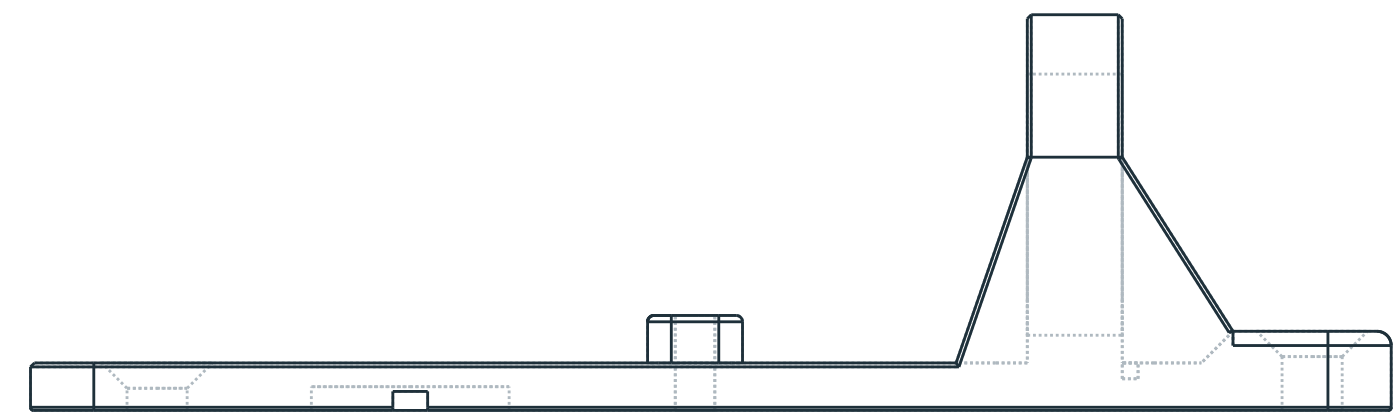

- Internal wall/floor roots may be eased R0.2 MAX; preserve spring envelope.
- Do not enlarge the slot/recess or remove integral ribs without approval.
- Remaining cosmetic edges: C0.2 MAX. Thread mouths and countersink seats: C0.1 MAX.

- Wall arch: true R9, centre X0/Z16; apexZ25.
- Arch rim and exposed web diagonals: C0.25.
- Wall/rib vertical inside corners: R2.0.
- Coplanar web/base side face; no stacked rim fillets.
- ISOMETRIC (illustration; not dimensioned)

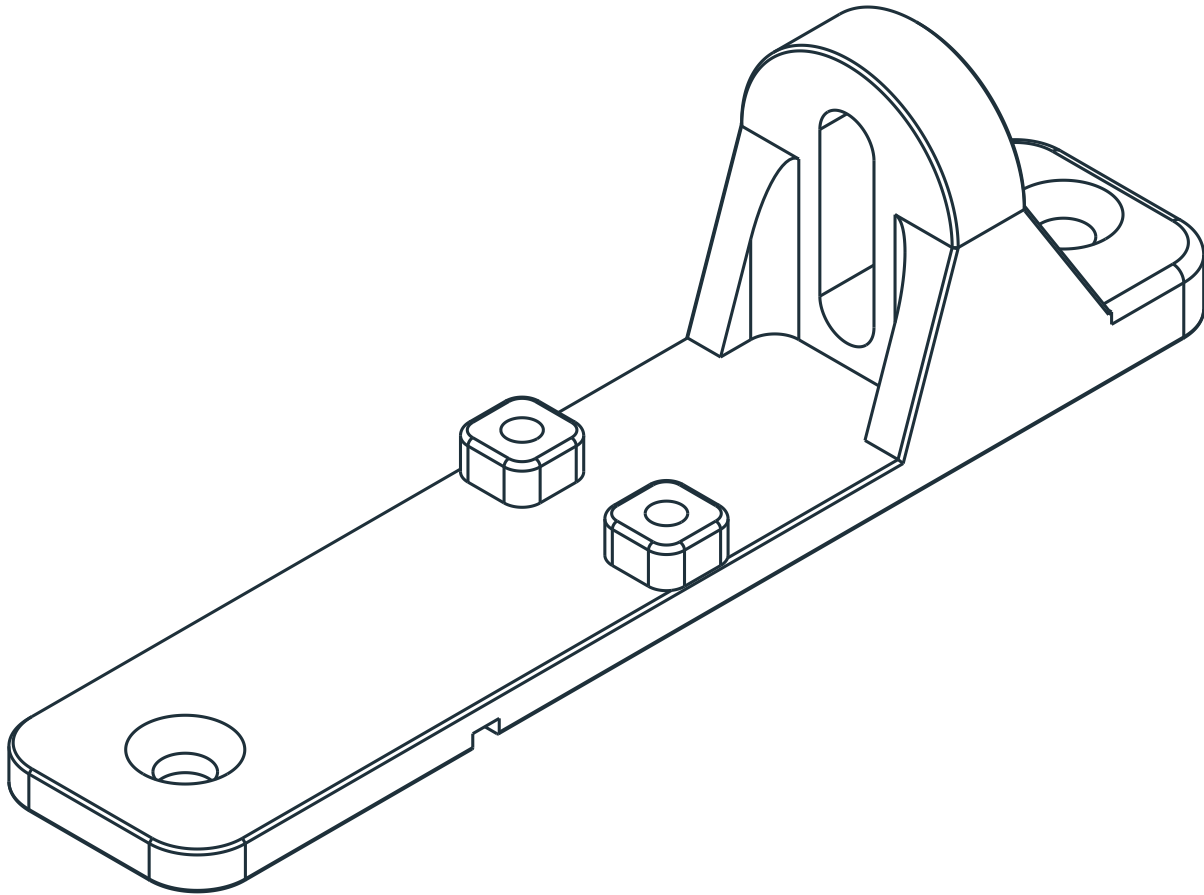

- Rear flange: Y76..86, topZ5; outside upper rim R0.9.
- Smooth ramp: Y74..76, Z3..5; profile from STEP.
- Ribs width3: X[-9,-6] and X[6,9].
- Front web slope: (Y,Z) (58.5,3) to (63,16).
- Rear web slope: (69,16) to (76,5).
- Integral planar webs, 3 mm thick; no under-root rim groove.
- As-machined finish; no polishing of functional seats.
- Aluminum threads: gauge M3 x 0.5 - 6H.