



B10 / STREAMLINED ARCH BASE

QTY 4 | ALUMINUM 6061-T6 | 18 x 86 x 25 | STEP: B10_streamlined_base.step


TOP (+Z)

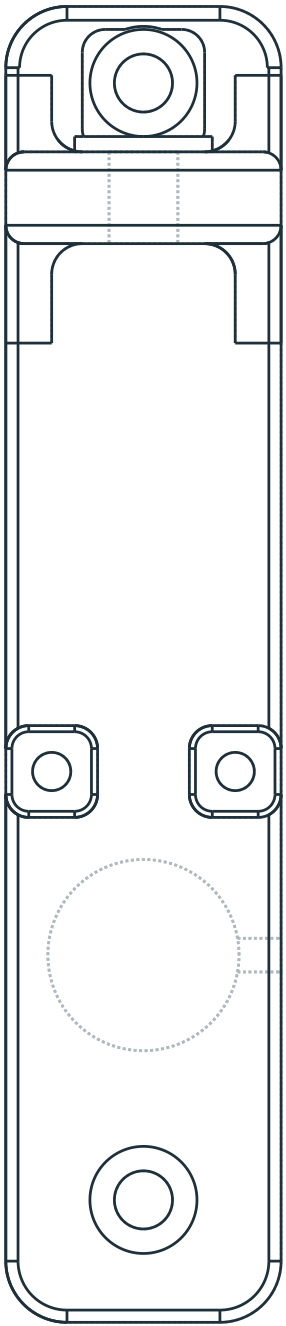

BOTTOM (-Z; mirrored Y on screen)

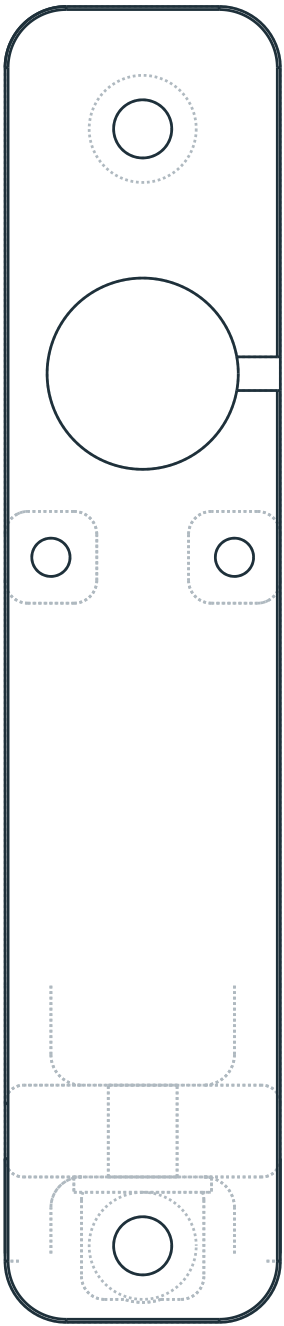

FRONT (-Y)




DATUM	X=width centre; Y=front; Z=bottom
Envelope	W18; L86; max height25
Main plate	Z0..3; planR4; free front upper rimR0.8
Front mount	X0 / Y8; D3.8 THRU3
Rear mount	X0 / Y81; D3.8 THRU3 at recessed seat
Both countersinks	D7 x 90 deg; axial depth1.6
CSK floor left	Front1.4; rear1.4
Rear head recess	D7.4; depth2 fromZ5 toZ3
Rear clearance tray	W8 x L8; centreY80.5; floorZ3; R1.5
Clamp threads	2x M3 x 0.5 - 6H THRU6
Clamp coordinates	X +/-6; Y36; tap drill D2.5
Integral clamp pads	6 x 6; topZ6; rootZ2 into plate; R1.5/topR0.4
Piezo pocket	Bottom: X0/Y24; D12.5; depth1.5
Wire exit	X0..9; Y22.9..25.1; depth1.2
Wall position	Y70.5..76.5; depth6; single R9 arch
Wall slot	X0/Z13; W4.5; totalL16.5 THRU6
Washer recess	X +/-4.5; Y76.5..77.5; floorZ2, open toZ5

Threads are pilot-diameter representations in STEP.
Make M3 threads; do not leave them as plain D2.5 bores.
Hole and thread axis locations: +/-0.05 mm.
D3.8 clearance / slotW4.5: +/-0.05 mm.
Other dimensions: ISO 2768-m; geometry from STEP.
Flatness of body seat: 0.05 mm. Ra3.2 target.


B10 / SINGLE ARCH AND SWEPT WEBS

Top/bottom/end plus 3D finishing setups. STEP governs convex surfaces; protected planar seats must remain flat.

LEFT (-X)

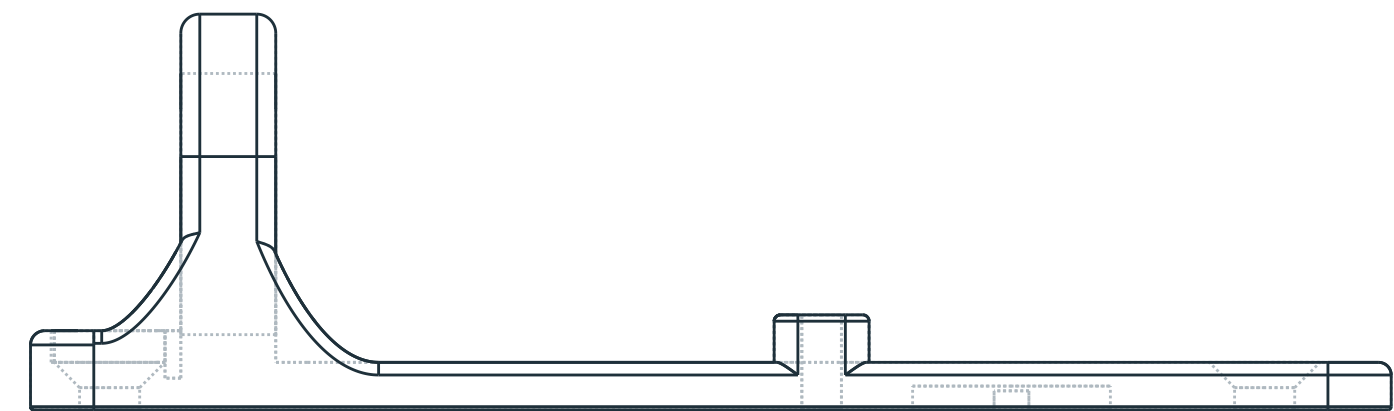


RIGHT (+X)

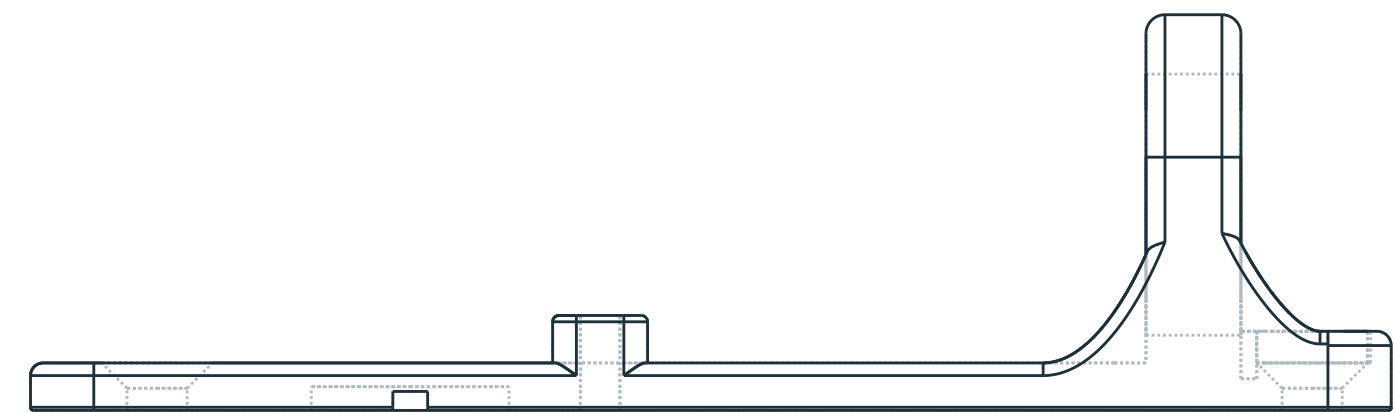

- Internal wall/floor roots may be eased R0.2 MAX; preserve spring envelope.
- Do not enlarge the slot/recess or remove integral ribs without approval.
- Remaining cosmetic edges: C0.2 MAX. Thread mouths and countersink seats: C0.1 MAX.

- One R9 arch centred X0/Z16; apexZ25.
- Wall thickness6; exposed arch rimR1.2.
- No separate raised washer/spring bosses.
- Flat front/rear faces support spring/washer.
- ISOMETRIC (illustration; not dimensioned)

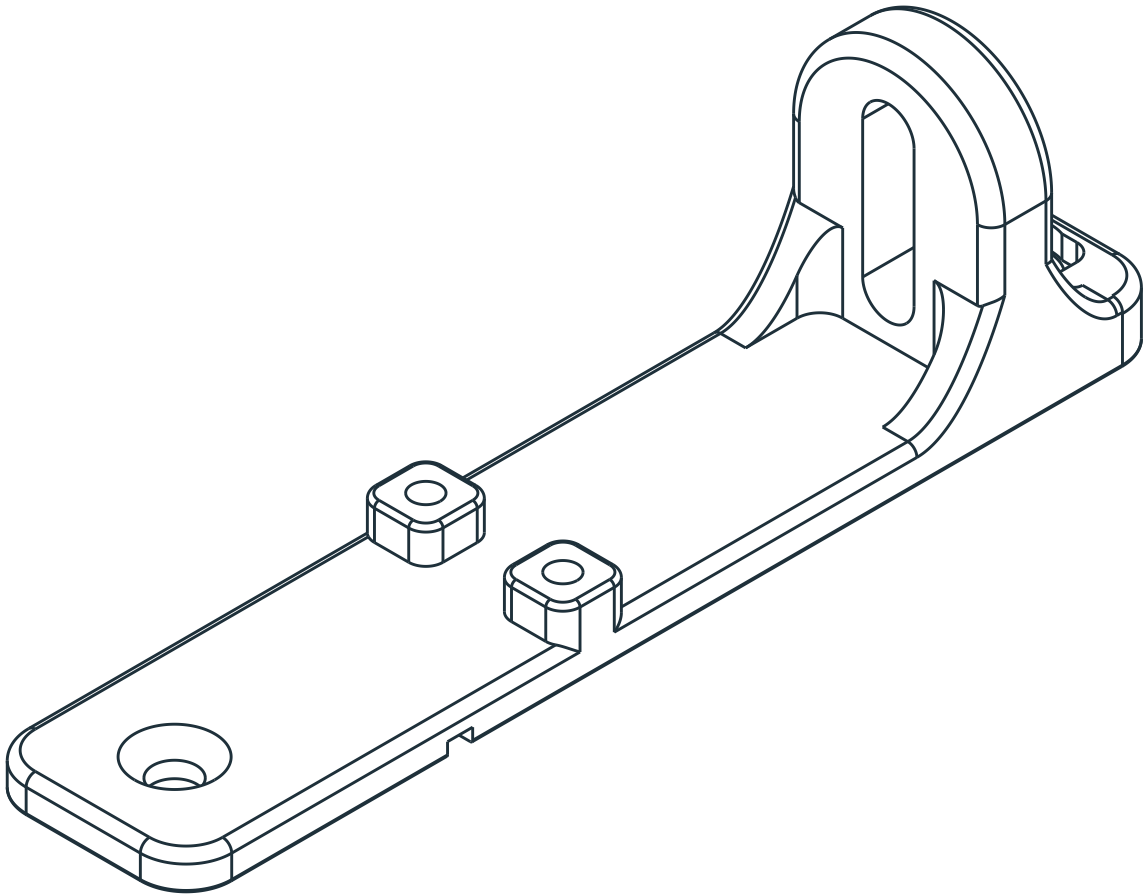

- Rear flange: Y76..86, topZ5; free rear end/corners R0.9.
- Smooth ramp: Y74..76, Z3..5; profile from STEP.
- Ribs width3: X[-9,-6] and X[6,9].
- Front swept web: Y64/Z3 to Y72.5/Z16; tip2 into wall.
- Rear swept web: Y74.5/Z16 to Y81.5/Z5; tip2 into wall.
- Web rootsR2; outerR0.8; innerC0.2 MAX.
- Cubic profiles/ramp from STEP; do not replace by triangles.
- Aluminum threads: gauge M3 x 0.5 - 6H.