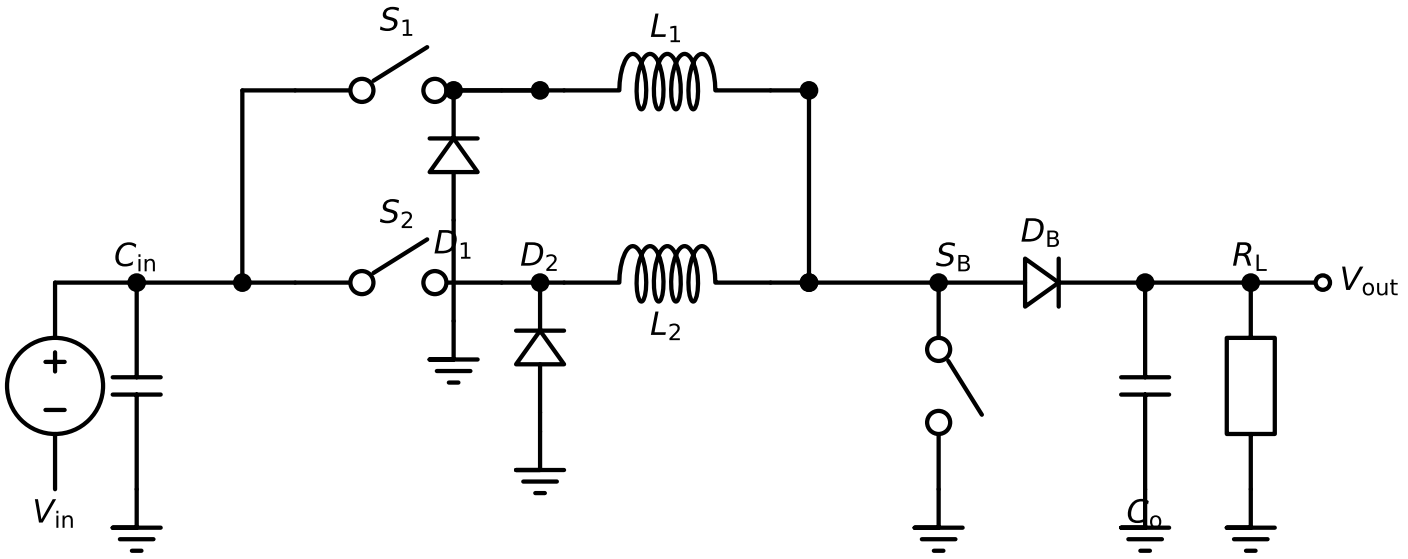

Phase shedding: gate-off S_2 at light load (S_1 remains active). Example rails: 48 V→12/24 V.