

ESP32-WROOM-32 <-> EPSON LX-810L - Interface paralela Centronics (IEEE-1284) / ESC-P


BARRAMENTO DE DADOS D0..D7 (Dn' = Dn em nivel 5 V, saida do TXS0108E)




NOTAS

- +5V do pino 5V/VIN do DevKit (via USB) alimenta o VCCB do TXS0108E e os pull-ups. +3V3 -> VCCA.
- GND comum: ESP32 + TXS0108E + base dos divisores + DB25 pinos 18-25 + impressora (pelo cabo).
- TXS0108E so nos 8 bits D0..D7. Se sair lixo na impressao, trocar por 74HCT541 / 74HCT245.
- /STROBE e /INIT: 3,3V e nivel TTL-alto valido, por isso vao direto ao DB25 (com pull-up 10k).
- OE do TXS0108E: pull-down 10k p/ GND (alta-Z ate o firmware chamar printer.begin()).
- DB25 fixos: pino 14 (/AUTOFEED) -> +5V ; pino 17 (/SELECT-IN) -> GND.
- Dn' = Dn em nivel 5V (lado B do TXS0108E).

DIVISORES DE STATUS - 5 V -> ~3,2 V (o ESP32 nao e 5 V-tolerante)

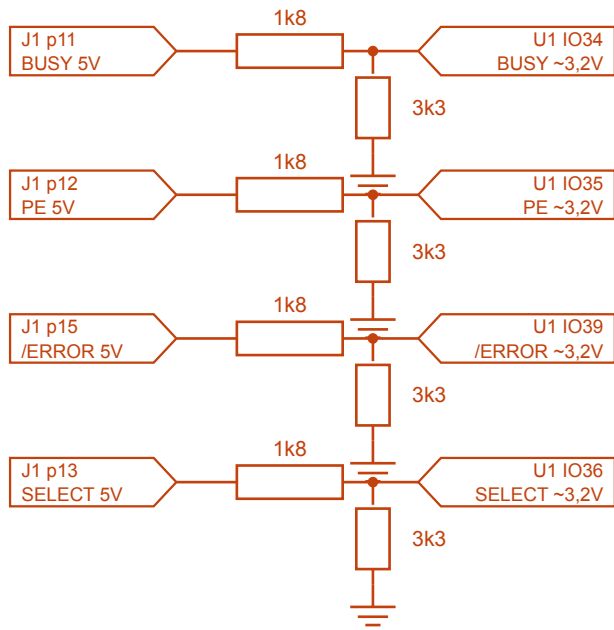

PULL-UPS - /STROBE e /INIT: 3V3 direto no DB25 + 10k para +5V

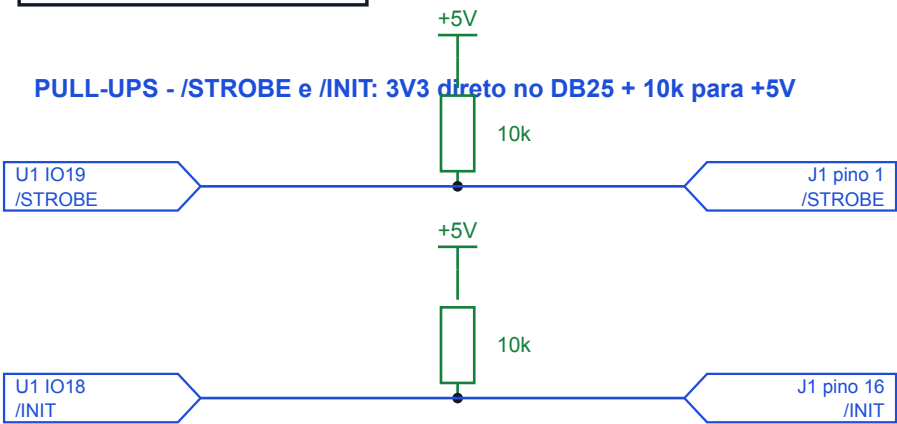

Escala: S/ ESC.	Rev: A
Projeto: Esp32_EPSON	Folha: 1 / 1
Autor: Allan Siriani	Data: 2026-08-29
ESP32-WROOM-32 <-> EPSON LX-810L Interface paralela Centronics / ESC-P	