


ESP32-WROOM-32 <-> EPSON LX-810L - Centronics parallel interface (IEEE-1284) / ESC-P


DATA BUS D0..D7 (Dn' = Dn at 5 V level, TXS0108E output)

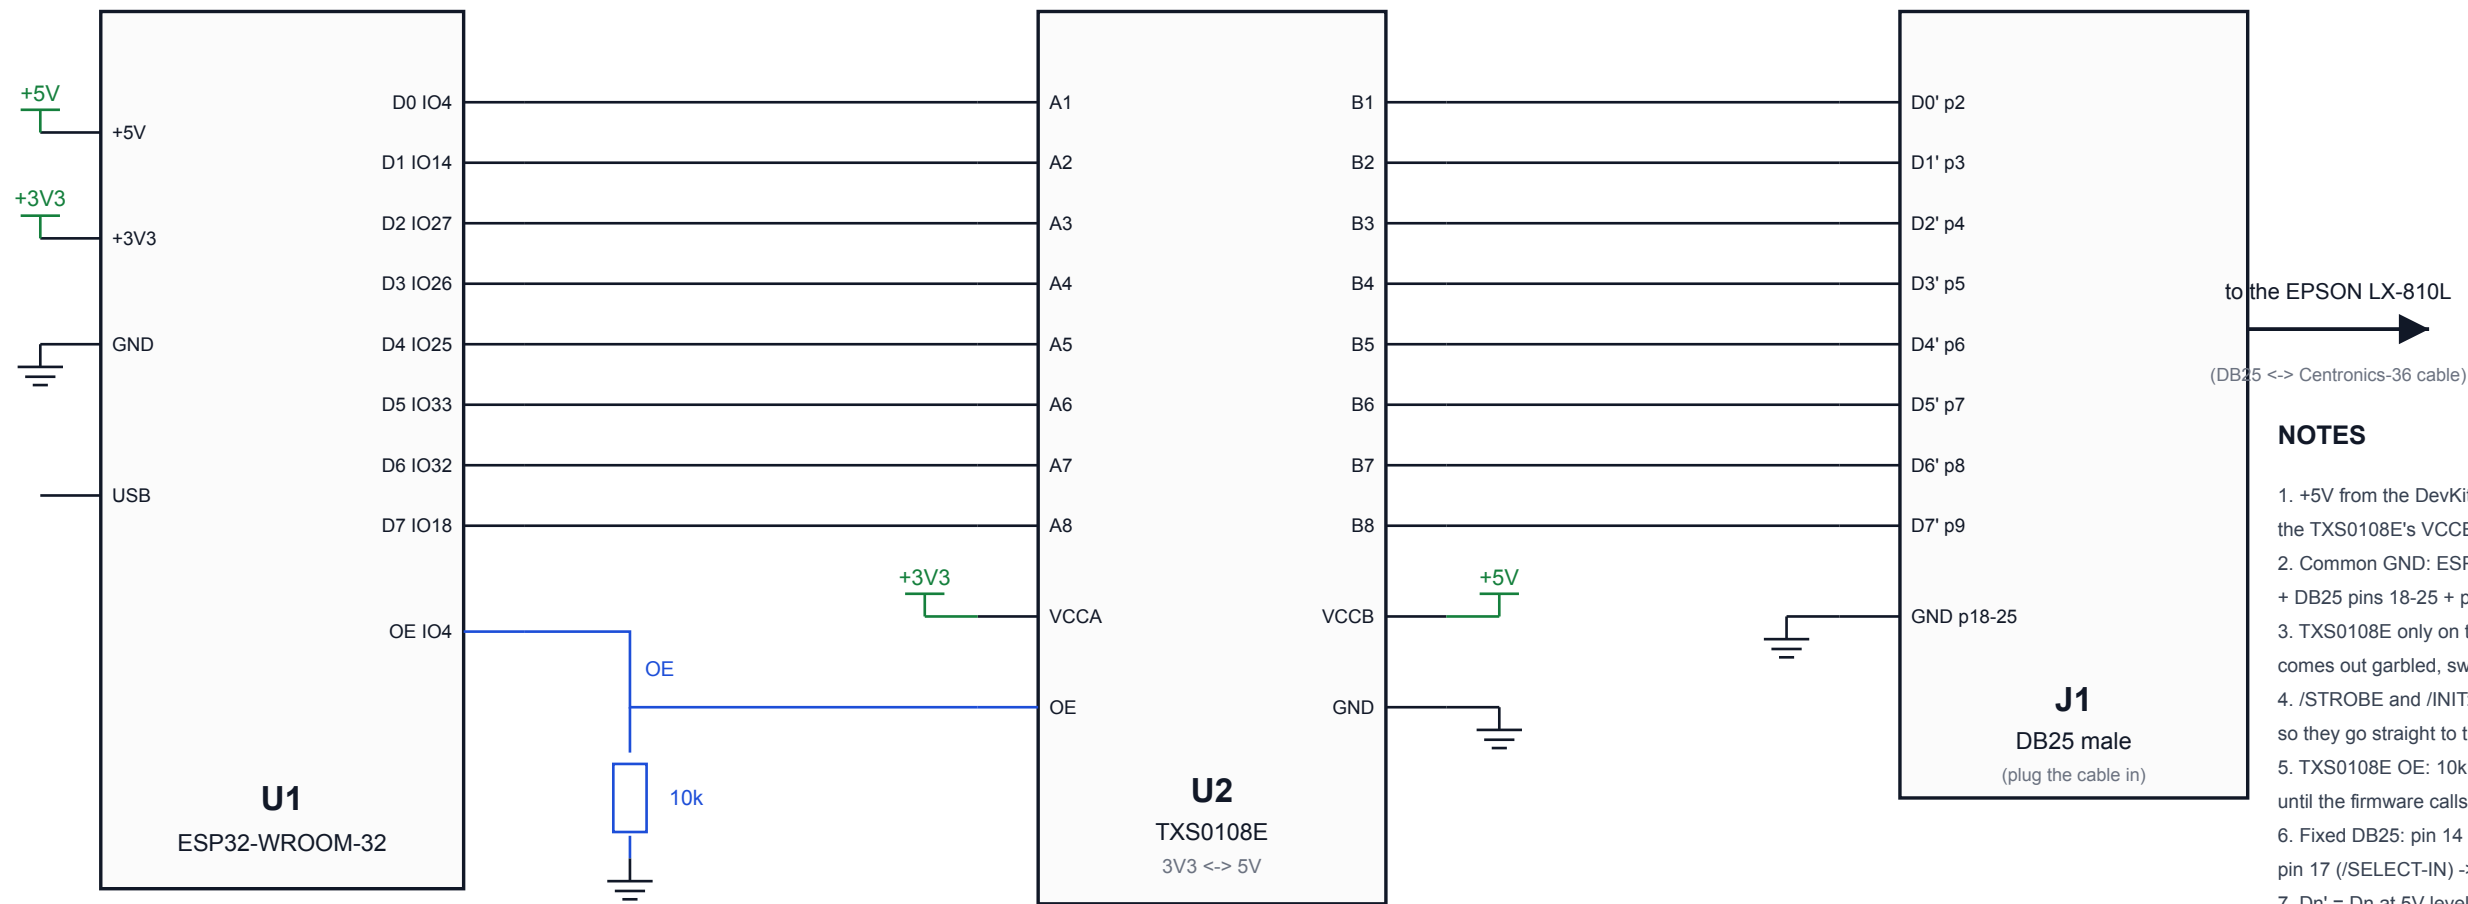


NOTES

1. +5V from the DevKit's 5V/VIN pin (via USB) powers the TXS0108E's VCCB and the pull-ups. +3V3 -> VCCA.
2. Common GND: ESP32 + TXS0108E + divider bases + DB25 pins 18-25 + printer (through the cable).
3. TXS0108E only on the 8 bits D0..D7. If the print comes out garbled, swap for a 74HCT541 / 74HCT245.
4. /STROBE and /INIT: 3.3V is a valid TTL-high level, so they go straight to the DB25 (with a 10k pull-up).
5. TXS0108E OE: 10k pull-down to GND (high-Z until the firmware calls printer.begin()).
6. Fixed DB25: pin 14 (/AUTOFEED) -> +5V ; pin 17 (/SELECT-IN) -> GND.
7. Dn' = Dn at 5V level (TXS0108E B side).

STATUS DIVIDERS - 5 V -> ~3.2 V (the ESP32 is not 5 V tolerant)

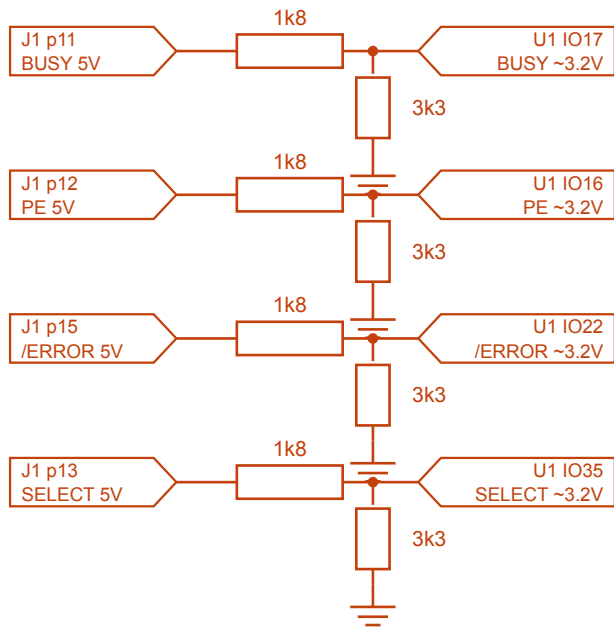

PULL-UPS - /STROBE and /INIT: 3V3 straight to the DB25 + 10k to +5V

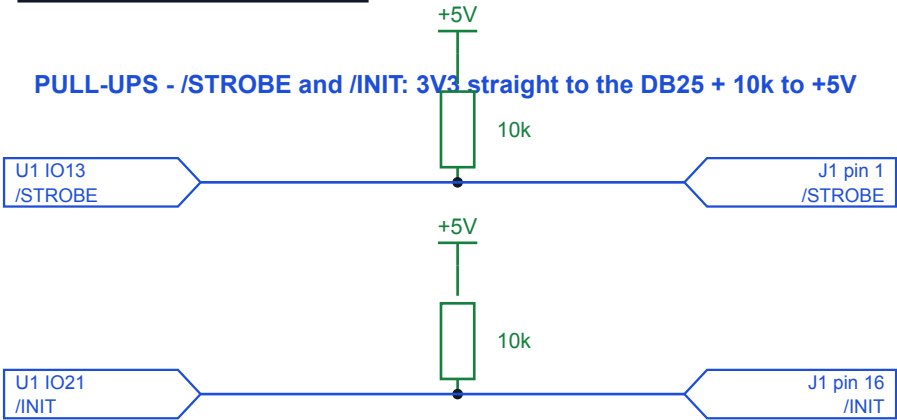

Scale: N/A	Rev: A
Project: relay-printer-bridge	Sheet: 1 / 1
Author: siriani	Date: 2026-08-29
ESP32-WROOM-32 <-> EPSON LX-810L Centronics parallel interface / ESC-P	