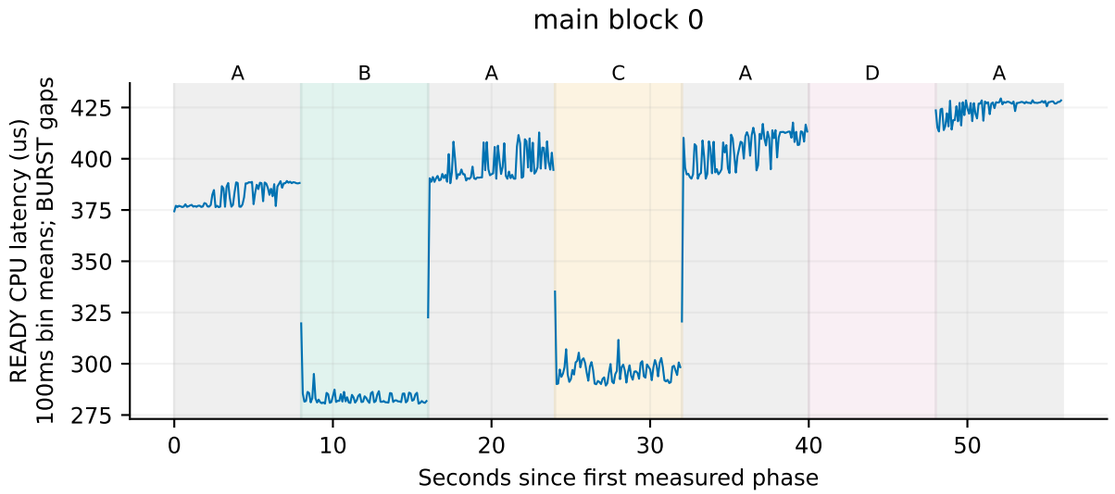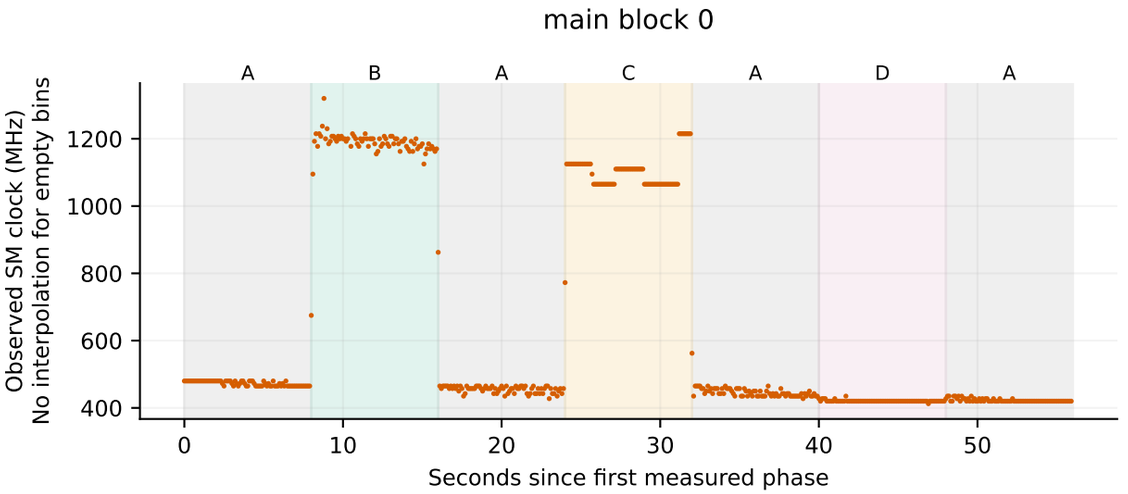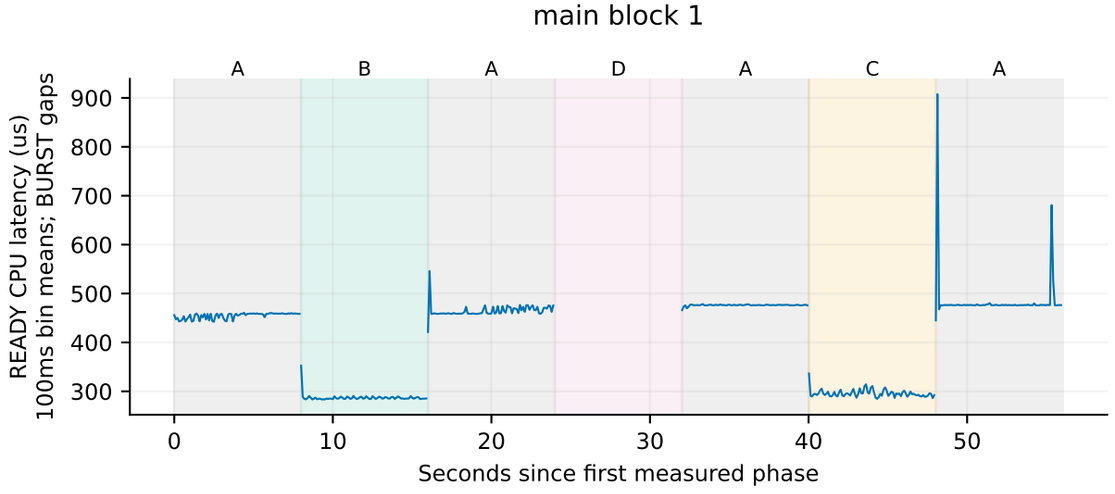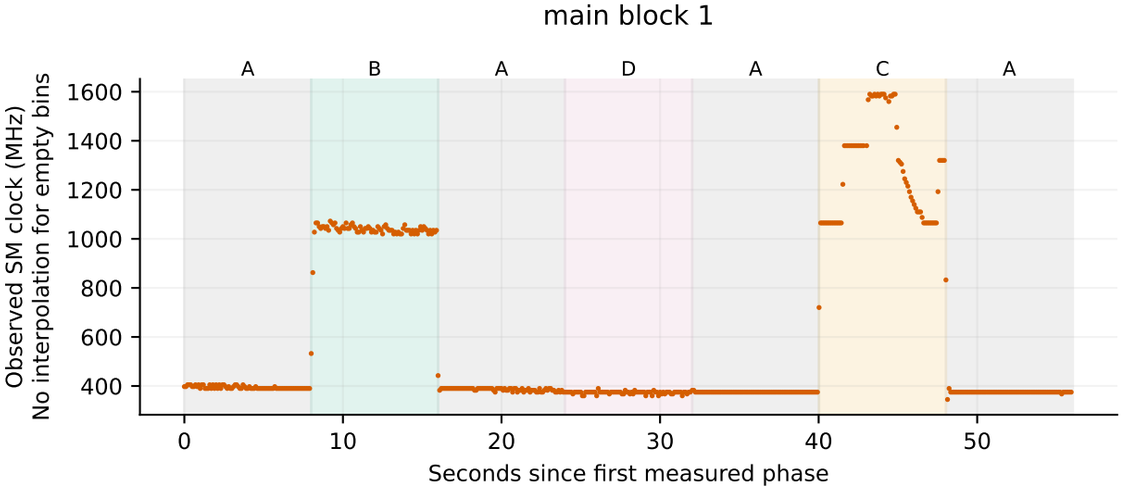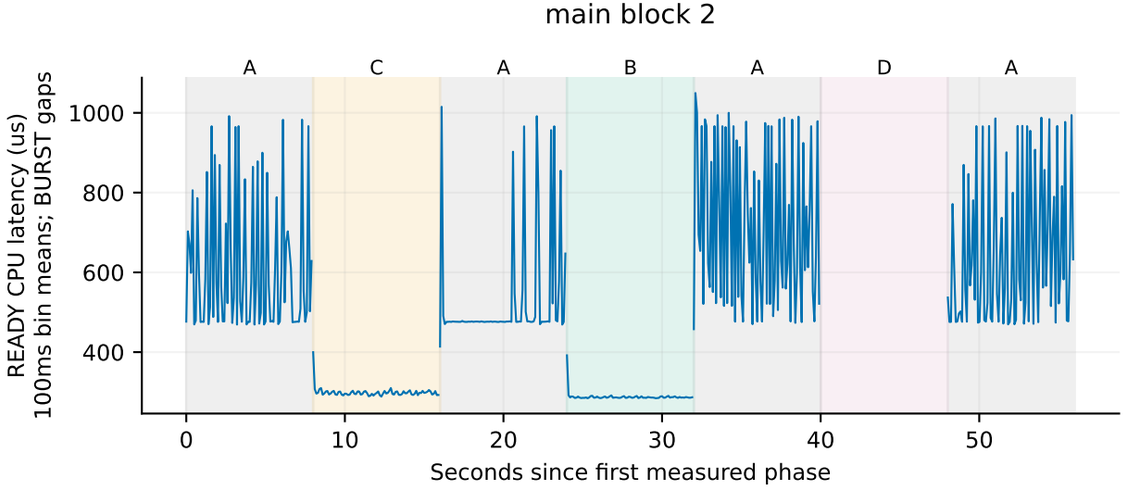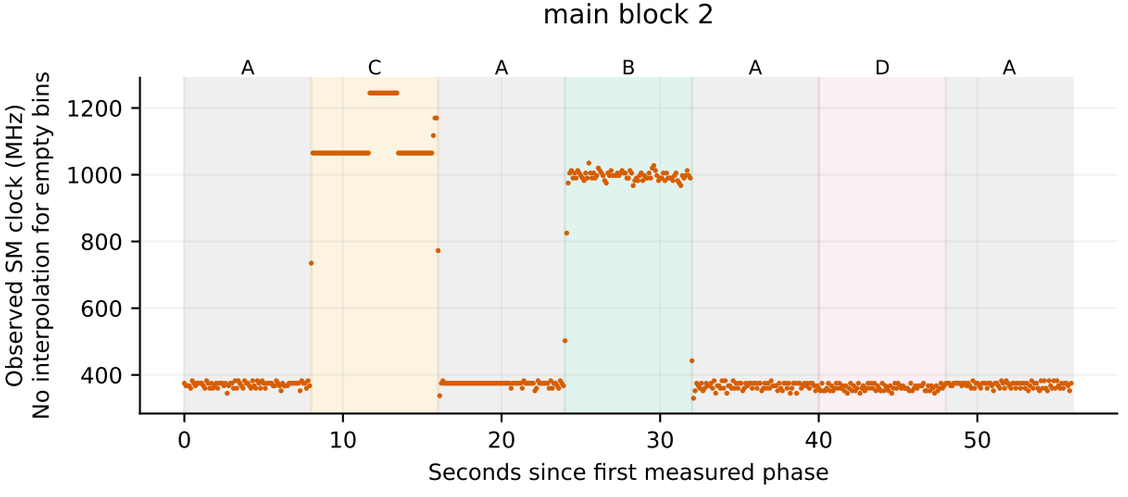A=READY0; B=+100us idle; C=+1000us idle; D=64-enqueue packet