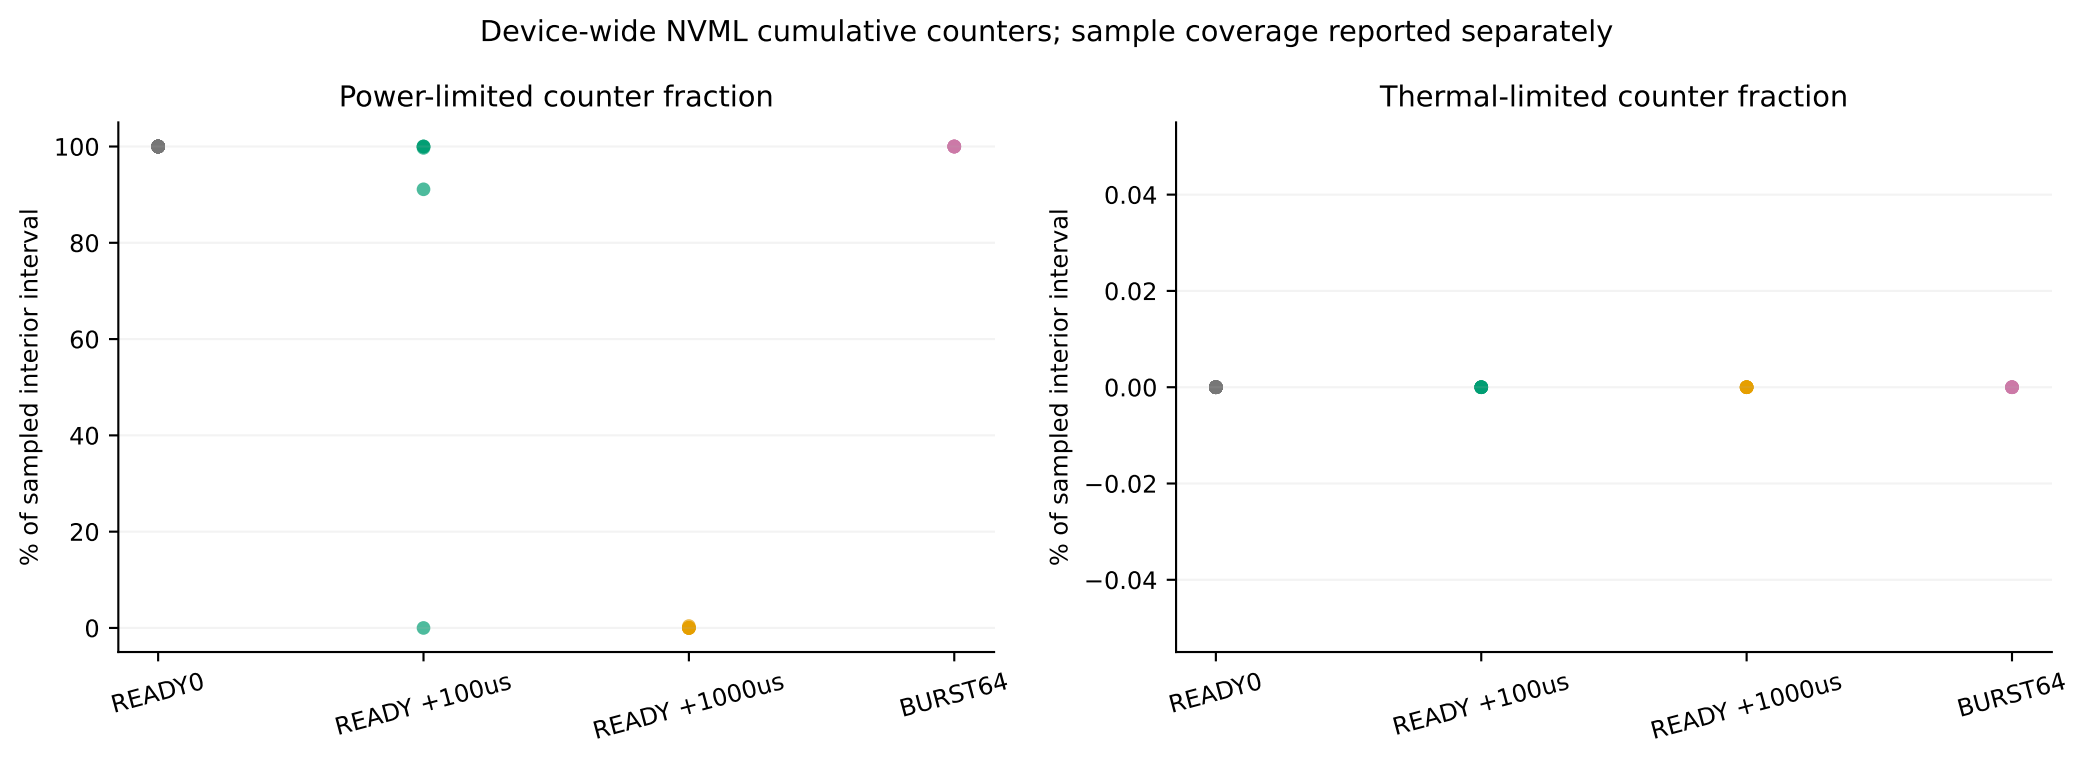
Device-wide NVML cumulative counters; sample coverage reported separately
Power-limited counter fraction
% of sampled interior interval
100
80
60
40
20
0
READY0
READY +100us
READY +1000us
BURST64
Thermal-limited counter fraction
% of sampled interior interval
0.04
0.02
0.00
−0.02
−0.04
READY0
READY +100us
READY +1000us
BURST64