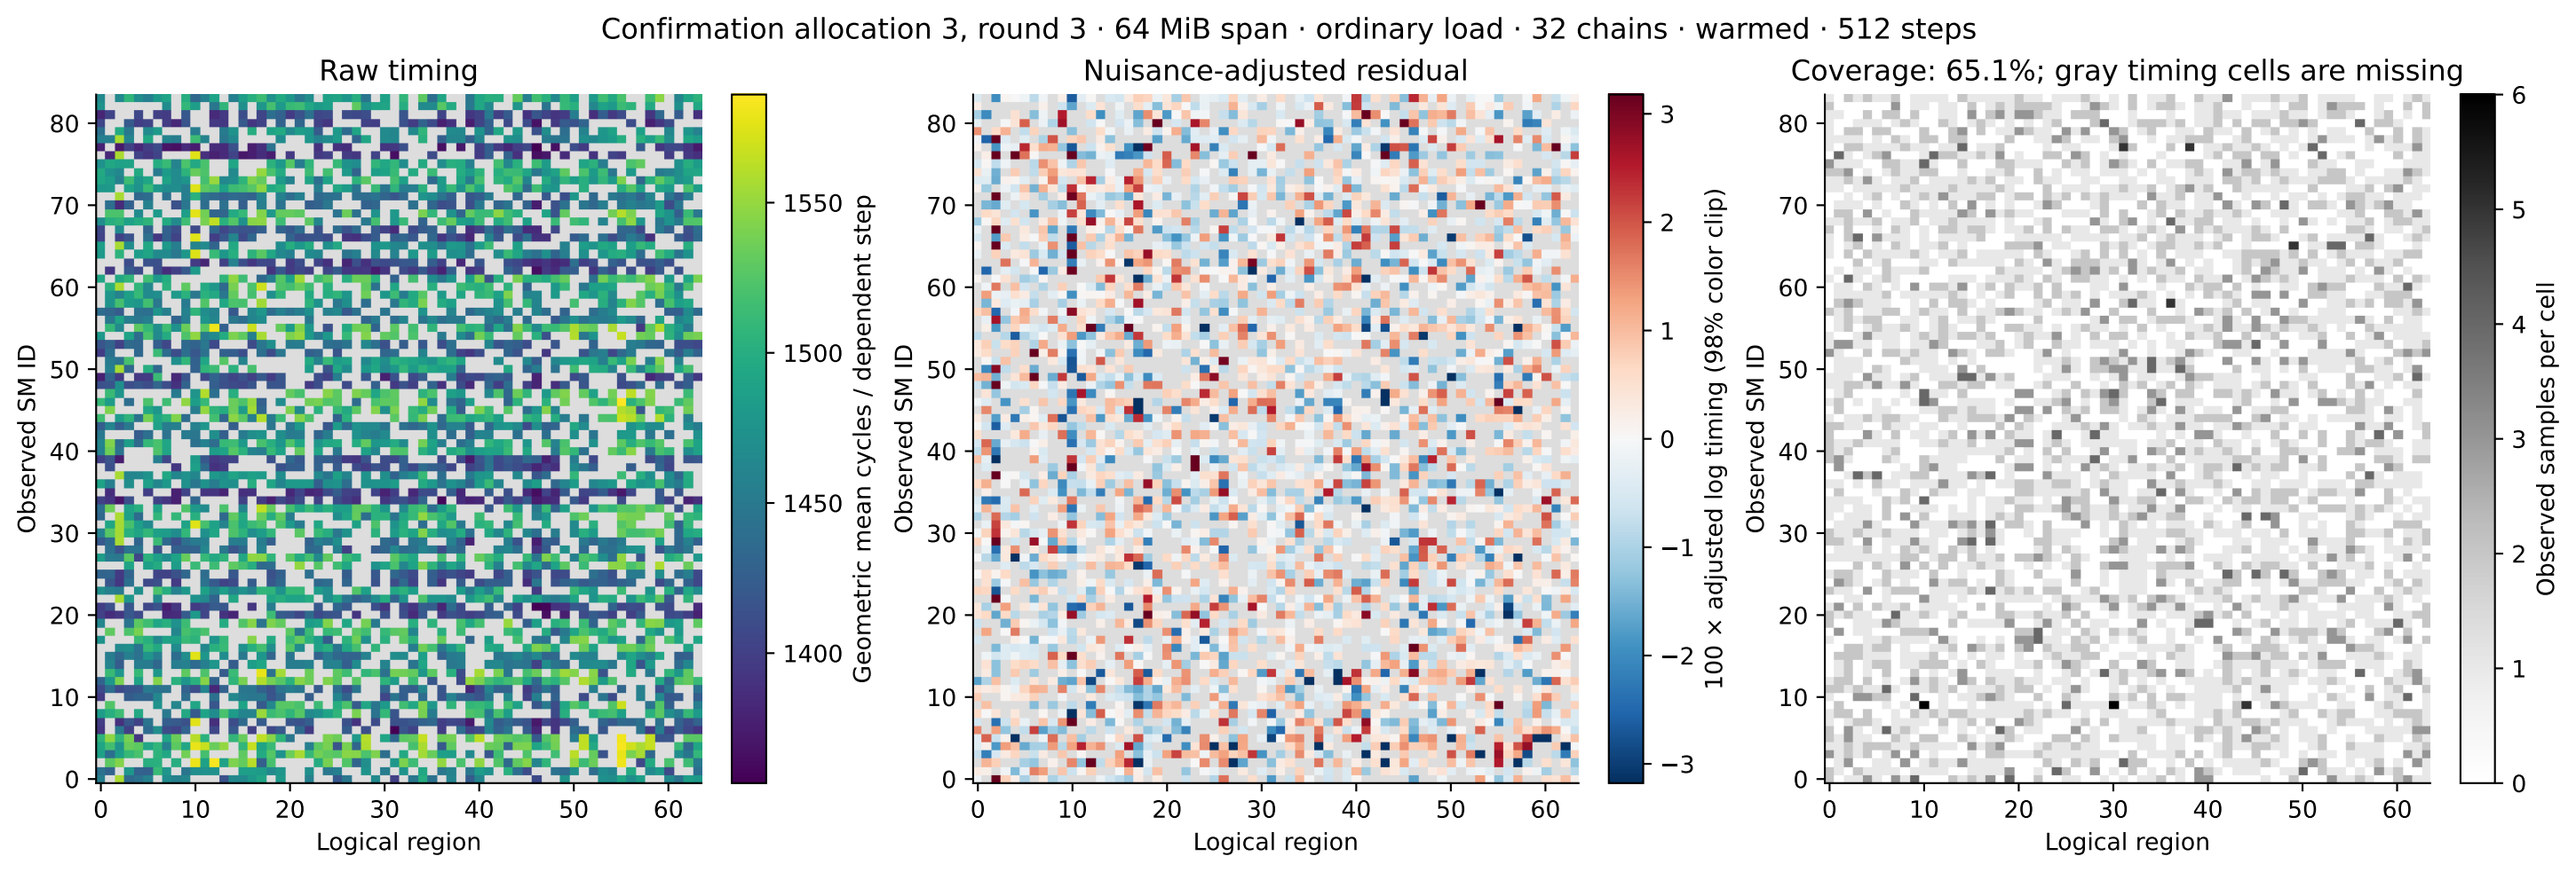

Confirmation allocation 3, round 3 · 64 MiB span · ordinary load · 32 chains · warmed · 512 steps
Raw timing
Observed SM ID
Logical region
Geometric mean cycles / dependent step
1400
1450
1500
1550
Nuisance-adjusted residual
Observed SM ID
Logical region
100 × adjusted log timing (98% color clip)
−3
−2
−1
0
1
2
3
Coverage: 65.1%; gray timing cells are missing
Observed SM ID
Logical region
Observed samples per cell
0
1
2
3
4
5
6