

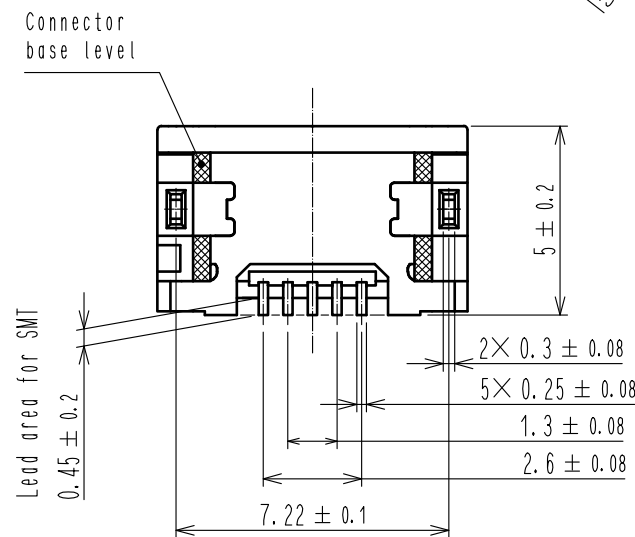
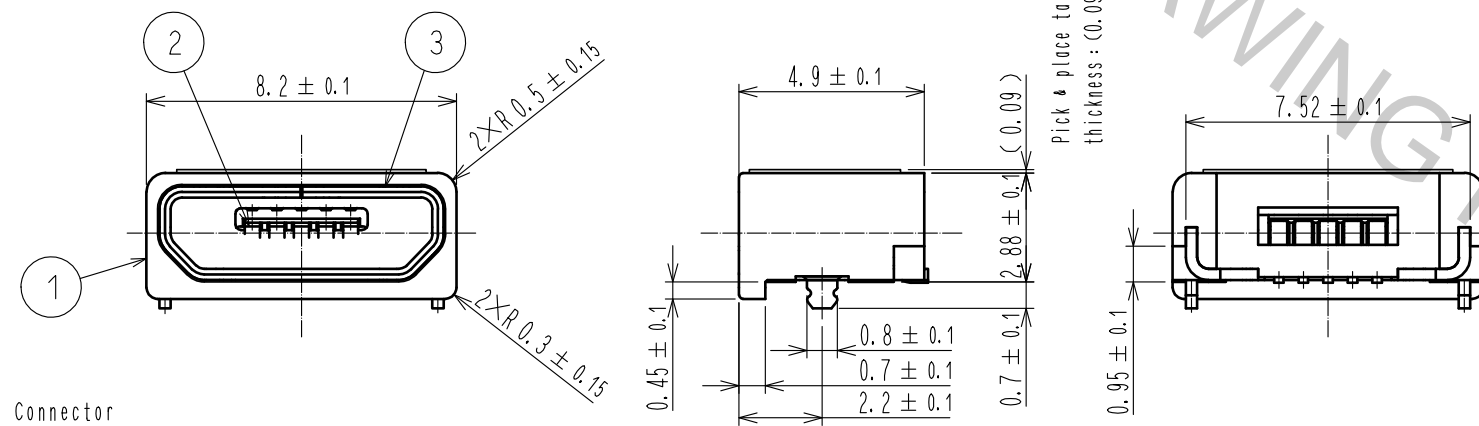
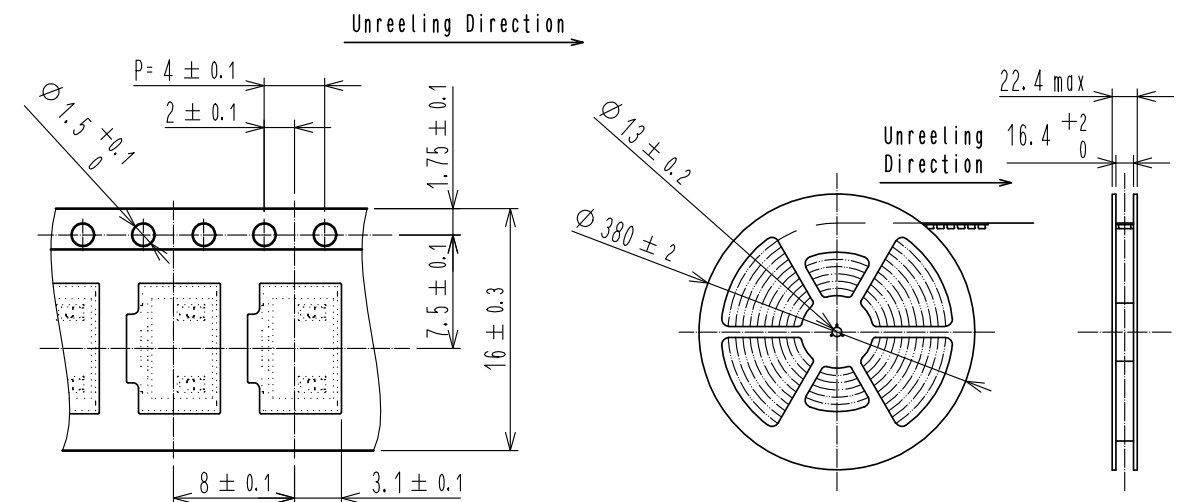


Drawing for packing (FREE)

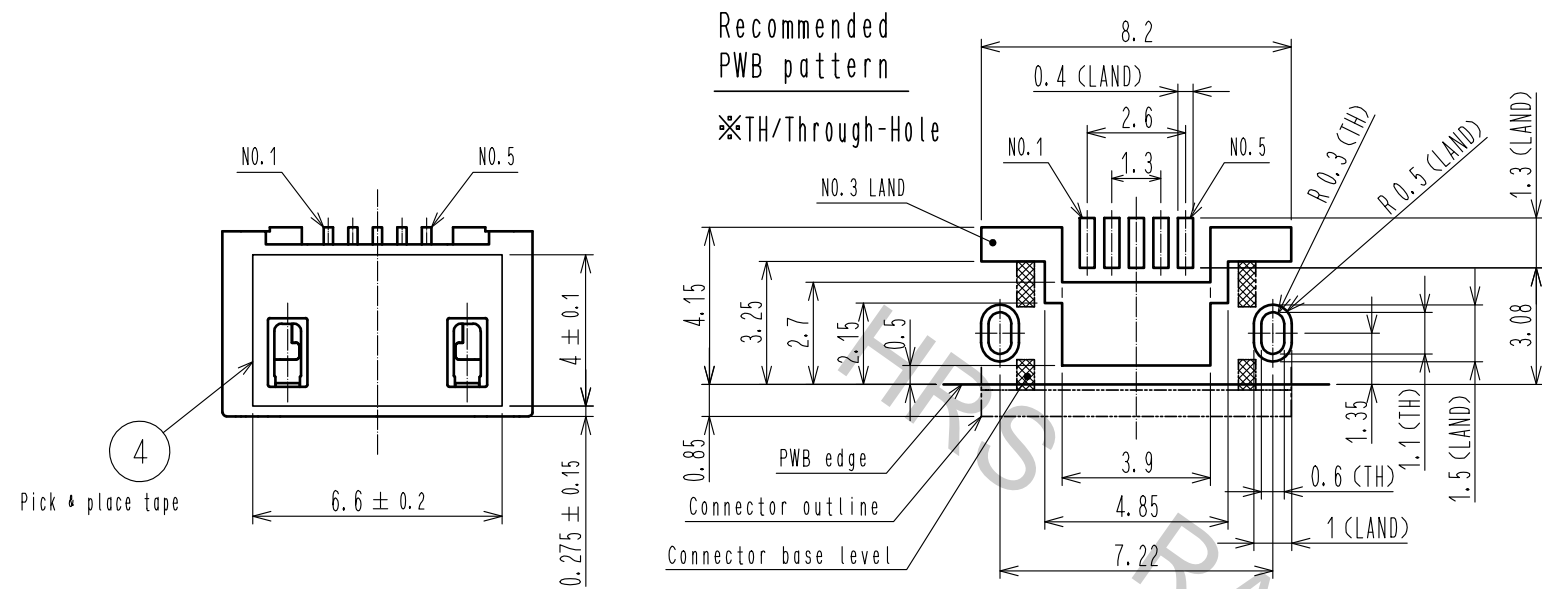

Section of mated condition

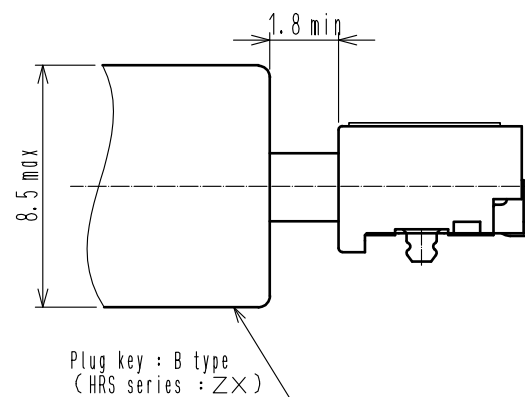

- Remark) 1. Co-planarity is within 0.08mm
2. Plating
Contact area: Palladium -Nickel 0.75um MIN + Gold 0.05um MIN
Lead area: Gold 0.05um MIN
Under plating: Nickel 2um MIN
3. Opening area shape: Conform to USB2.0 standard
4. Per reel: 3000 pcs

3	Stainless-Steel	Gold 0.01μm min (Selective mating and soldering area) Lubricant	6	PE	Top cover tape
2	Copper-Alloy	2	5	PS	Embossed carrier tape
1	LCP	Black UL94V-0	4	PI	Pick & place tape
NO.	MATERIAL	FINISH, REMARKS	NO.	MATERIAL	FINISH, REMARKS
UNITS mm	⊙	SCALE 5 : 1	COUNT 1	DESCRIPTION OF REVISIONS DIS-E-00000909	DESIGNED TY. MIURA
APPROVED : RI. TAKAYASU	11.06.20	CHECKED : TA. ASO	11.06.20	DESIGNED : WR. YAMADA	11.06.20
DESIGNED : WR. YAMADA	11.06.20	DRAWN : WR. YAMADA	11.06.20	DRAWING NO. EDC3-126992-02	
HIROSE ELECTRIC CO., LTD.				PART NO. ZX62WD1-B-5PC	
				CODE NO. CL242-0121-3-00	
					1/1