

Q#1

T P A

0 0 0

0 0 1

0 1 0

0 1 1

1 0 0

1 0 1

1 1 0

1 1 1

0

1

0

1

0

1

1

1


$T'P'A$

$T'PA$

$TP'A$

TPA'

TPA

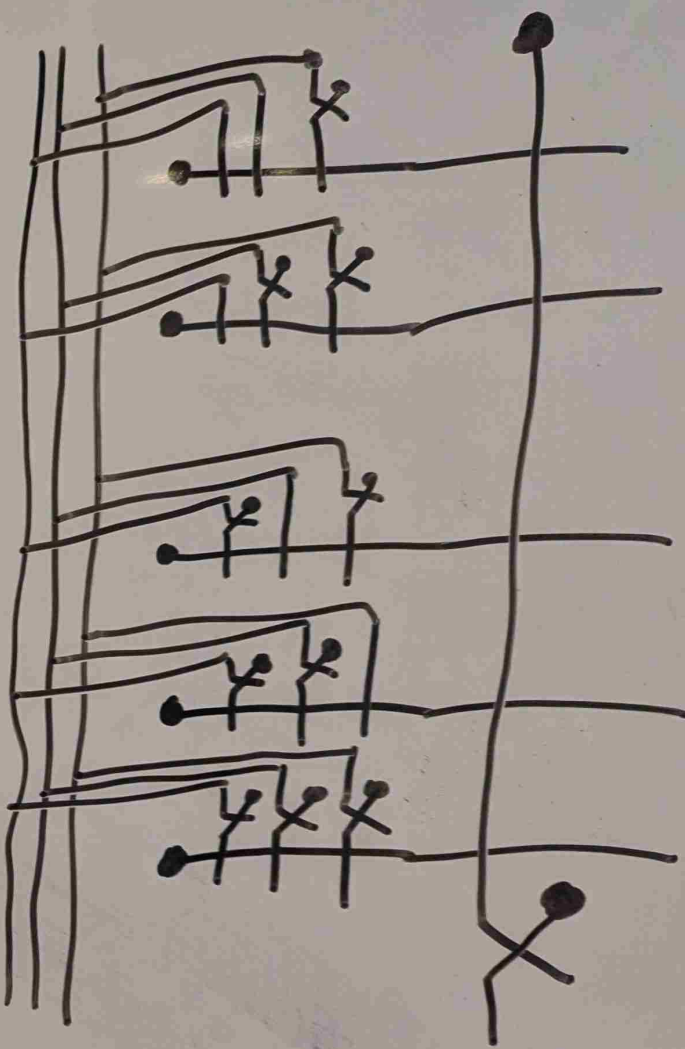

$$F = T'P'A + T'PA + TP'A + TPA' + TPA$$

Q#1

T	P	A	
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


T'P'A

T'PA

TP'A

TPA'

TPA

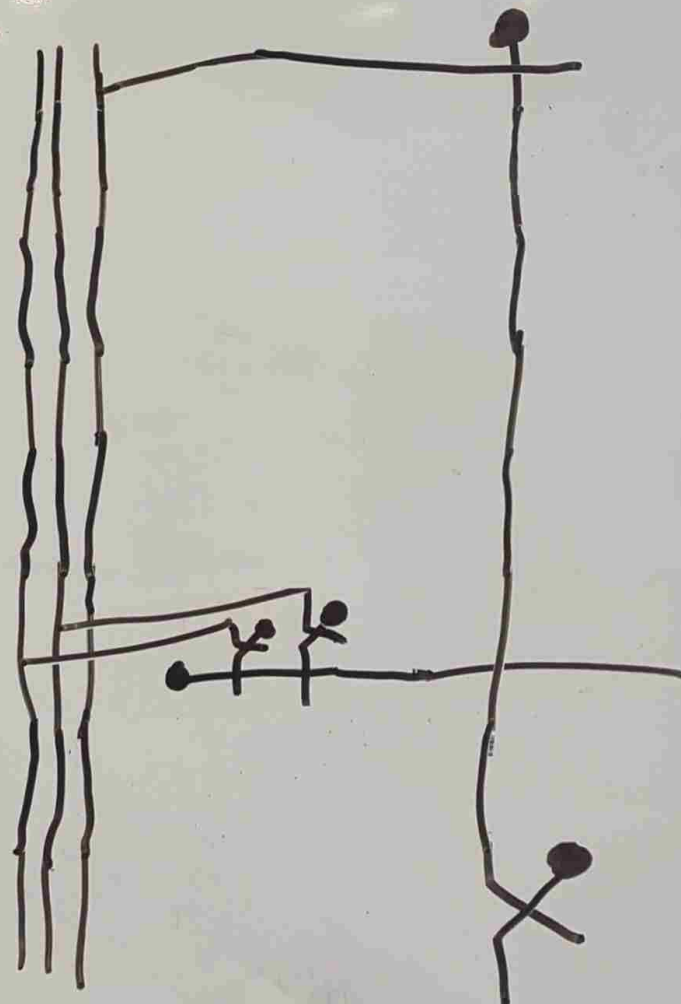

$$F = TP + A$$

Q#2 FBW

0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


F'B'W

F'BW

FB'W

FBW'

FBW

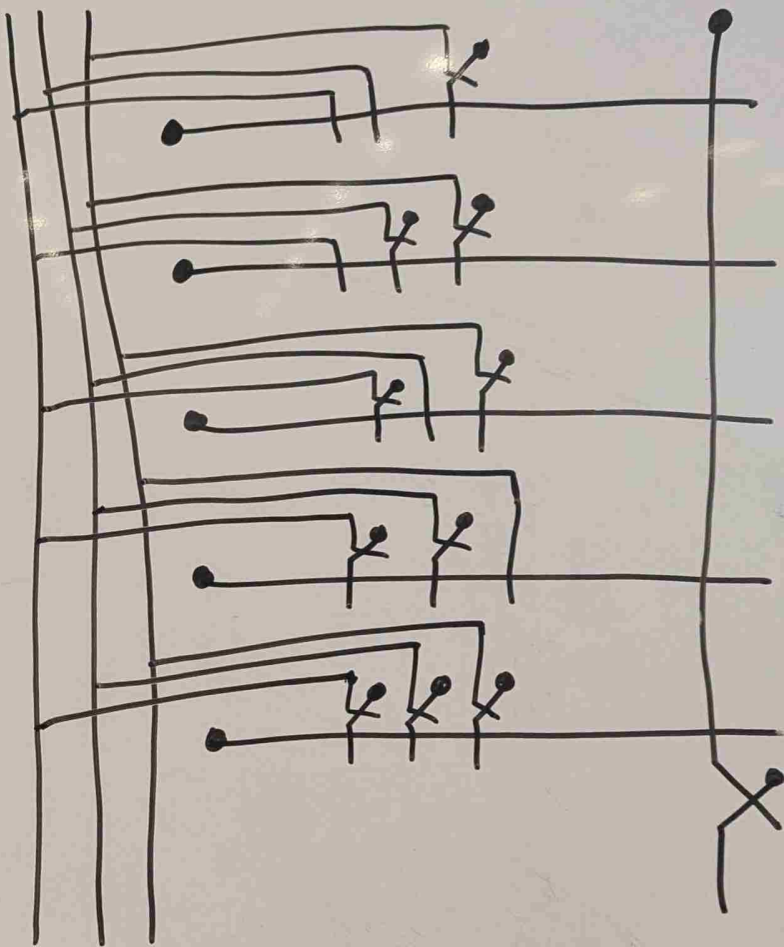

$$F = F'B'W + F'BW + FB'W + FBW' + FBW$$

Q#2 FBW

0 0 0 0

0 0 1 1

0 1 0 0

0 1 1 1

1 0 0 0

1 0 1 1

1 1 0 1

1 1 1 1


F'B'W

F'BW

FB'W

FBW'

FBW

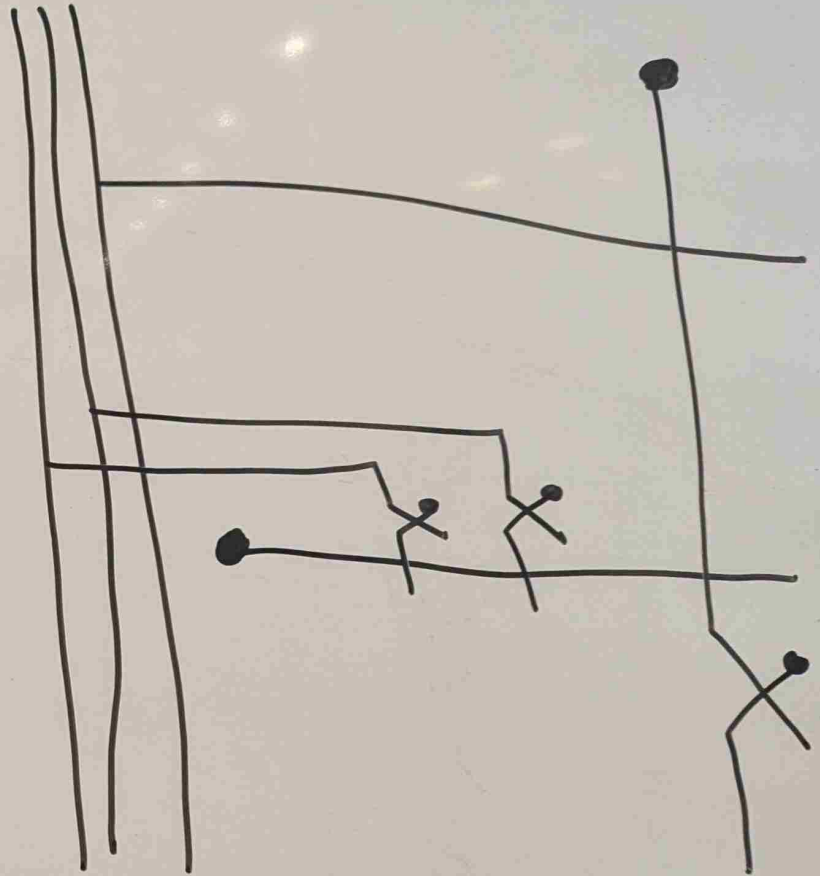

$$F = FB + W$$


Q#3

S	R	M	
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	0
1	1	0	1
1	1	1	1

$SR'M'$

SRM'

SRM

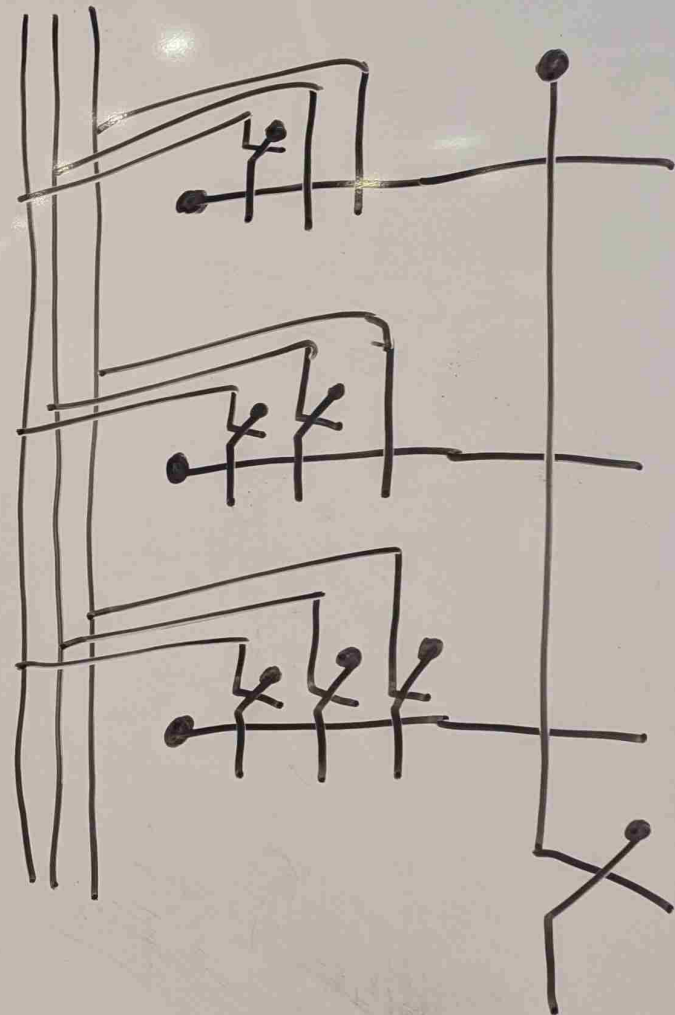

$$F = SR'M' + SRM' + SRM$$

Q#3


S	R	M	
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	0
1	0	0	1
1	0	1	0
1	1	0	1
1	1	1	1

$SR'M'$

SRM'

SRM

$$F = SM' + SR$$

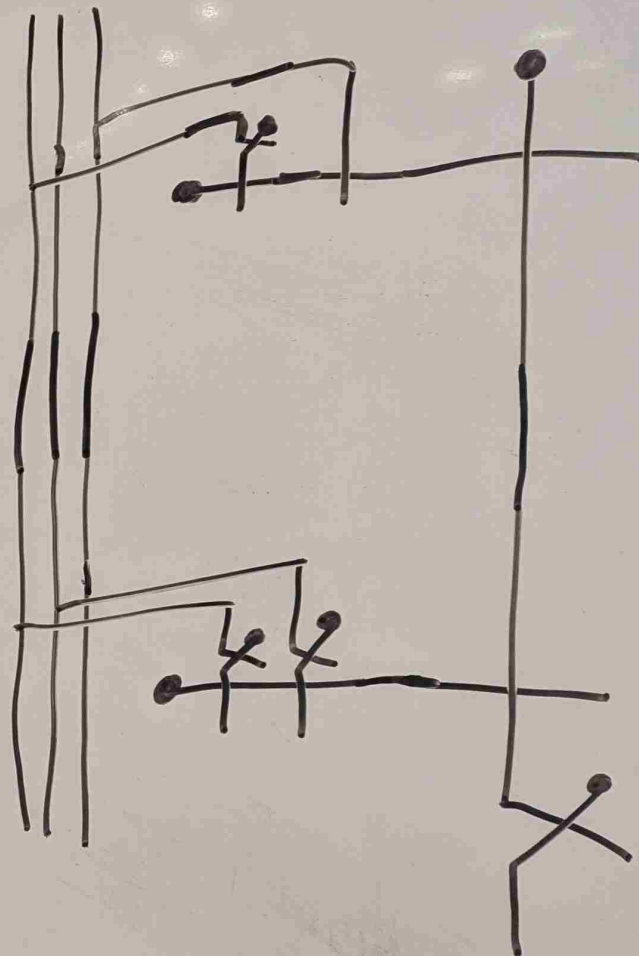


Q#4

M	C	T	
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	0
1	1	1	1

$M'CT$

$MC'T$

MCT

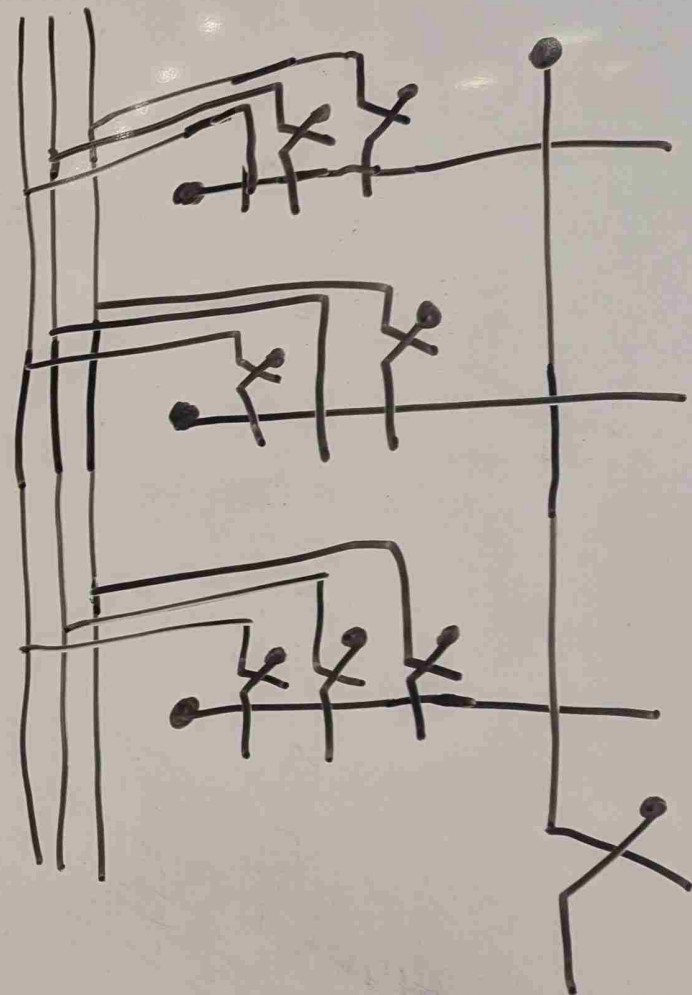

$$F = M'CT + MC'T + MCT$$

Q#4


M	C	T	
0	0	0	0
0	0	1	0
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	0
1	1	1	1

$M'CT$

$MC'T$

MCT

$$F = T(M+C)$$

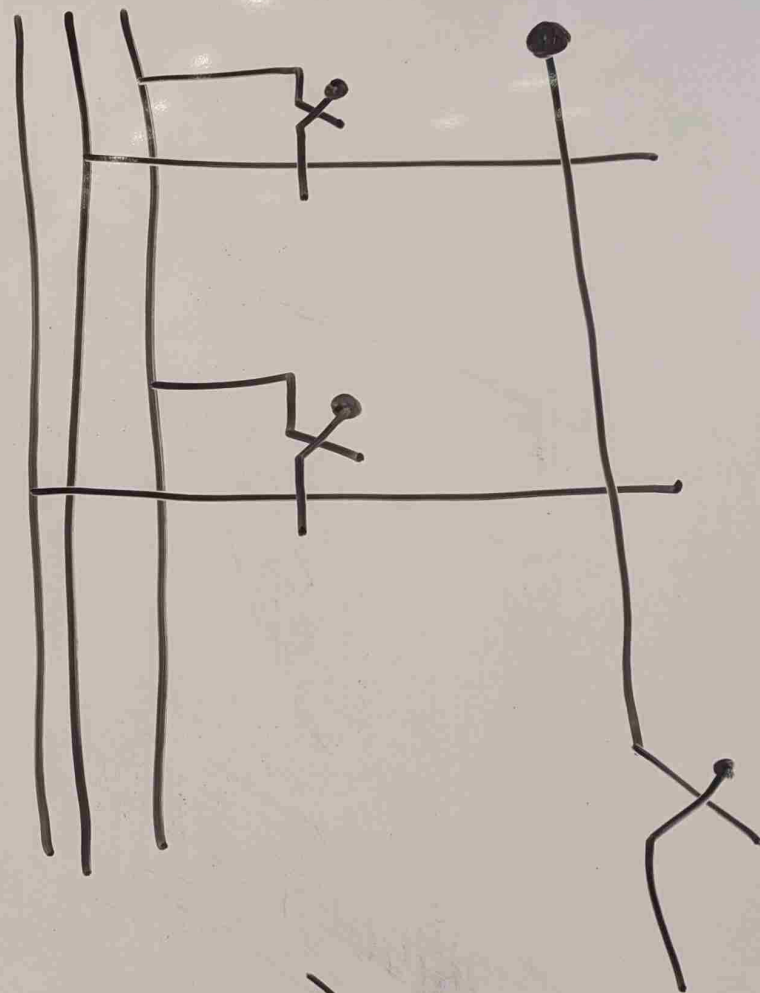

Q#5

T	H	M	
0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


T'H'M

T'HM

TH'M

THM'

THM

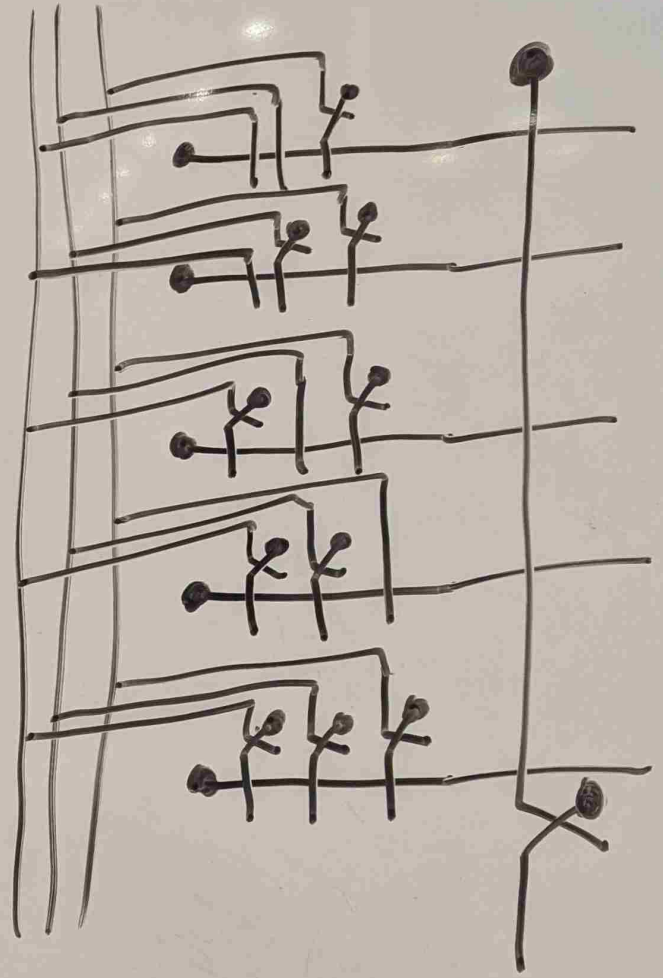

$$F = THM + T'H'M + T'HM + TH'M + THM'$$

Q#6

W D M

0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


$W'D'M$

$W'DM$

$WD'M$

WDM'

WDM

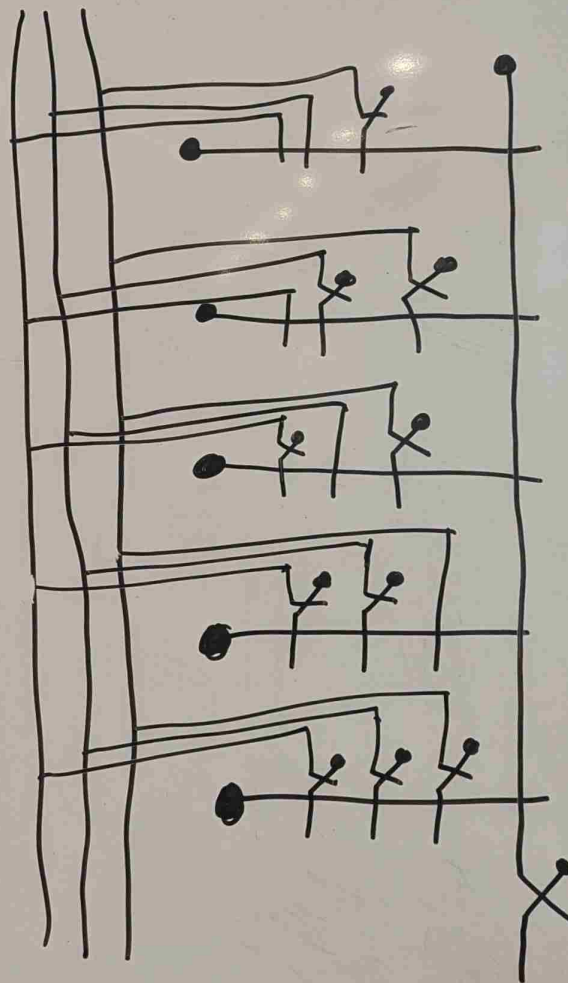

$$F = W'D'M + W'DM + WD'M + WDM' + WDM$$

Q#6 W D M

0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


W'D'M

W'DM

WD'M

WDM'

WDM

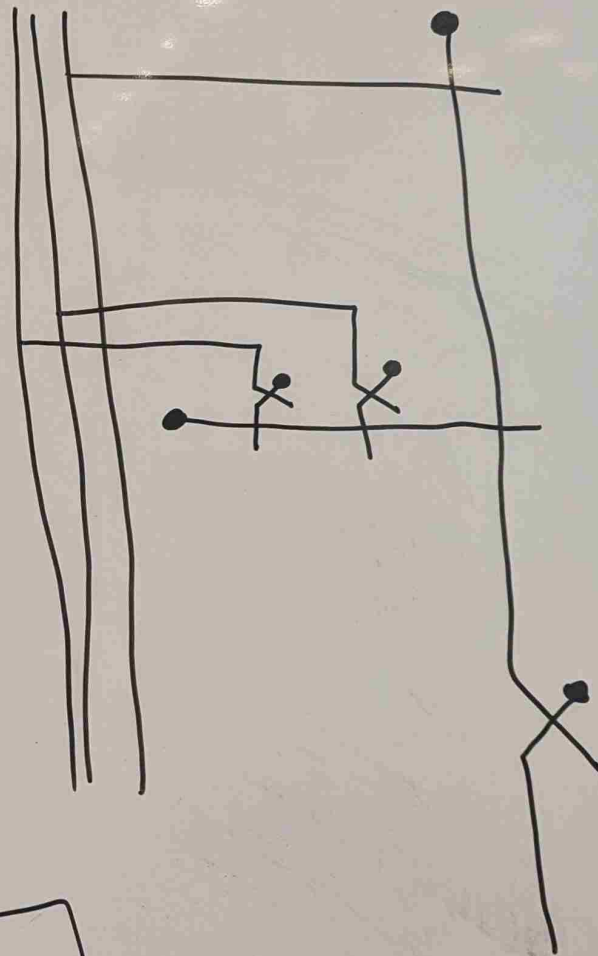

$$F = WD + M$$

Q#7

L	W	M	
0	0	0	0
0	0	1	1
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	1

$L'W'M$

$L'WM'$


$L'WM$

$LW'M'$

$LW'M$

$L'WM$

LWM

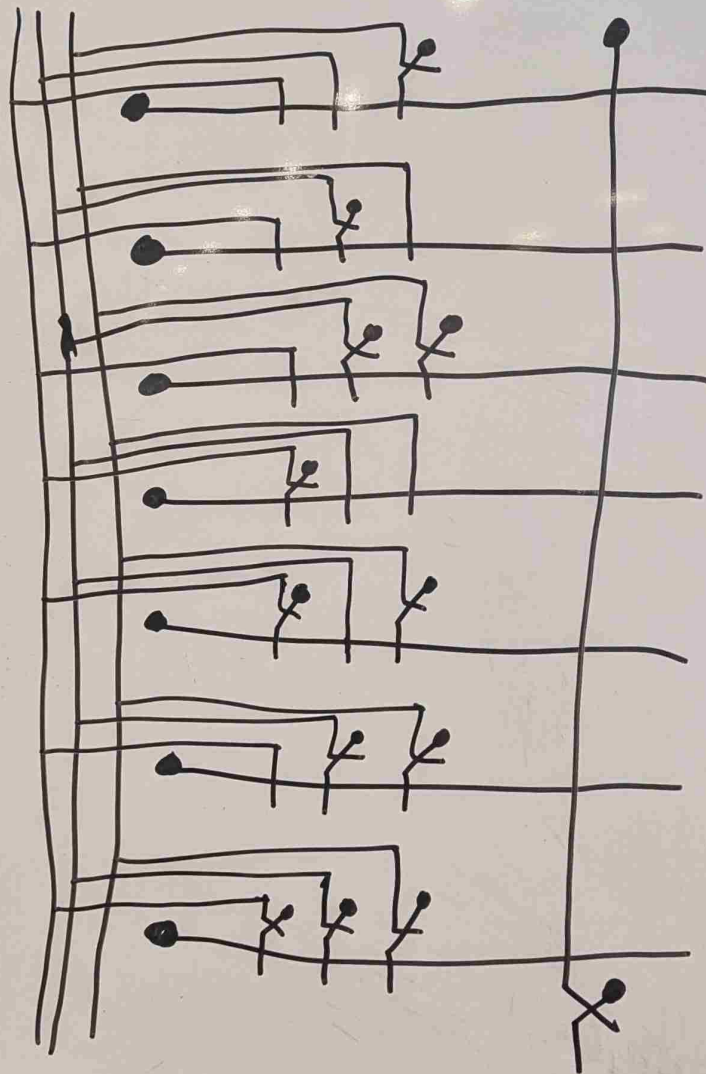


$$F = LWM + L'W'M + L'WM' + L'WM + LW'M' + LW'M + L'WM$$

Q#1 LWM

0	0	0	0
0	0	1	1
0	1	0	1
0	1	1	1
1	0	0	1
1	0	1	1
1	1	0	1
1	1	1	1

L'W'M
 L'WM'
 L'WM
 LW'M'
 LWM
 L'WM
 LWM

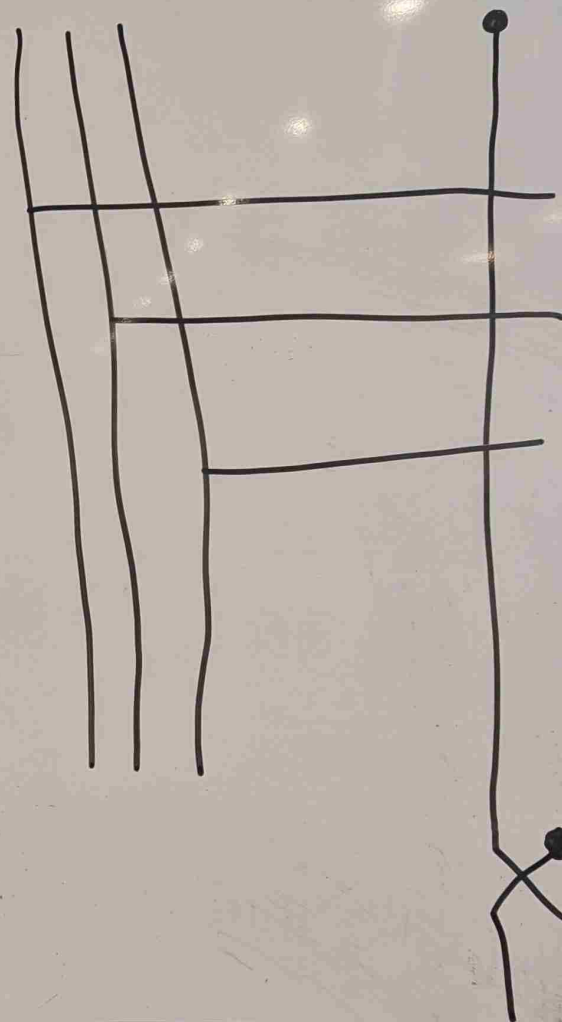

$$F = L + W + M$$

Q#8 STM

0 0 0 0

0 0 1 1

0 1 0 0

0 1 1 1

1 0 0 0

1 0 1 1

1 1 0 1

1 1 1 1


S'T'M

S'TM

ST'M

STM'

STM

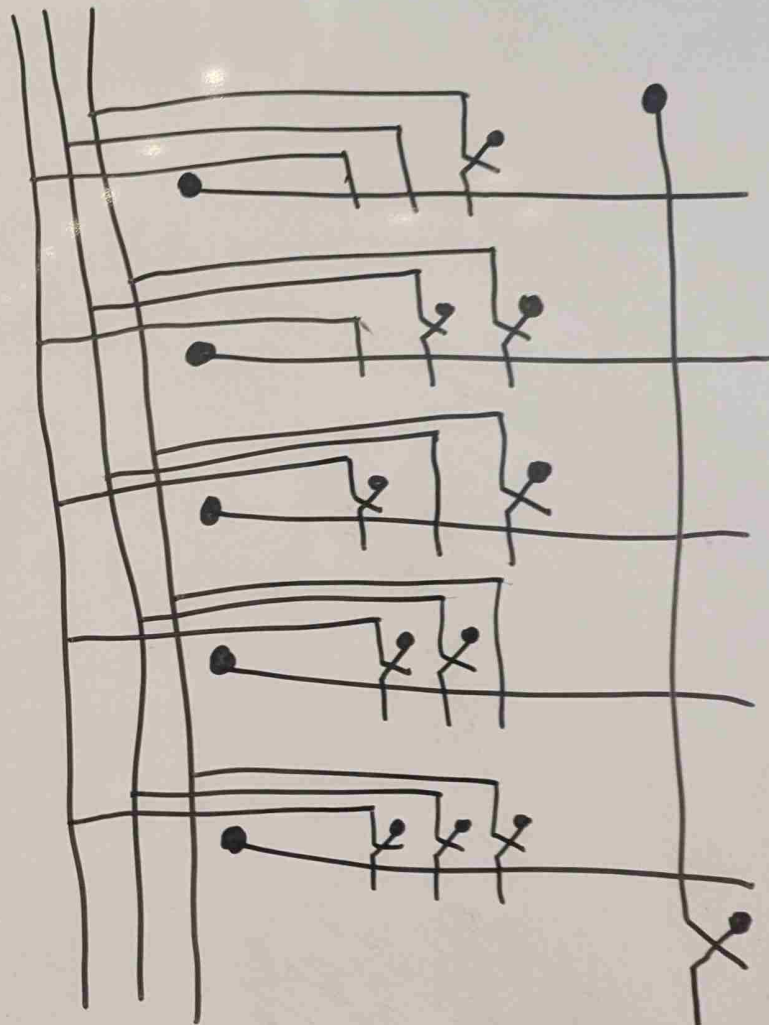

$$F = S'T'M + S'TM + ST'M + STM' + STM$$

Q#8 STM

0	0	0	0
0	0	1	1
0	1	0	0
0	1	1	1
1	0	0	0
1	0	1	1
1	1	0	1
1	1	1	1


S'T'M

S'TM

ST'M

STM'

STM

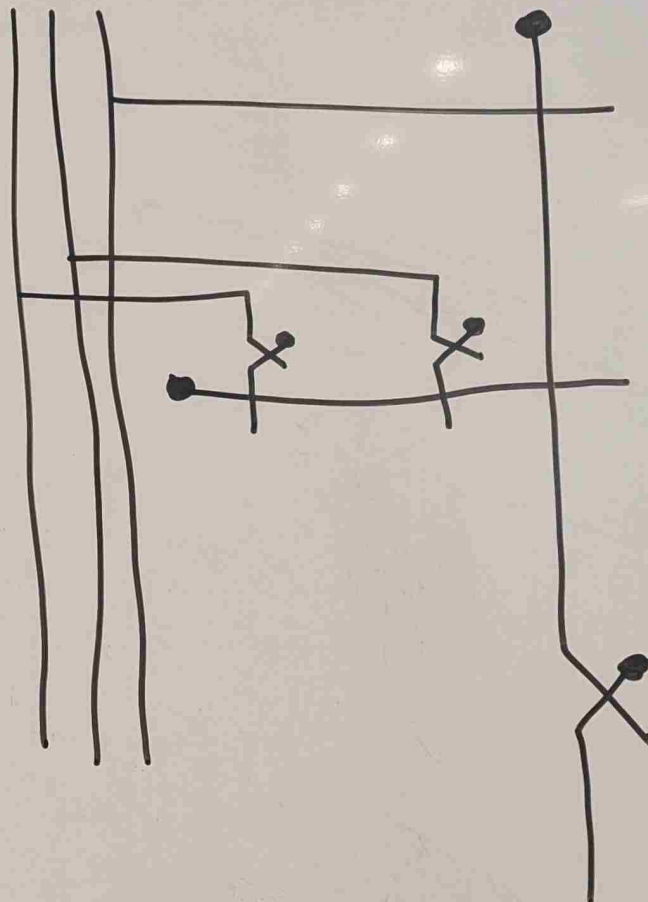

$$F = ST + M$$


Q#9

L M R

0	0	0	0
0	0	1	0
0	1	0	1
0	1	1	1
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

 $L'MR'$
 $L'MR$

LMR

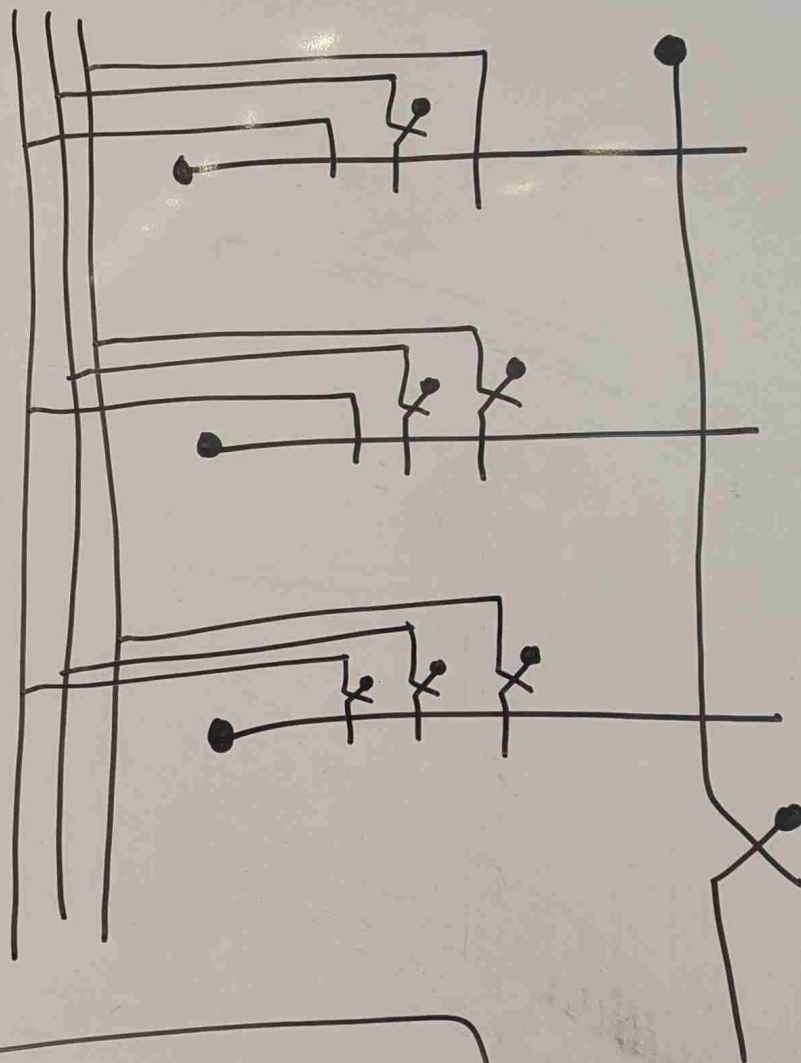

$$F = L'MR' + L'MR + LMR$$


Q#9

L M R

0	0	0	0
0	0	1	0
0	1	0	1
0	1	1	1
1	0	0	0
1	0	1	0
1	1	0	0
1	1	1	1

L' M R'
L' M R

L M R

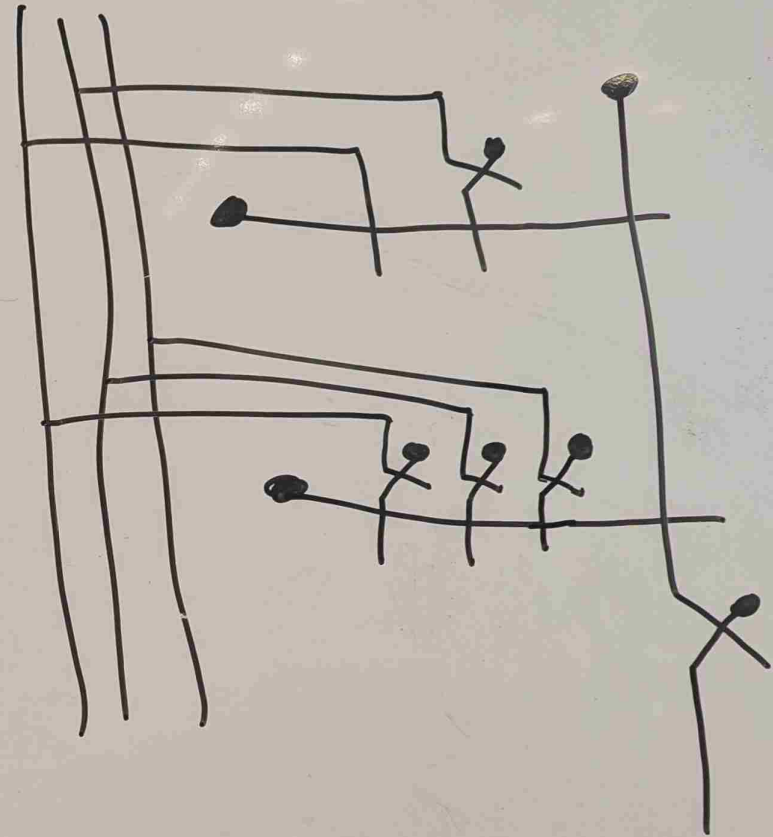


$$F = L'M + LMR$$

Q#10

B	D	W
0	0	0
0	0	1
0	1	0
0	1	1
1	0	0
1	0	1
1	1	0
1	1	1

1	$BD'W$
1	BDW'
1	BDW

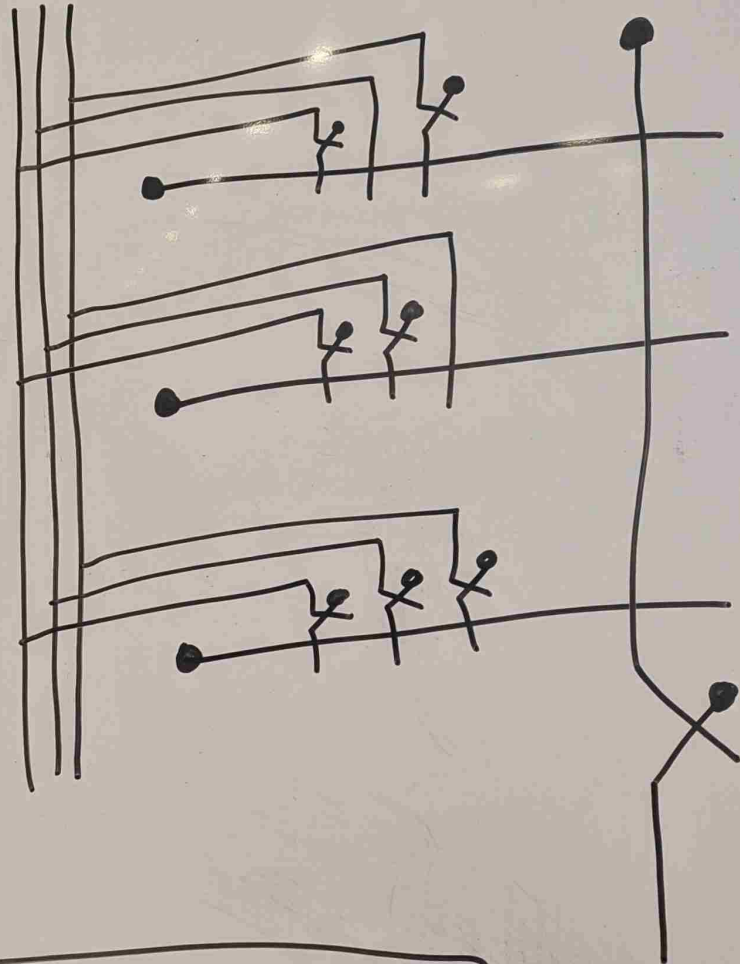


$$F = BD'W + BDW' + BDW$$

Q#10

B	D	W
0	0	0
0	0	1
0	1	0
0	1	1
1	0	0
1	0	1
1	1	0
1	1	1

1	$BD'W$
1	BDW'
1	BDW

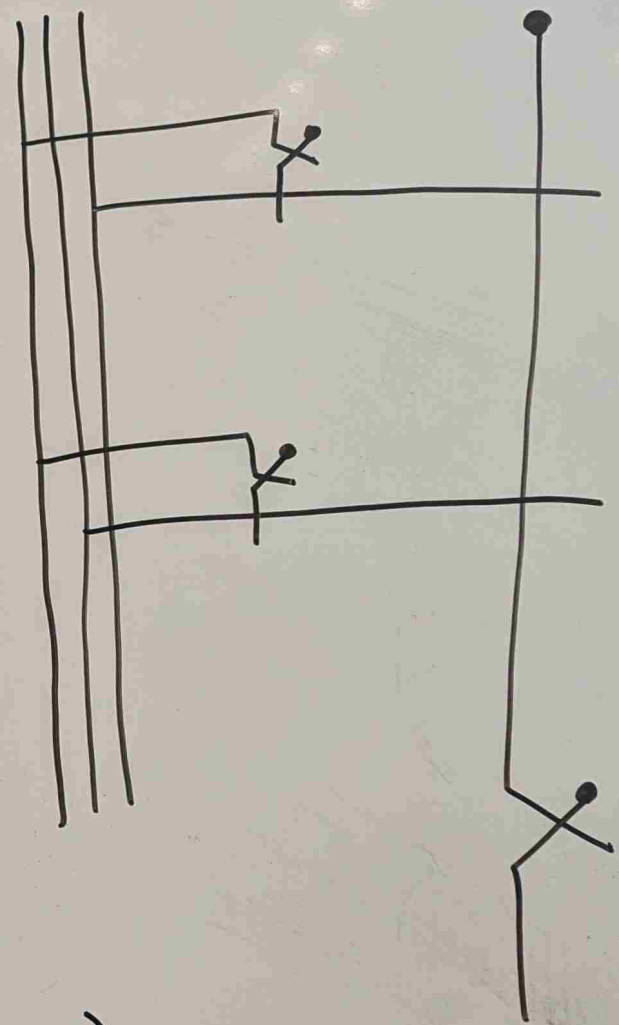

$$F = B(D + W)$$