

ARDUINO NANO (A1) + CONTROLS: 4 pots on A0–A3, 2 buttons on D3/D4, 4 LEDs on D7–D10

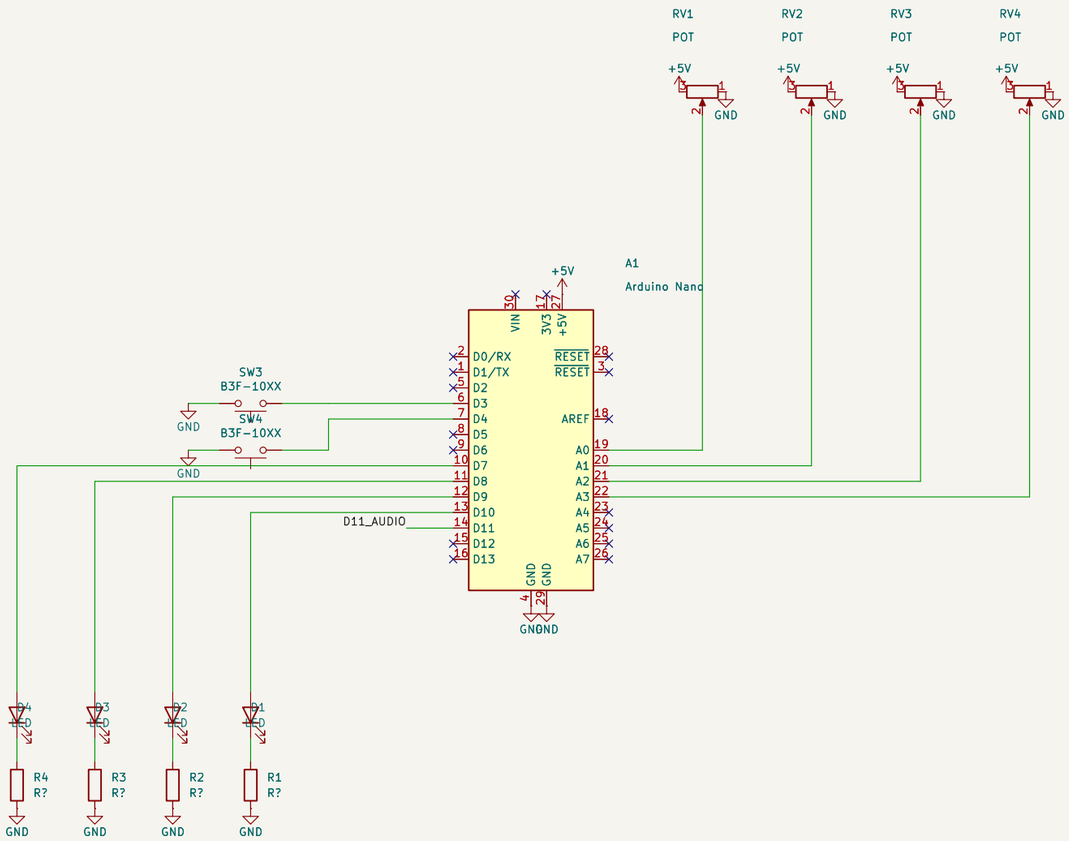

POT1–3 and RATE: 9 mm pots, no value in the Eagle file. R1–R4: no value in the Eagle file.


AUDIO: D11 PWM -> C6 / C5 -> VOL -> LM386 (U1, gain 200) -> STEREO JACK (tip + ring together)

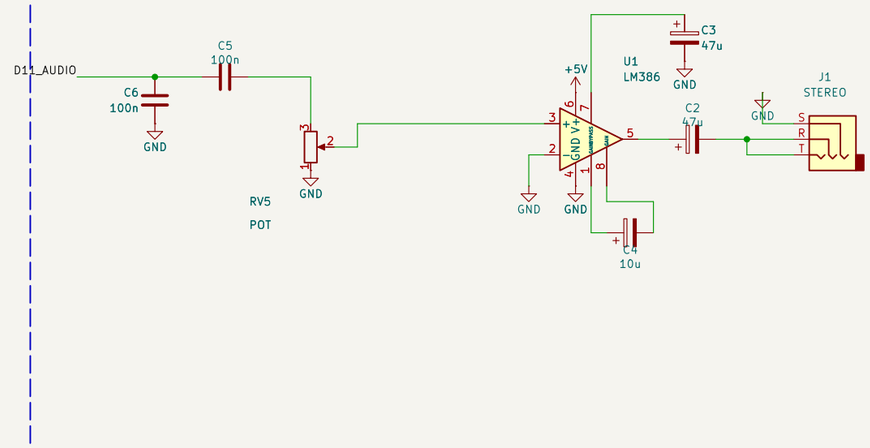

Issues: no series R on D11 (C6 loads the pin directly); gain 200 with a 5 V PWM source; no Zobel;

mono plug shorts ring to sleeve = LM386 output to ground through C2. See the GlitchStorm roadmap.

POWER (from the Nano 5V pin — USB)



No external power input: the board runs from the Nano (USB, or VIN not wired).

Refs: U$1=A1, IC1=U1, POT1–3/RATE/VOL=RV1–5, S3/S4=SW3/SW4
Arduino Nano bytebeat synth: PWM audio on D11 -> LM386 -> jack
Faithful transcription of ~/Documents/eagle/projects/GlitchStorm-v2 (sch == brd)
Super-Freq

Sheet: /
File: GlitchStorm.kicad_sch

Title: GlitchStorm v2 (as built)

Size: A3	Date: 2026-09-29	**Rev: Eagle 2025-09**
KiCad E.D.A. 10.0.4		Id: 1/1