

ARDUINO NANO (A1) + CONTROLS — pin map unchanged: pots A0–A3, buttons D3/D4, LEDs D7–D10, audio D11

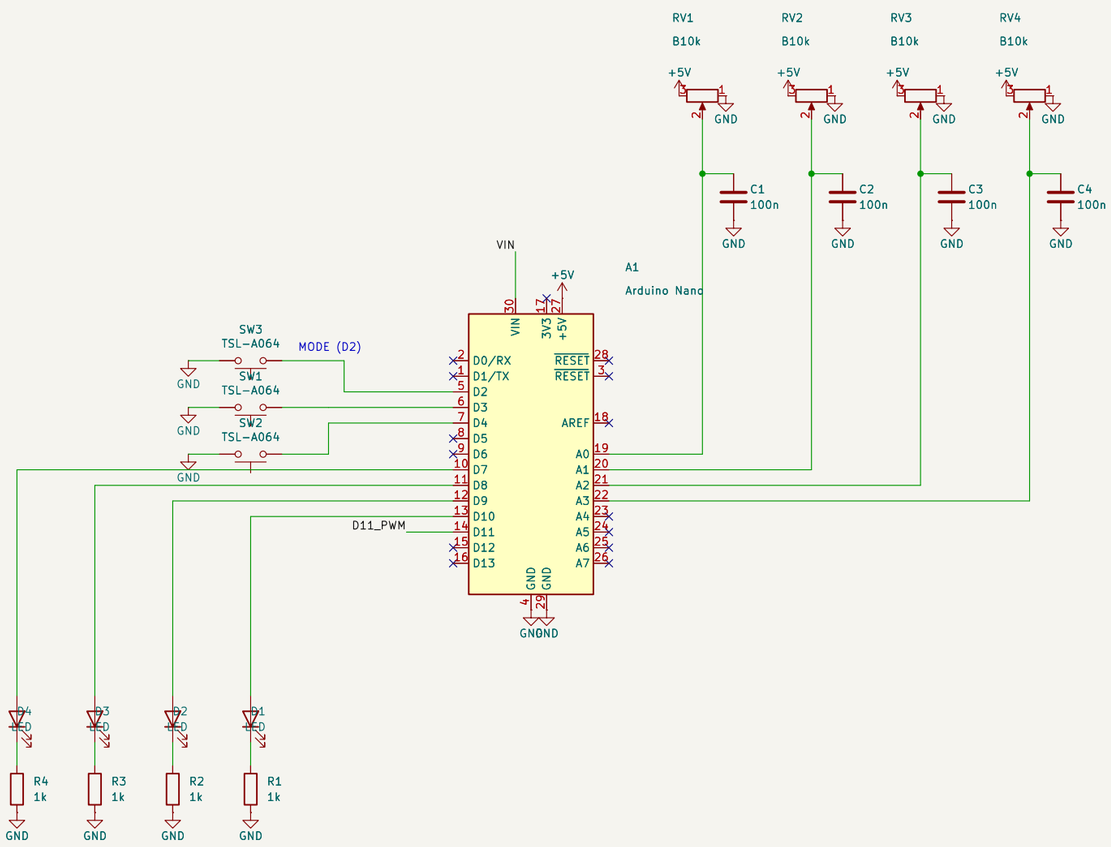


Pots B10k (ADC wants <10k source) with 100n at each ADC pin. LED resistors 1k.

PWM FILTER (2 x RC, ~16 kHz) + BUFFER (U2A) + VOLUME + BUFFER (U2B) + LINE OUT

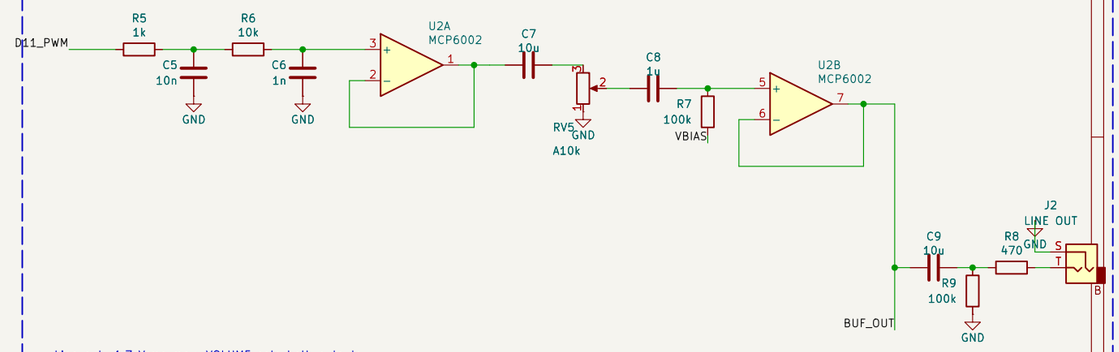


Line out ~1.7 Vrms max; VOLUME sets both outputs.

HEADPHONE AMP: LM386 (U3) gain 20, Zobel, 10R on tip AND ring (mono plugs safe)

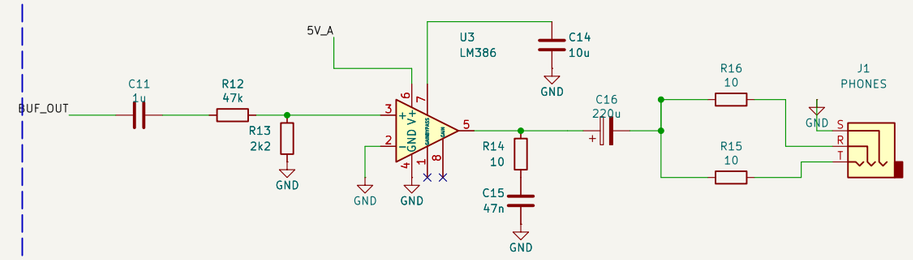

Pad sized so full VOLUME just reaches LM386 clipping on 5 V (~3.5 Vpp) into 32 ohm phones.

POWER: 9 V DC jack (centre negative) -> SS14 -> Nano VIN (USB also works). 5V_A = filtered +5V for audio

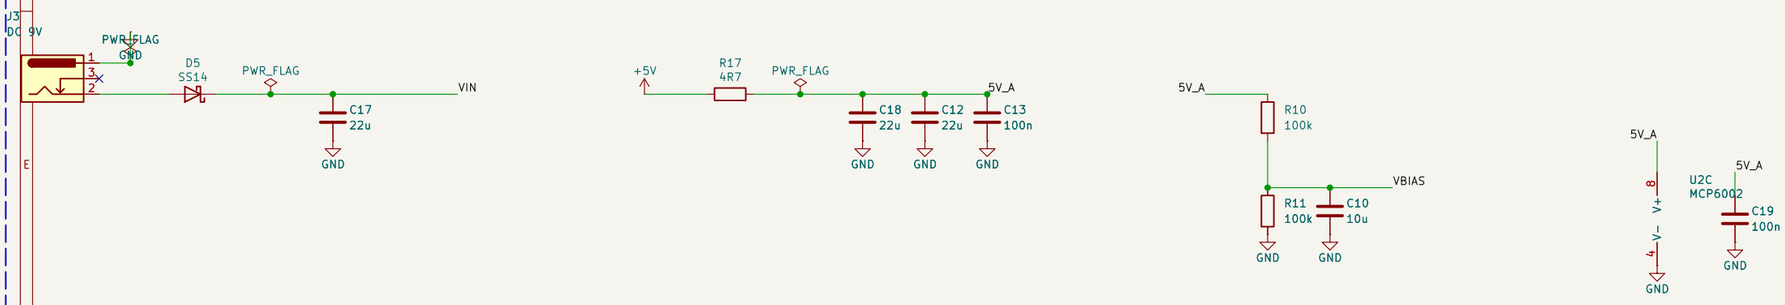

Ground: audio returns (U3, jacks, filter caps) to one point at the LM386; Nano digital ground joins there.

9 V -> VIN, filtered 5V_A for audio. DRAFT
PWM filter + MCP6002 buffers, line out + LM386 headphone amp (gain 20, Zobel, 10R tip/ring)
Fixed GlitchStorm v2: same Nano pin map (firmware unchanged)

Super-Freq

Sheet: /
File: GlitchStorm3.kicad_sch

Title: GlitchStorm v3

Size: A3	Date: 2026-09-29	**Rev: 3.0 draft**
KiCad E.D.A. 10.0.4		Id: 1/1