

POWER: Eurorack +12 V and/or 9 V barrel jack, diode-OR -> LM78M05 -> +5V

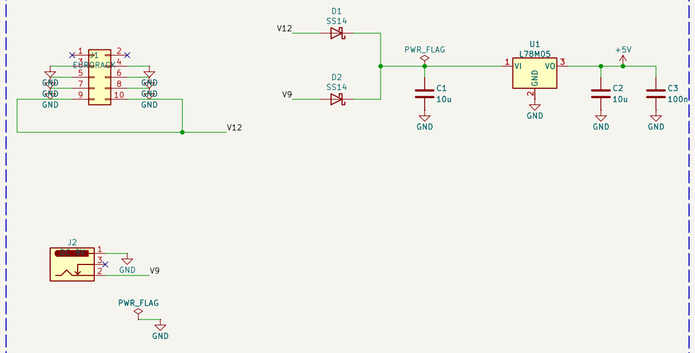


ARDUINO NANO (on headers): original Mutant pin map




VIN not used: +5V from U1 feeds the 5V pin (USB still works: the Nano has a diode on its USB 5 V).


POTS: 6x B10k 9 mm (Alpha RD901F), 100n on each wiper

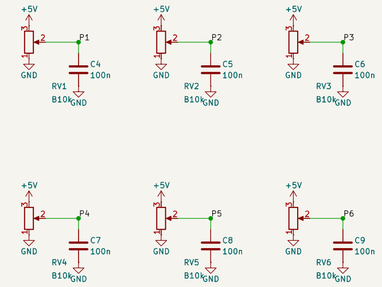


BUTTONS: 6x Tayda A-8796 (DAIER TSL-A064) to GND, Nano internal pull-ups

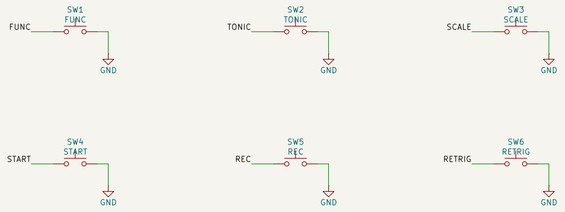

LED MATRIX: MAX7219 8x8 module on two 1x5 headers

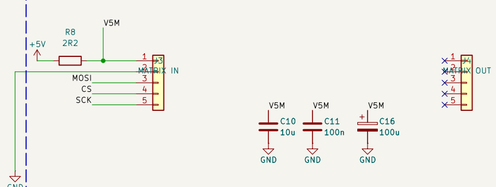


AUDIO OUT: D9 PWM -> 2nd-order RC (~16 kHz) -> MCP6002 buffer -> OUT

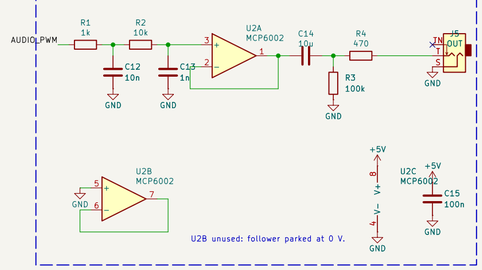

U2B unused: follower parked at 0 V.

SYNC: in (22k + BAT54S clamp, 100k pull-down) and out (1k), Volca / Eurorack compatible

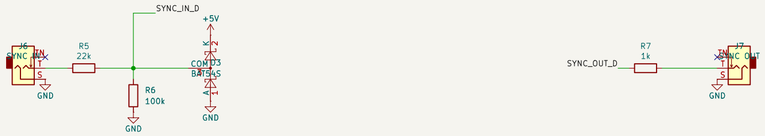

Redesign of the Mutant Eurorack module (MeeBleeps Mutant synth) for SMD (JLC) on a <= 100 mm board.

Panel geometry kept from the original (pots, buttons, matrix, jacks), so the original front panel still fits.

Bare / Eurorack: fit J1 (10-pin). Enclosure: fit J2 (9 V barrel). Both can be fitted (diode-OR).

Firmware: Mutant_Updated (Mozzi 2), unchanged pin map.

Eurorack 10-pin and/or 9 V barrel power, Nano on headers
MeeBleeps Mutant generative synth, SMD redesign, <= 100 mm board
Super-Freq

Sheet: /	
File: MutantSMD.kicad_sch	
Title: Mutant SMD	
Size: A2	Date:
KiCad E.D.A. 10.0.4	**Rev: 1.0**
	Id: 1/1