

INPUT PREAMP: TL072 inverting (U3A), gain = R5 / (R1 || R2)

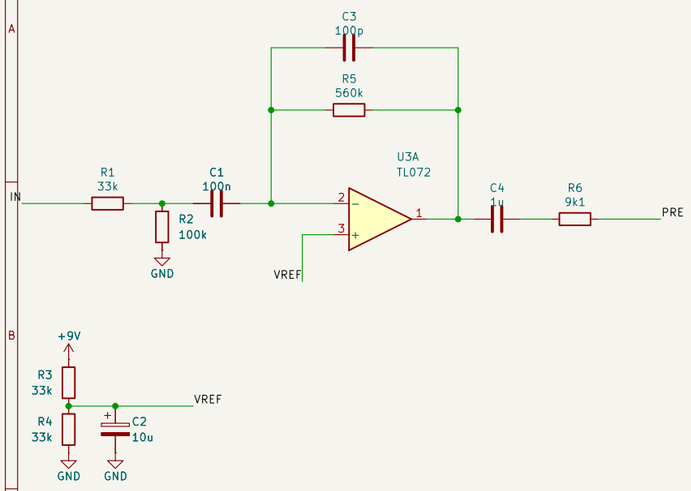


STAGE 1: GAIN divider + LM386 (U1)

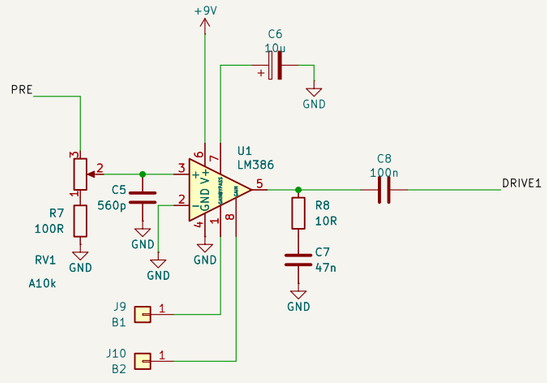


B1/B2 = U1 gain pins 1/8. Open: gain 20. 10u (+ to pin 1): gain 200. 10u + R in series: in between. Avoid a bare wire (DC bias)

STAGE 2: LM386 (U2)

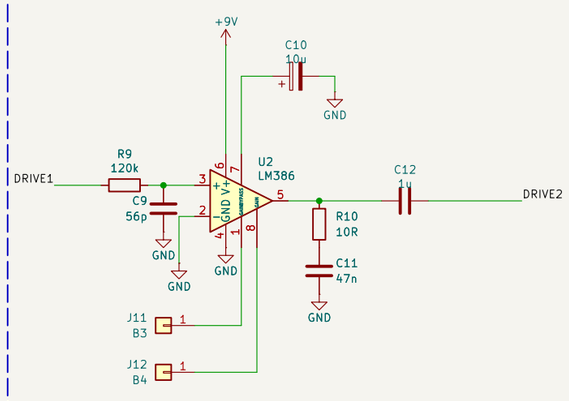


B3/B4 = U2 gain pins 1/8. Open: gain 20. 10u (+ to pin 1): gain 200. 10u + R in series: in between. Avoid a bare wire (DC bias)


TONE (Big Muff style) + VOLUME

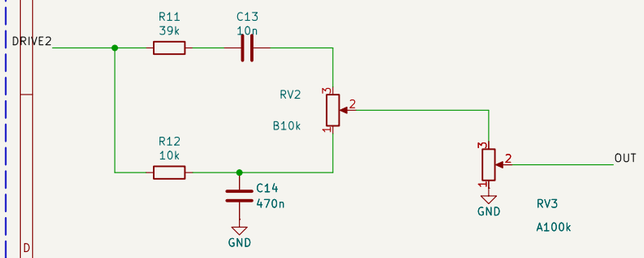

R11 39k: original used 41k. C14 470n as recorded in the original.

POWER, LED, PADS & TL072 SUPPLY

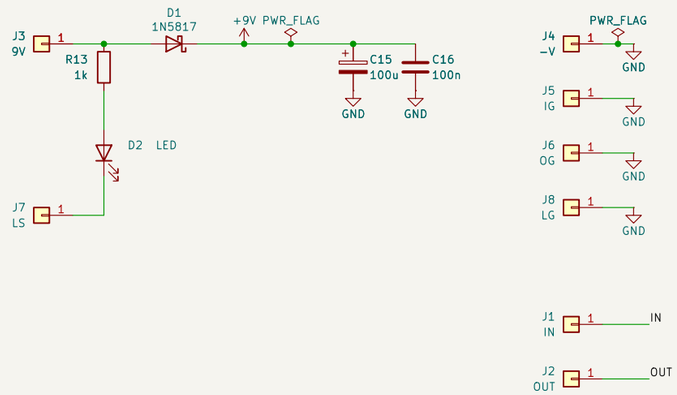

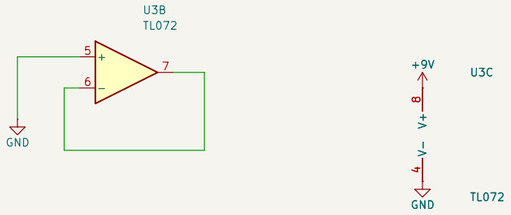

U3B unused: + to GND, output to − (as in Eagle)

Refs: GAIN/TONE/VOLUME = RV1–3; IC1–3 = U1–3; RLED = R13; pads IN OUT 9V −V IG OG LS LG B1
Frantone Peach Fuzz clone: TL072 preamp, two LM386 stages, Big Muff tone, GAIN/TONE/VOLUME
Faithful transcription of ~/Documents/eagle/projects/Peach Fuzz/Peach Fuzz (sch == brd)

Super−Freq

Sheet: /
File: PeachFuzz.kicad_sch

Title: Peach Fuzz (as built)

Size: A3	Date: 2026−09−30	**Rev: Eagle 2026−04**
KiCad E.D.A. 10.0.4		Id: 1/1