

POWER + BIAS + JACKS

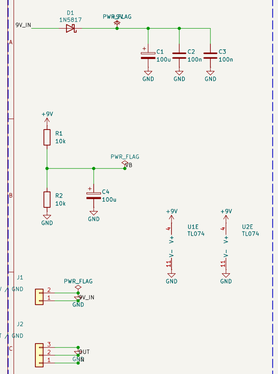



INPUT / DRIVE (U1A): gain 1 + 470k / (2k2 + DRIVE) = x1.9 to x215



BANDS: inverting MFB filters (U1B–D) -> clippers (U2A–C) -> level


LOW: MFB low-pass, fc ~225 Hz, Q 0.71, gain −1









MID: MFB band-pass, f0 ~735 Hz, Q ~1.1, gain ~2.35










HIGH: MFB high-pass, fc ~2.26 kHz, Q 0.71, gain −1







MIXER (U2D): inverting sum, 10k in / 2k2 fb (x0.22 per band), then VOLUME



Each band clips at about +−1.8 V (red LEDs): the mixer scales the sum back before VOLUME.

LOW / MID / HIGH bands spread for guitar; breadboard first
After Craig Anderton Quadrafuzz and a 3-band variant

Super-Freq	
Sheet: /	
File: TriFuzz.kicad_sch	
Title: Tri-Fuzz (multiband, 9 V)	
Size: A1 Date:	**Rev: 0.1**
KiCad E.D.A. 10.0.4	Id: 1/1