

POWER + BIAS + JACKS

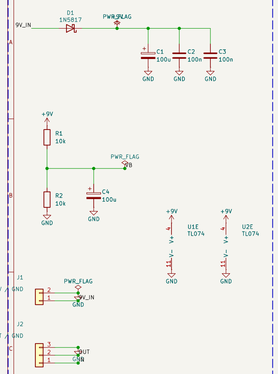



INPUT / PRE (U1A): gain 1 + 22k / (2k2 + PRE trim) = x1.4 to x11




BANDS: inverting MFB filters (U1B–D) -> clippers with DRIVE + CLIP (U2A–C; MID non-inverting = polarity flip) -> VOLUME


LOW: MFB low-pass, fc ~225 Hz, Q 0.71, gain −1










MID: MFB band-pass, f0 ~735 Hz, Q ~1.1, gain ~2.35










HIGH: MFB high-pass, fc ~2.26 kHz, Q 0.71, gain −1







MIXER (U2D): inverting sum, 10k in / 2k2 fb (x0.22 per band), CUT toggle, OUTPUT trim



CLIP per band: LED -+-1.8 V / centre off: op-amp rails -+-3 V /

SI -+-0.65 V: the band VOLUME evens the levels out.

Panel (Terrarium-style 1258): row 1 LOW / MID / HIGH VOL.

row 2 LOW / MID / HIGH DRIVE, toggles LOW / MID / HIGH CLIP + CUT.

Per-band VOLUME / DRIVE / CLIP, MID inverted; breadboard first
After Craig Anderton Quadrafuzz and a 3-band variant

Super-Freq

Sheet: /
File: TriFuzz.kicad_sch

Title: Tri-Fuzz (multiband, 9 V)

Size: A1	Date:	**Rev: 0.2**
KiCad E.D.A. 10.0.4		Id: 1/1