

POWER + BIAS + JACKS

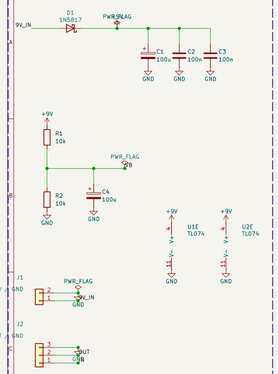



INPUT / PRE (U1A): gain 1 + 4k7 / (2k2 + PRE trim) = x1.1 to x3.1 (stays clean)




BANDS: inverting MFB filters (U1B–D) -> clippers with DRIVE + CLIP (U2A–C; MID non-inverting = polarity flip) -> VOLUME


LOW: MFB low-pass, fc ~180–400 Hz (trim), Q ~0.7, gain ~1










MID: MFB band-pass, f0 ~590–1180 Hz (trim), Q ~0.9–1.7, gain ~1.07









HIGH: MFB high-pass, fc ~1.65–3.75 kHz (trim), Q ~0.5–1.2, gain ~1





MIXER (U2D): inverting sum, 10k in / 2k2 fb (x0.22 per band), OUTPUT trim



CLIP per band (up / centre / down): symmetric / op-amp rails / asymmetric.

LOW LED–LED (+–1.8 V) / rails / LED+ Si– (+1.8 / –0.65)

MID 2Si–2Si (+–1.3 V) / rails / 2Si+ Si– (+1.3 / –0.65)

HIGH Si–Si (+–0.65 V) / rails / 2Si+ Si– (+1.3 / –0.65)

Asymmetric = even-order harmonics: the bigger drop is on the + side in every band.

Panel (125B): row 1 LOW / MID / HIGH VOL, row 2 DRIVE, row 3 CLIP toggles.

Internal trims: PRE, OUTPUT, LOW / MID / HIGH crossover.

Per-band VOL / DRIVE / CLIP (sym / rails / asym), trim crossovers, MID inverted
After Craig Anderton Quadrafuzz and a 3-band variant

Super-Freq

Sheet: /

File: TriFuzz.kicad_sch

Title: Tri-Fuzz (multiband, 9 V)

Size: A1	Date:	**Rev: 0.3**
KiCad E.D.A. 10.0.4		Id: 1/1