

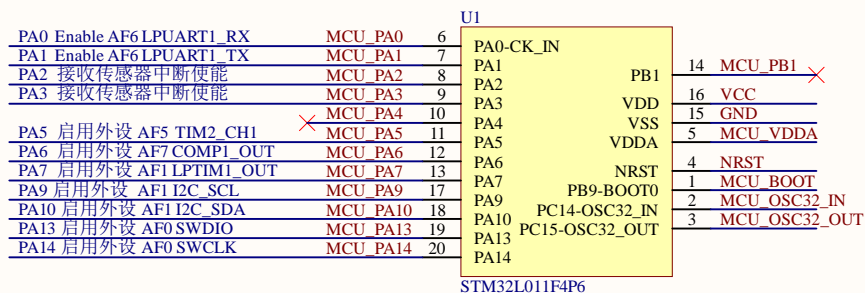



电池升压3V电路









国星光电 白光LED NCD0805W1
Vfmin 2.6V
Vfmax 3.6V

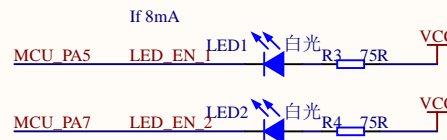



MOD 1: Slave address is 1101011b
MOD 0: Slave address is 1101010b (default)



MOD 1: I2C enable/SPI idle (default)
MOD 0: I2C disable/SPI communication (need MCU pulldown as SPI_CS)

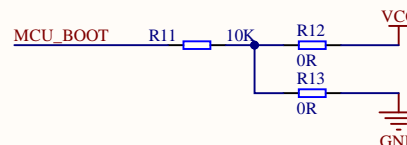

内部参考电压 Vrefint 1.224V
内部参考电压 Vmin 1.204V



Title		
Size A4	Number	Revision
Date:	4/16/2025	Sheet of
File:	C:\Users\...\Sheet1.SchDoc	Drawn By:

Board Stack Report