
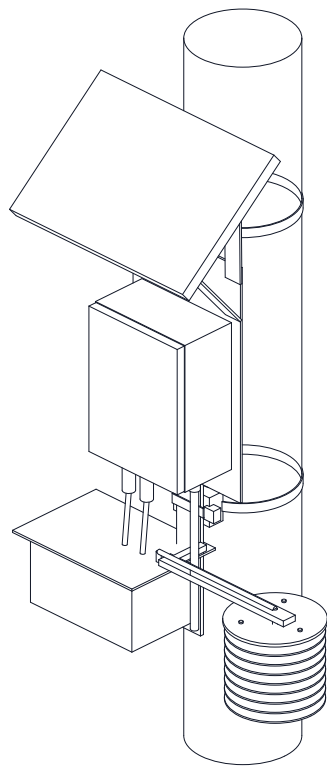


CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (from cad/src/model.py)	2026-09-25	AC

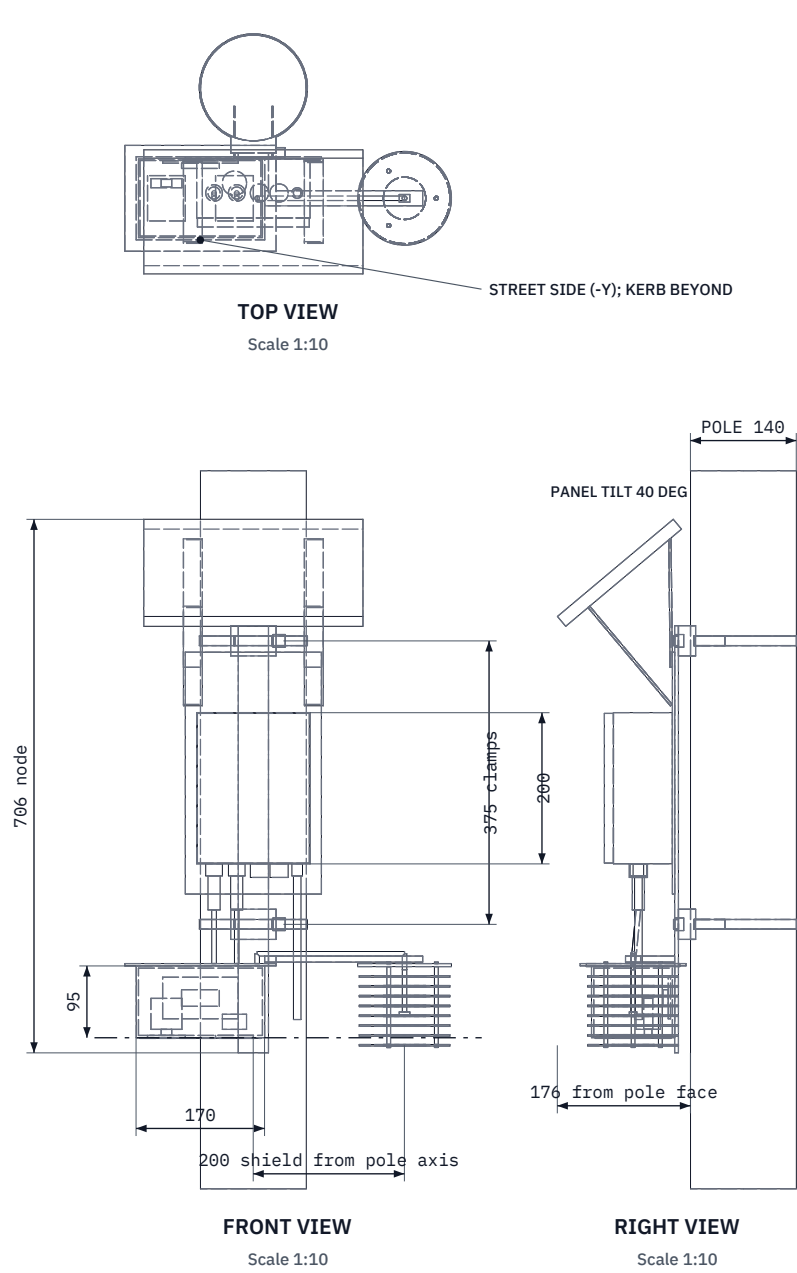

ISOMETRIC VIEW
Not to scale; pole stub shown

MAIN DIMENSIONS AND INTERFACES (MM)

Pole 80 to 200 OD (design 140); two 12.7 stainless band clamps, V-saddles
Rail 40 x 5 aluminum, 565 long; FieldNode back plate bolted to it
FieldNode core 150 x 90 x 200, underside 3,230; 6 W panel at 40 deg
Pod 170 x 110 x 95, open underneath behind mesh; drip lid +15 each side
Inlet plane 3,000 above sidewalk, chain line in front view (EU 1,500 to 4,000)
Shield 8 plates 120 OD at 13 pitch; T and RH probe at 3,032
M12 port A (switched 5 V): SPS30 and SHT45; port B (5 V held on): NO2 front end
FieldNode whip at x = 58, 23 clear of the pod lid
Mass 3.65 kg, frontal area 0.14 m² (AST-CAL-001; R13 not met)
Third-angle; front view from the street (-Y); pole on the Z axis

AIRSTREET

General arrangement

DRAWING NO. AST-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES FieldNode core per FND; bought-in parts per bom/bom.csv. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com			Generated from cad/src; do not edit by hand		