
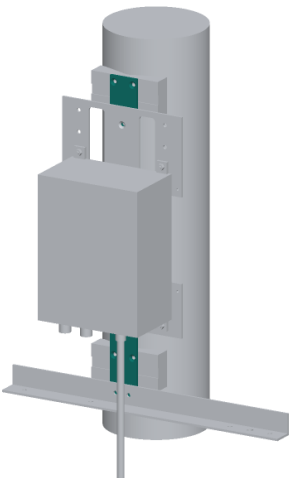
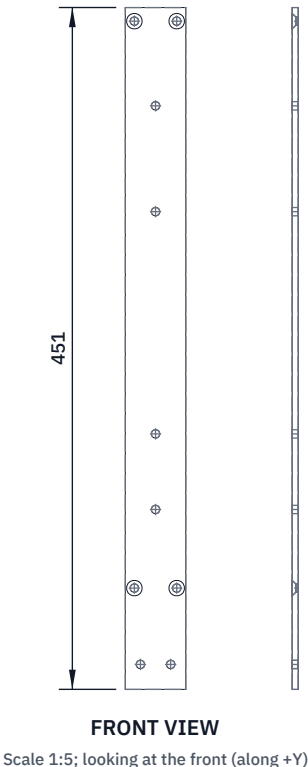


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Lighter rail: 40 x 4 mm bar (was 40 x 5)	2026-10-02	AC



WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 451 mm of 40 x 4 mm flat bar; square and deburr the ends.
Heights up from the bottom end; the front is the face away from the pole.
Saddle screws: 5.5 mm, 14 mm each side of centre, 67 and 442 up;
countersink from the front so M5 countersunk heads sit flush.
Cross arm bolts: 5.5 mm, 10 mm each side of centre, 16.5 up.
Adapter plate bolts: 5.5 mm on the centre line, 119, 169, 316, 386 up
(plain holes: the countersinks are in the plates).
The saddle centres are 51 and 426 up (375 mm apart).
Fit: saddles behind, plates and cross arm in front; see the build plan.
Check: lay the plates and arm on it; every hole lines up.

AirStreet rail: making sketch

DRAWING NO. AST-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES Aluminium flat bar 40 x 4 mm, 6082 or 6063 class					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand		