
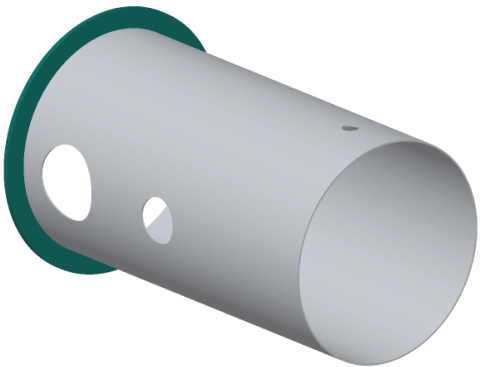
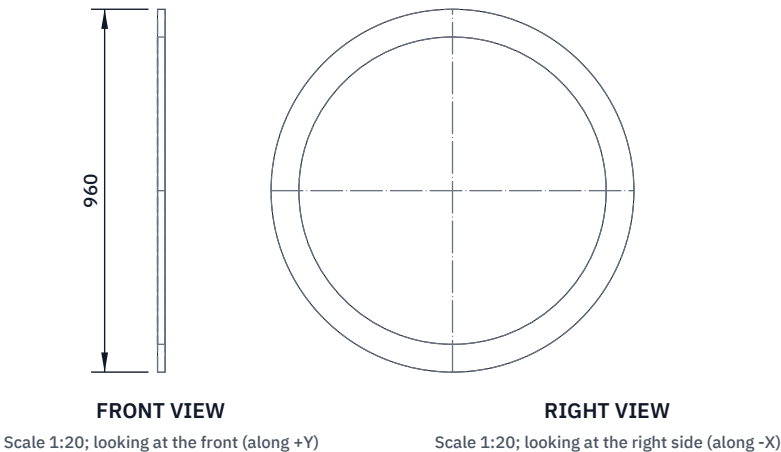


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-10-03	AC

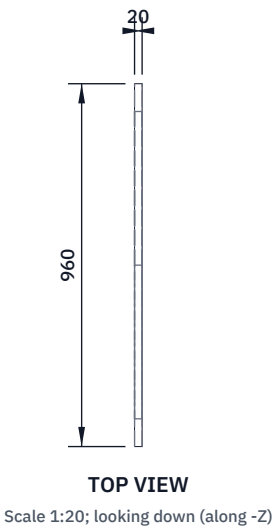

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut two rings 960 OD x 813 ID from 20 mm plate (plasma or waterjet)
The ring is a close fit over the pipe and the door head's skirt
Mark the face that will touch the gasket on each ring and keep it clean of spatter; weld only on the back face and in the bore
Shell ring: slide on until its gasket face is flush with the pipe end; fillet weld all round on both sides of the ring (6 mm leg)
Door ring: fits over the door head's 40 mm skirt, face flush with the skirt's end; fillet weld all round on both sides
Weld in short runs at opposite points to keep the faces flat
Check: each gasket face flat within 1 mm on a straight edge

ALTIRIG

github.com/BoujeeEnjinia1701/altirig

AltIRig flange rings: shell end and door (make 2)

DRAWING NO. ALR-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:20	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel plate 20 thick (S275 or A36)					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	