
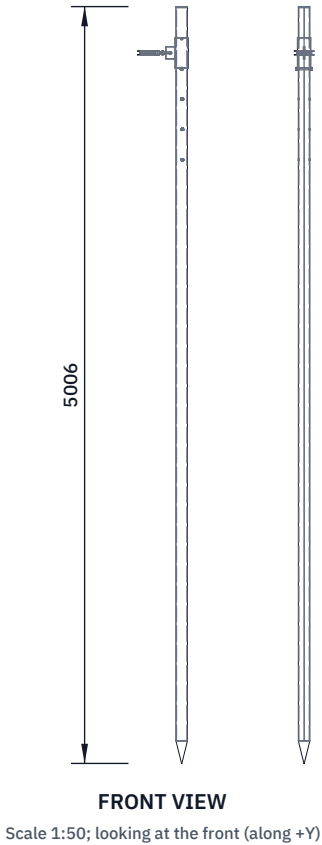


CONCEPT, NOT FOR FABRICATION

BankHaul · github.com/BoujeeEnjinia1701/bankhaul



ISOMETRIC VIEW

Not to scale; seen from the front right and above, about 30 deg elevation

MAIN DIMENSIONS AND INTERFACES (MM)

- Stake 76.1 x 3.6 S355 tube, 5,000 long overall with a 150 point; 33.2 kg (2)
- Driven 3,500 into the bed; design water depth 1,000; top 500 above the water
- Cap disc 6 thick takes the driving cap; never drive on the open tube
- Five 12.5 holes at 200 pitch for the M12 stop pin (14)
- Collar 88.9 x 3.2 x 200 turns on the stake and rests on the pin (3)
- Collar lug 8 thick, 18 hole 75 from the stake axis
- Far sheave 200 above the water at the design level (8, 13)
- Move the pin up or down a hole to follow the season's water level
- Lateral capacity: BKH-CAL-001, section E (factor 2.03 in very soft mud)
- Third-angle; front view from -Y; the loop arrives from -X; (n) = BOM line

BANKHAUL

github.com/BoujeeEnjinia1701/bankhaul

Far end: stake, swivel collar and far block, general arrangement

DRAWING NO. BKH-DWG-002			REV P3	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Steel tube S355 per bom/bom.csv; bought block and shackle. PRELIMINARY, NOT FOR FABRICATION					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand