

EE3621: Digital Signal Processing

Lecture 19: IIR Filter - Parallel Form Realization

(III B.Tech EEE)

September 23, 2026

1. LEARNING OBJECTIVES

By the end of this lecture, students will be able to:

1. **Perform** Partial Fraction Expansion on high-order rational transfer functions $H(z)$.
 2. **Combine** complex conjugate residue pairs into real second-order parallel branches.
 3. **Draw** complete Parallel Realization signal flow graphs.
 4. **Evaluate** noise and latency benefits of parallel architectures.
-

2. MATHEMATICAL FOUNDATIONS

2.1 Parallel Realization Formulation

Given rational $H(z) = \frac{B(z)}{A(z)}$ with $M \leq N$:

$$H(z) = C + \sum_{k=1}^{K_1} \frac{A_k}{1 - p_k z^{-1}} + \sum_{k=1}^{K_2} \frac{\gamma_{0k} + \gamma_{1k} z^{-1}}{1 + a_{1k} z^{-1} + a_{2k} z^{-2}}$$

Where $C = b_N/a_N$ if $M = N$ (and $C = 0$ if $M < N$).

- **Real poles** yield 1st-order sections: $H_k(z) = \frac{A_k}{1 - p_k z^{-1}}$.
- **Complex conjugate pole pairs** p_k, p_k^* yield 2nd-order sections:

$$\frac{R_k}{1 - p_k z^{-1}} + \frac{R_k^*}{1 - p_k^* z^{-1}} = \frac{2\text{Re}(R_k) - 2\text{Re}(R_k p_k^*) z^{-1}}{1 - 2\text{Re}(p_k) z^{-1} + |p_k|^2 z^{-2}} = \frac{\gamma_{0k} + \gamma_{1k} z^{-1}}{1 + a_{1k} z^{-1} + a_{2k} z^{-2}}$$

Pictorial Representations

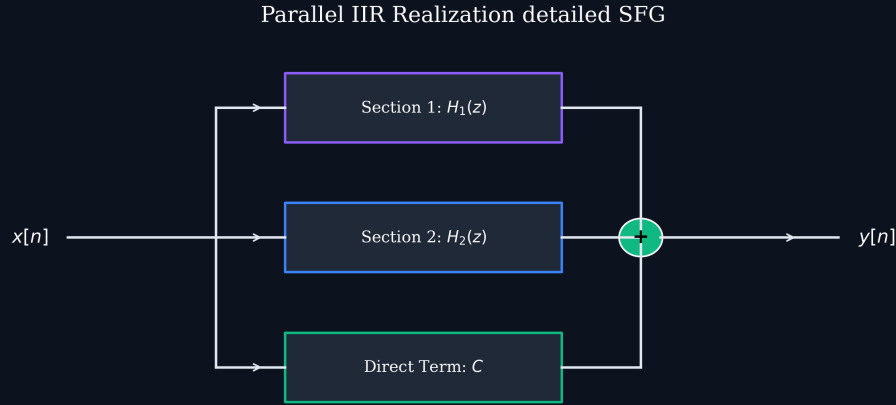


Figure 1: Iir Parallel Sfg

3. WORKED NUMERICAL EXAMPLES

Example 19.1: Parallel Realization of a 2nd-Order IIR Filter

Problem: Realize $H(z) = \frac{1+2z^{-1}+z^{-2}}{1-0.75z^{-1}+0.125z^{-2}}$ in Parallel Form.

Solution: Since numerator degree $M = 2$ and denominator degree $N = 2$, first divide out constant C : Denominator factors: $(1 - 0.5z^{-1})(1 - 0.25z^{-1})$.

$$H(z) = \frac{1 + 2z^{-1} + z^{-2}}{(1 - 0.5z^{-1})(1 - 0.25z^{-1})} = C + \frac{A}{1 - 0.5z^{-1}} + \frac{B}{1 - 0.25z^{-1}}$$

Using polynomial division: $C = \frac{b_2}{a_2} = \frac{1}{0.125} = 8$. Alternatively, standard PFE:

$$H(z) = \frac{A_0}{1} + \frac{A_1}{1 - 0.5z^{-1}} + \frac{A_2}{1 - 0.25z^{-1}}$$

Let $z^{-1} = 2 \implies A_1 = \frac{1+2(2)+4}{1-0.25(2)} = \frac{9}{0.5} = 18$. Let $z^{-1} = 4 \implies A_2 = \frac{1+2(4)+16}{1-0.5(4)} = \frac{25}{-1} = -25$.

Evaluating at $z^{-1} = 0$: $H(1) = 1 = C + A_1 + A_2 \implies 1 = C + 18 - 25 \implies C = 8$.

$$H(z) = 8 + \frac{18}{1 - 0.5z^{-1}} - \frac{25}{1 - 0.25z^{-1}}$$