


CONCEPT, NOT FOR FABRICATION


BinLevel · github.com/BoujeeEnjinia1701/binlevel

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-10-02	AC

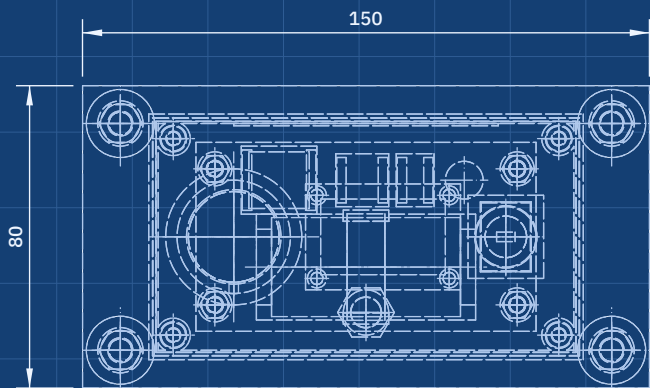


TOP VIEW

Scale 1:2; looking down (along -Z)

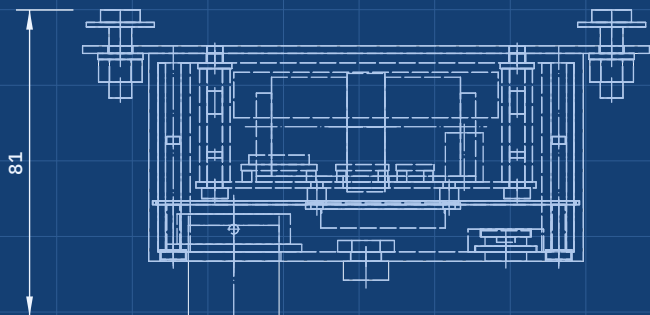


FRONT VIEW

Scale 1:2; looking at the front (along +Y)



RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

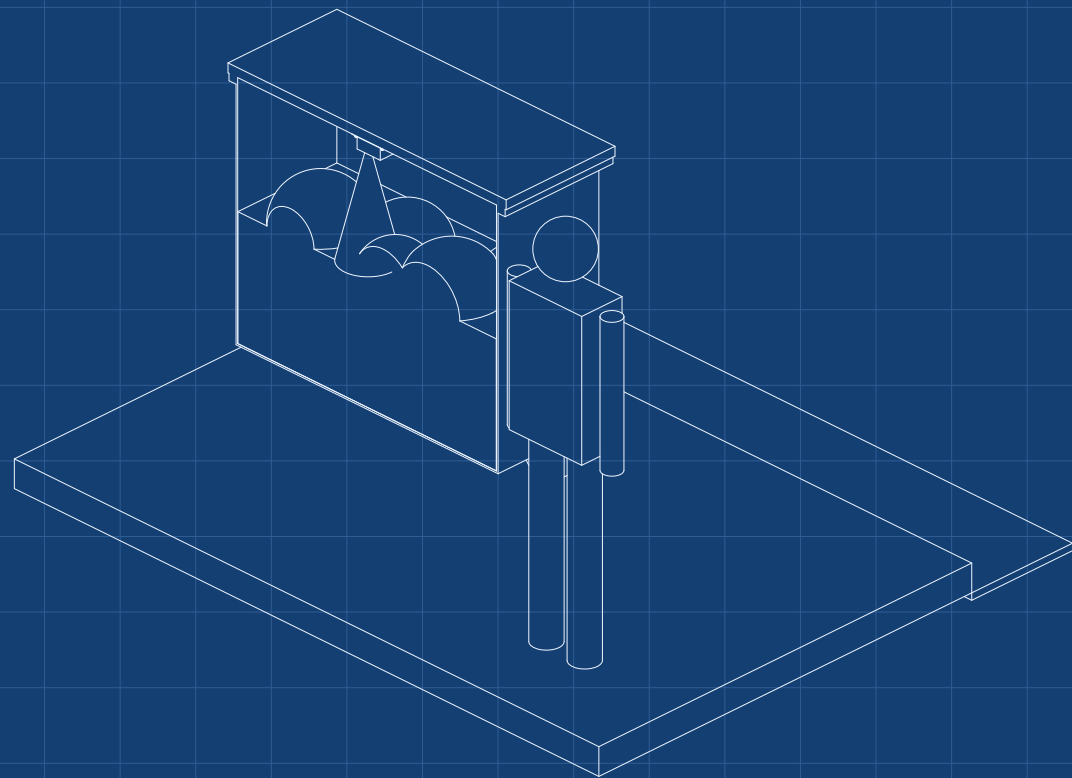

ISOMETRIC VIEW

Not to scale; grey is for scale; seen from the front right and above, about 30 deg elevation

KEY FIGURES

Ultrasonic from 0.25 m, ToF to 0.4 m; 80 % fill is 0.20 m below the face
Reading every 15 min; uplink every 1 h (2 h at SF12), or at once on 80 %
LoRaWAN Class A, 11-byte payload; fill, temperature, tilt, battery only
Li-SOCl₂ C cell: 16 years worst case (SF12) on paper; 10-year design life
About 350 g and \$59 in parts (BNL-CAL-001 v0.5)

BINLEVEL

github.com/BoujeeEnjinia1701/binlevel

Lid-mounted fill-level sensor concept

DRAWING NO. BNL - DWG - 010		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-10-02	DRAWN Amish Chadha

MATERIAL / NOTES
Massing model for concept communication

Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com

Generated from cad/src; do not edit by hand