



CONCEPT, NOT FOR FABRICATION

REV	DESCRIPTION	DATE	BY
P1	Concept sheet	2026-09-26	AC

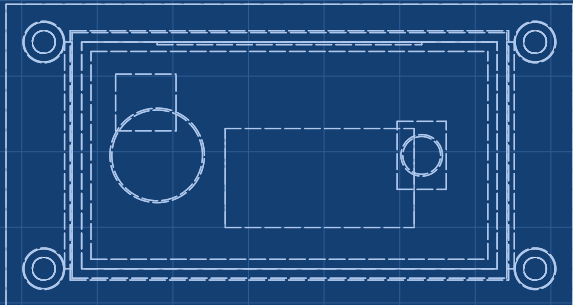


TOP VIEW

Scale 1:2

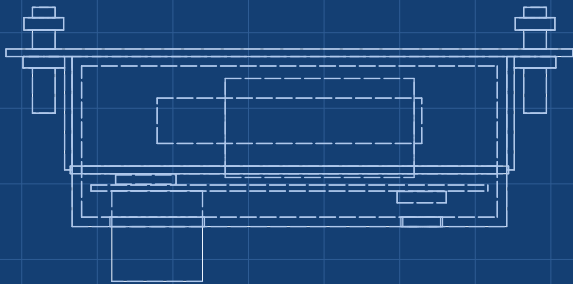


FRONT VIEW

Scale 1:2



RIGHT VIEW

Scale 1:2

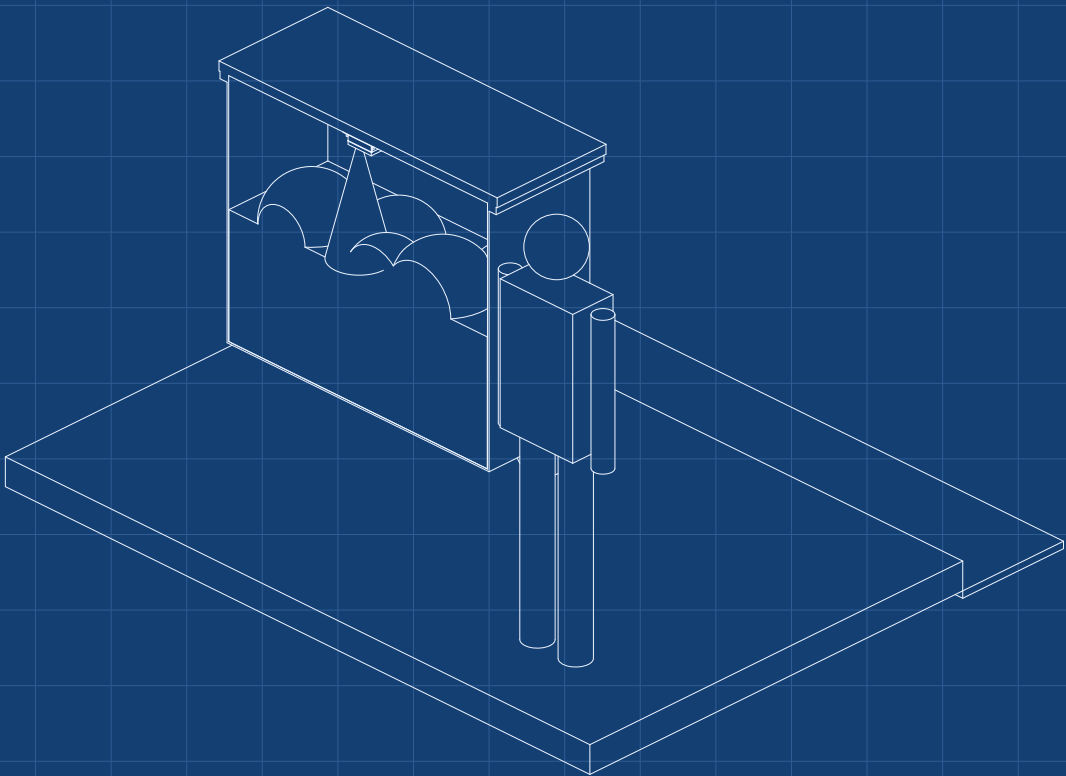

ISOMETRIC VIEW

Not to scale; grey is for scale

KEY FIGURES

Ultrasonic from 0.25 m, ToF to 0.4 m; 80 % fill is 0.20 m below the face
Reading every 15 min; uplink every 1 h (2 h at SF12), or at once on 80 %
LoRaWAN Class A, 11-byte payload; fill, temperature, tilt, battery only
Li-SOCl2 C cell: 16 years worst case (SF12) on paper; 10-year design life
About 334 g (2 mm aluminium bracket) and \$55 in parts (BNL-CAL-001)

BINLEVEL

Lid-mounted fill-level sensor concept

DRAWING NO. BNL - DWG - 010			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-26	DRAWN Amish Chadha	

MATERIAL / NOTES
Massing model for concept communication