


PRELIMINARY, NOT FOR FABRICATION


BreakHook · github.com/BoujeeEnjinia1701/breakhook

REV	DESCRIPTION	DATE	BY
P1	Preliminary GA of the constructable design (TRL 3; BHK-DDR-002)	2026-10-03	AC
P2	Fork prop added, detail C (BHK-DDR-003)	2026-10-03	AC

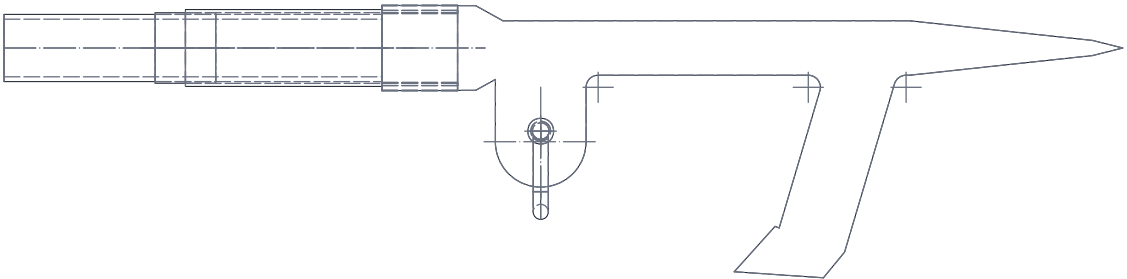


DETAIL A: HOOK HEAD

Scale 1:5; looking at the front (along +Y); pole tip shown cut short



DETAIL B: POLE JOINT

Scale 1:5; looking at the front (along +Y); sleeve bonded to the lower section

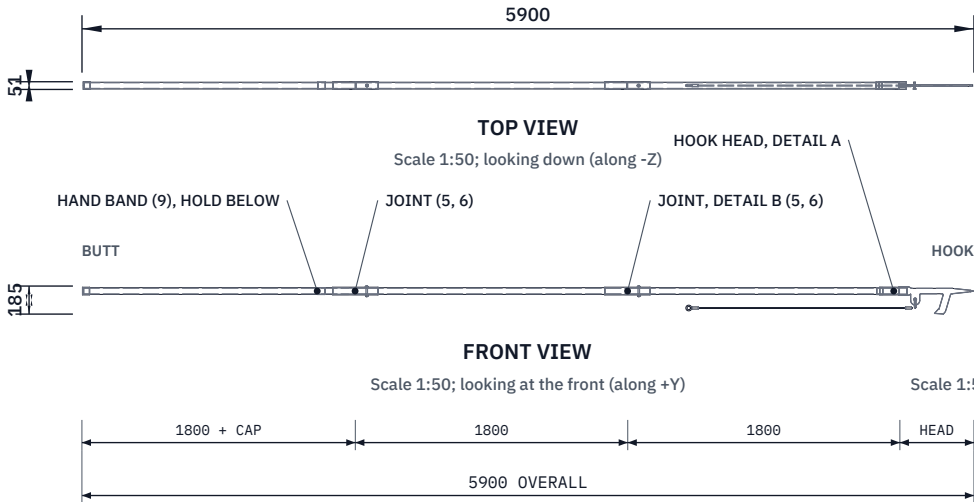

DETAIL C: FORK PROP (BOM 26 TO 31)

Scale 1:10; closed to 1.24 m, foot left, fork right; carried separately, sets the pole at mid-length

MAIN DIMENSIONS AND INTERFACES (MM)

Overall 5900; three sections 1800, 44.5 x 3.2 fibreglass, foam filled
Joints: sleeve 50.8 x 3.2 x 300, bonded 150; nylon pin 10, 75 above joint
Socket 50.8 x 2.0 x 180; pole goes in 130, 1.15 radial clearance
Plate 10 S355 in two 10.5 x 50 slots; four 6 fillet welds outside
Arm reaches 117 below the shank; throat 150 at the shank
Shackle hole 13, in line with the arm; 3/8 in bow shackle, WLL 1 t
Leader 6 wire rope, 1500 eye to eye; pull rope 12 polyester, 25 m
Hand band 1550 from the butt; insulated length 3674
Pole and hook head 7.8 kg; working pull 3 kN, proof 6 kN
Fork prop 1.1 kg, notch 1.19 to 1.94 m; under the pole 2944 from the butt
Third angle; pole along X, hook at +X; (n) = BOM line

BREAKHOOK

github.com/BoujeeEnjinia1701/breakhook

Firebreak hook and pole set: general arrangement

DRAWING NO. BHK-DWG-001			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:50	UNITS mm	PROJECTION 	DATE 2026-10-03		DRAWN Amish Chadha
MATERIAL / NOTES Hook head S355 plate in 50.8 x 2.0 steel tube, primed and painted; pole foam-filled fibreglass tube 44.5 x 3.2; see bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand