


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Wall foot at 400 mm, longer struts (BBX-DEC-001)	2026-10-02	AC

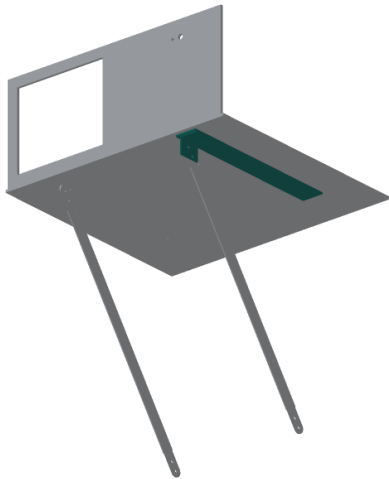

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Rail: 50 x 4 aluminium flat bar, 390 long. Round the corners.


Two 5.5 holes for the housing bolts, 30 and 330 from the wall end, 25 in from the rail's inner edge.

Two 5.5 holes countersunk from the top for the cleat, 348 and 378 from the wall end, 31 in from the inner edge.

Cleat: 40 x 40 x 3 angle, 50 long. Flat leg under the rail, 338 to 388 from the wall end, holes matching the rail. Upright leg on the rail's inner side: two 6.6 holes, 27 and 15.5 from the cleat's wall-side end, 16 and 32.4 down from the rail's underside.

Drill the strut holes with the strut clamped in place (sketch 112).

Fit: the rail bolts under the housing base with two M5 bolts, nuts inside under the floor lining; its wall end is flush with the housing's line on the wall face.

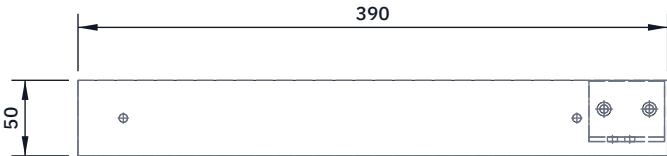

TOP VIEW

Scale 1:5; looking down (along -Z)



FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

BREATHEBOX

github.com/BoujeeEnjinia1701/breathebox

BreatheBox bracket rail with its top cleat (make 2): making sketch

DRAWING NO.

BBX-DWG-111

REV

P2

SHEET

1 of 1

SIZE

ANSI B

SCALE

1:5

UNITS

mm

PROJECTION



DATE

2026-10-02

DRAWN

Amish Chadha

MATERIAL / NOTES

Aluminium flat bar 50 x 4; equal angle 40 x 40 x 3