


Frame antenna to NUCLEO-H723ZG A0 - simplest input

For the e-CzasPL 225 kHz probe firmware (ADC on A0 = PA3, 1 Msps)

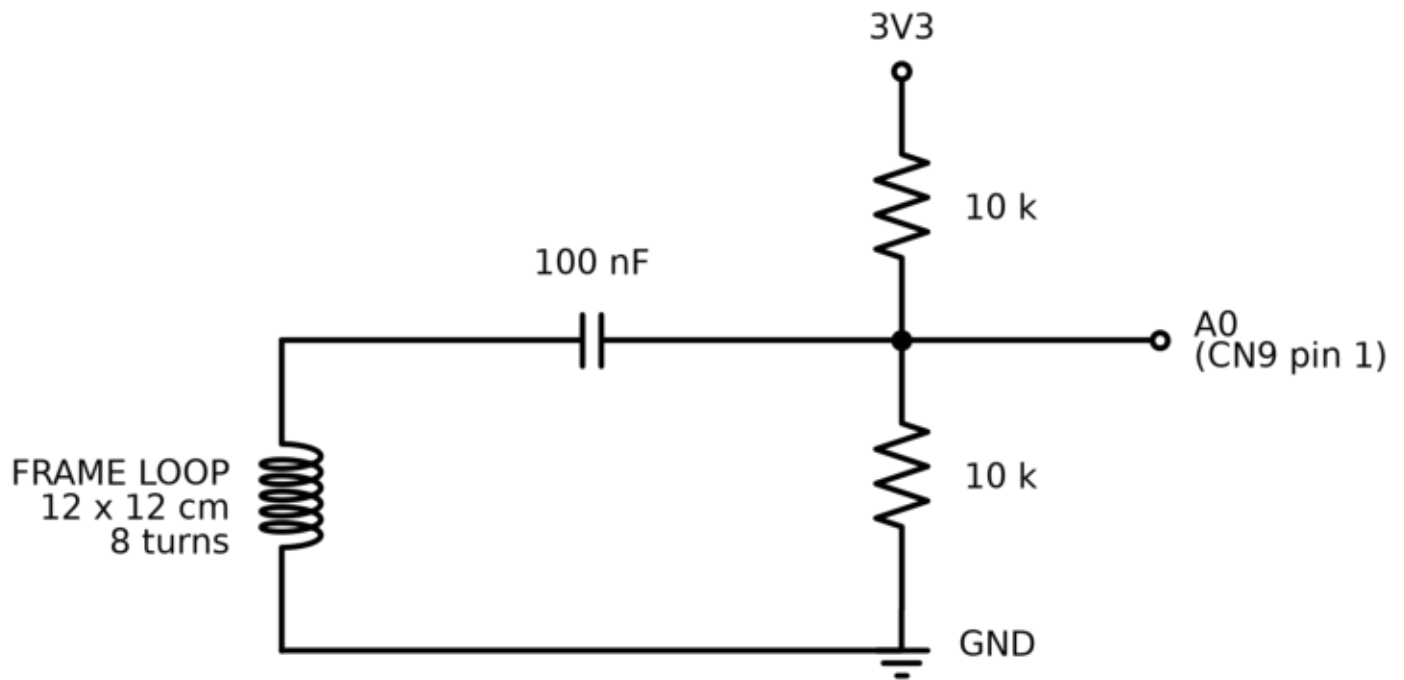

Parts

- 1 x capacitor 100 nF (any ceramic)
- 2 x resistor 10 kOhm

Connections

- Loop end 1 -> 100 nF -> A0 (CN9 pin 1)
- A0 -> 10 k -> 3V3 and A0 -> 10 k -> GND
- Loop end 2 -> GND
- 3V3 and GND: the pins with these labels on CN8, next to CN9.

Why

- The two 10 k resistors hold A0 at 1.65 V, the middle of the ADC range.
- The 100 nF passes the 225 kHz signal but keeps the loop (a short at DC) off that bias.

What the probe should show

- ADC mean about 32768 and no 'min 0'. A received carrier: SNR clearly above 0 dB
- and a steady offset of a few Hz. Turn the loop for the highest SNR.

Later, for about 30x more signal: add 27 nF (C0G) directly across the loop ends.