



CONCEPT, NOT FOR FABRICATION


REV	DESCRIPTION	DATE	BY
P1	Preliminary GA for TRL 3 (BBX-CAL-001)	2026-09-25	AC

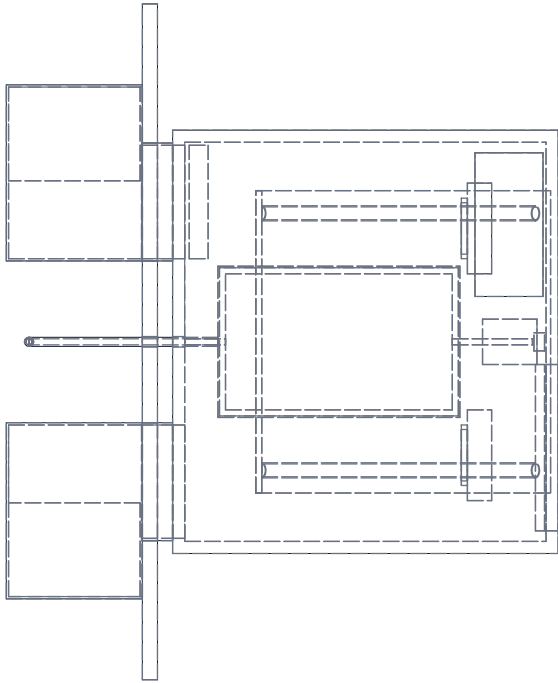


TOP VIEW
Scale 1:10

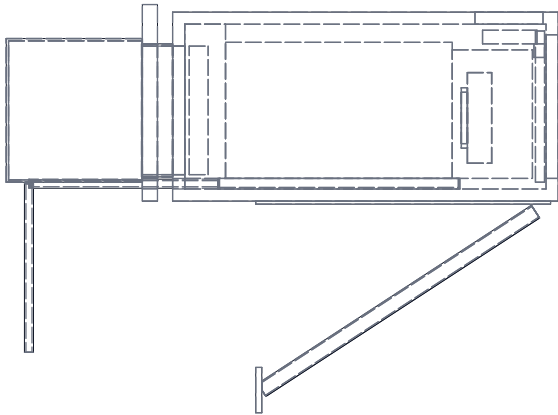

FRONT VIEW
Scale 1:10

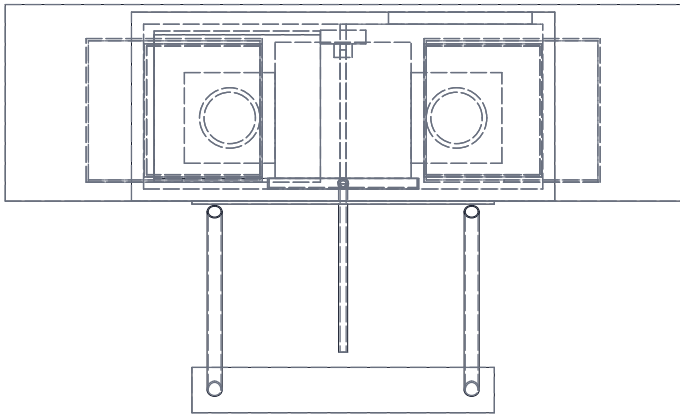

RIGHT VIEW
Scale 1:10

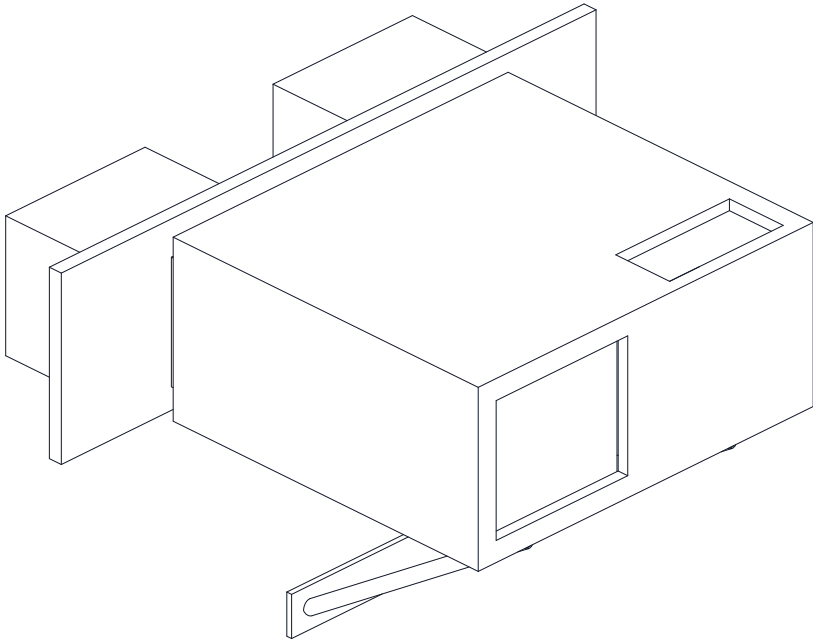

ISOMETRIC VIEW
Not to scale; adapter not shown

KEY DIMENSIONS AND INTERFACES (MM)

Housing 510 x 560 x 250; 110 on sill, 400 into room
Front view: outdoors at left; inner wall face at X = 0
Core 300 x 180 x 180, plate pitch 2.5
Insert panel 20 thick x 260 high, trims to 700 to 1000
Ports 150 x 170 at Y = +/-185
Hood mouths 130 wide, 420 clear; outer edge +/-340
Supply filter ePM1 50 % 150 x 170 x 25; exhaust G3 pad
Fans 120 x 120 x 32 blowers, 24 V PWM with tach
Flow 30 to 70 m3/h per stream, 50 nominal
Tray falls outward; 12 x 8 tube through panel
Sill bracket clamps; no drilling. Mass about 10.5 kg
PRELIMINARY, NOT FOR FABRICATION

BREATHEBOX

General arrangement, window HRV

DRAWING NO. BBX-DWG-001			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:10	UNITS mm	PROJECTION 	DATE 2026-09-25		DRAWN Amish Chadha
MATERIAL / NOTES Housing PVC foam board + foam lining; panel PVC/XPS; hoods PVC; bracket Al. See bom/bom.csv					
Licensed CERN-OHL-S-2.0 · Open Hardware Portfolio · amishchadha.com				Generated from cad/src; do not edit by hand	