


POWER INPUT: 2xAAA, switch, reverse-polarity PMOS

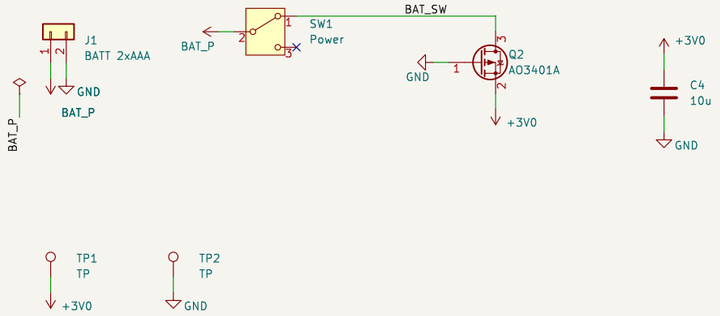


BUZZER, LED, BUTTON

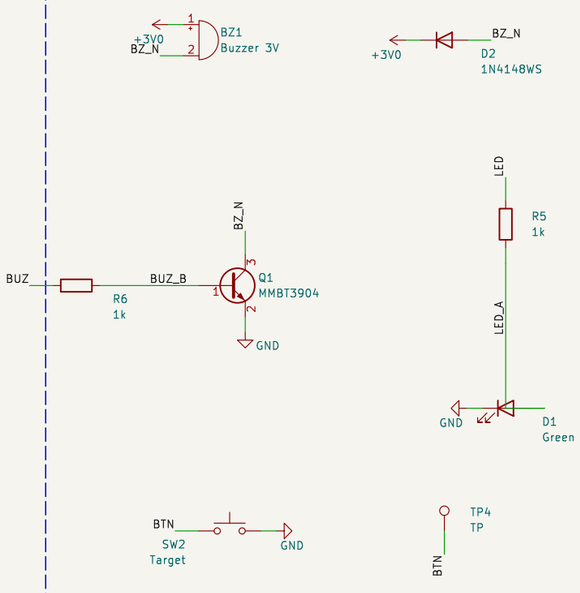

MCU: ATmega328P-AU, internal RC, 4 MHz

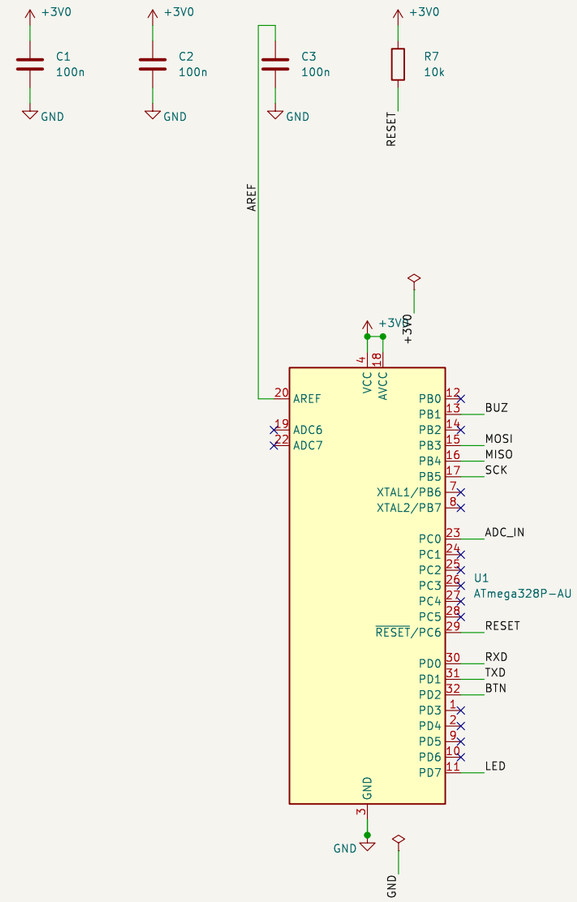

MICROPHONE AMPLIFIER: gain 34, high-pass 0.7 kHz, anti-alias 7 kHz

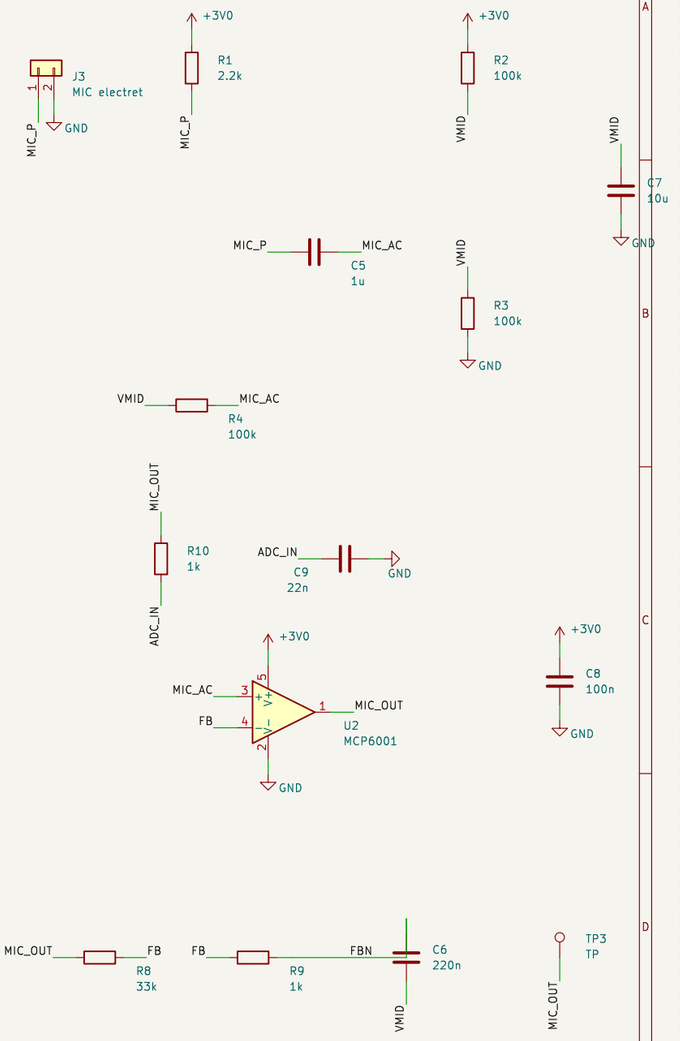

PROGRAMMING / DEBUG



Supply 2.0–3.3 V. ATmega328P: internal 8 MHz RC, firmware divides to 4 MHz (8 MHz needs >= 2.7 V). Fuses lfuse 0xE2, hfuse 0xD9, efuse 0xFE (BOD 1.8 V).

Amp: gain = 1 + R8/R9 = 34 (SPICE: 32.8 at 2.8 kHz), band 0.7–26 kHz (−3 dB) then R10/C9 anti-alias 7.2 kHz, VMID = VCC/2 with 10 uF bypass so the feedback return is low impedance.

Q2 (AO3401A): drain=battery side, source=load, gate=GND: blocks reversed batteries.

First engineering release; see pcb/README.md for status and limits

ClaudeWork

Sheet: /

File: seeti_counter.kicad_sch

Title: Seeti Counter — main board

Size: A3	Date: 2026-11-01	**Rev: B**
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1