


REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC
P2	Pad eye holes replace the lanyard hole (BRP-DEC-001)	2026-10-02	AC



TOP VIEW

Scale 1:5; looking down (along -Z)

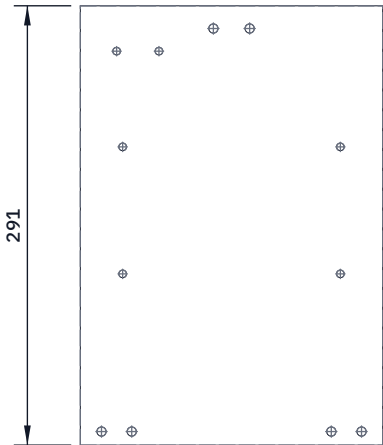


FRONT VIEW

Scale 1:5; looking at the front (along +Y)



RIGHT VIEW

Scale 1:5; looking at the right side (along -X)

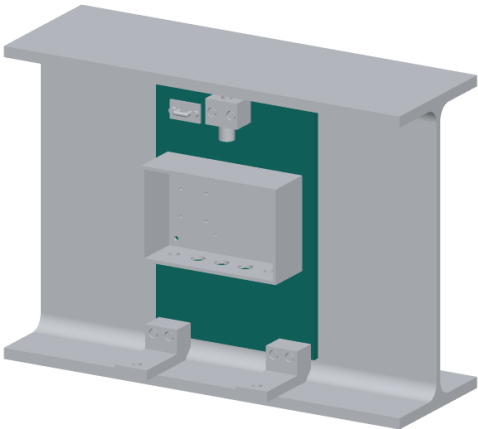

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Blank 200 x 290.6 x 8 mm: the girder's clear web height (334.6 mm on IPE 360) less 22 mm at each end, to clear the root fillets.

Front face: the face the hub sits on. Heights from the bottom edge, sideways from the centre line. All holes go right through.

Hub screws: four M5 tapped (drill 4.2) at 72 each side, 113.3 and 197.3 up.

Foot block screws: four M6 tapped (drill 5.0) at 66 and 86 each side, 9 up.

Jack block screws: two M6 tapped at 12 each side, 275.6 up.

Pad eye screws: two M5 tapped at 48 and 76 left of centre, 260.6 up (left side only).

Deburr; break the edges 0.5 mm; hard anodize (it also insulates).

Check: lay the foot blocks and jack block on it and look through each hole.

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

BridgePulse mounting plate: making sketch

DRAWING NO. BRP-DWG-101			REV P2	SHEET 1 of 1	SIZE ANSI B
SCALE 1:5	UNITS mm	PROJECTION 	DATE 2026-10-02		DRAWN Amish Chadha
MATERIAL / NOTES 6061 aluminium plate 8 mm, hard anodized after machining					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com				Generated from cad/src; do not edit by hand	