



REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

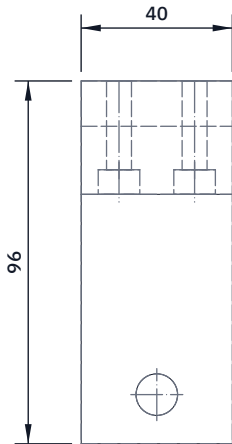


TOP VIEW

Scale 1:2; looking down (along -Z)




FRONT VIEW

Scale 1:2; looking at the front (along +Y)

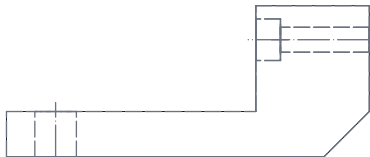

RIGHT VIEW

Scale 1:2; looking at the right side (along -X)

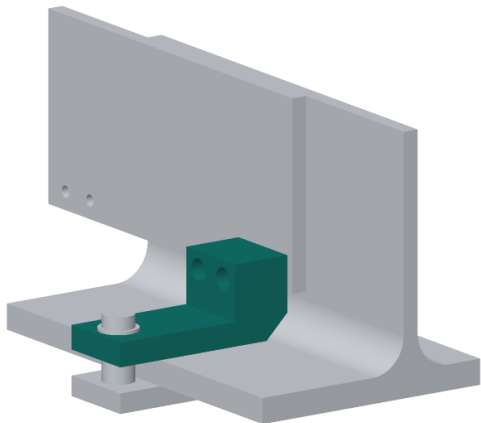

WHERE IT GOES

This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Make two, both the same. Saw a 40 mm slice off 100 x 40 mm bar and square it to 96 long, 40 tall and 40 wide.

Saw out a step 66 long and 28 deep, leaving a tall end 30 long and a tail 12 thick. The tall end's back face goes on the plate.

File a 12 x 12 mm 45 degree chamfer along the bottom of the back face: it keeps the block off the girder's root fillet.

Tall end: two 6.6 mm holes through, 10 each side of centre, 31 up; counterbore 11 mm, 6.5 deep, from the front for M6 cap screws.

Tail: one 11 mm hole, 13 from its end, on the centre line.

Fit: back face flat on the plate front, bottom on the flange top, tail out past the flange tip. Two M6 x 30 screws into the plate.

Check: on a flange offcut it sits flat with no rock at the fillet.

BRIDGEPULSE

github.com/BoujeeEnjinia1701/bridgepulse

BridgePulse foot block (make 2): making sketch

DRAWING NO. BRP-DWG-102			REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 1:2	UNITS mm	PROJECTION 	DATE 2026-09-30		DRAWN Amish Chadha
MATERIAL / NOTES 6061 aluminium flat bar 100 x 40 mm, hard anodized					
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com					Generated from cad/src; do not edit by hand