




REV	DESCRIPTION	DATE	BY
P1	Making sketch for the prototype build plan	2026-09-30	AC

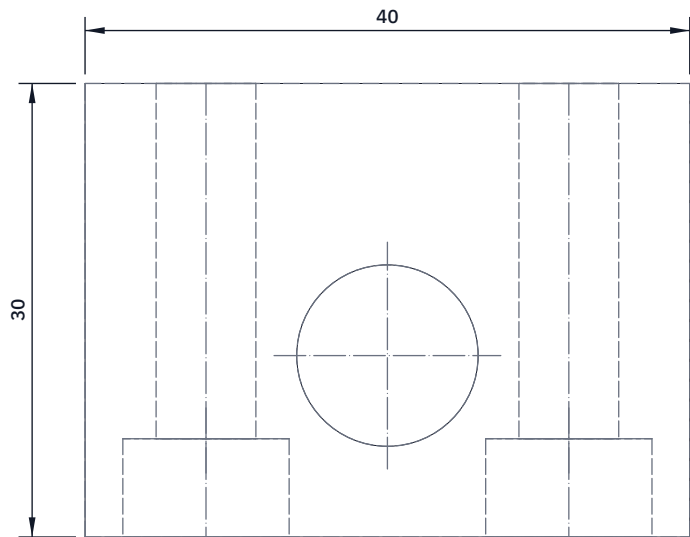


TOP VIEW
Scale 2:1; looking down (along -Z)

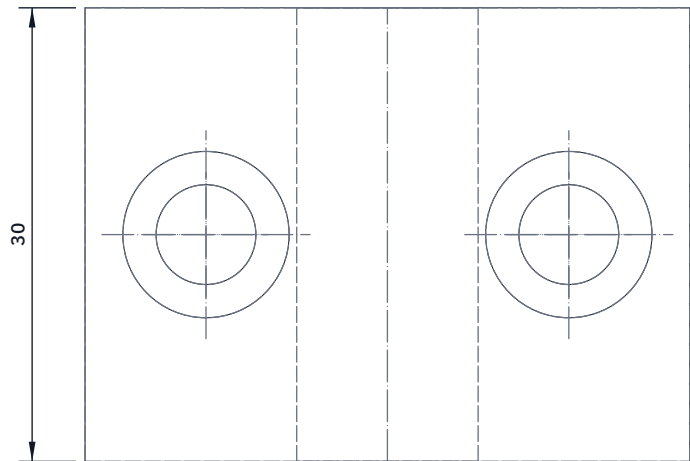

FRONT VIEW
Scale 2:1; looking at the front (along +Y)

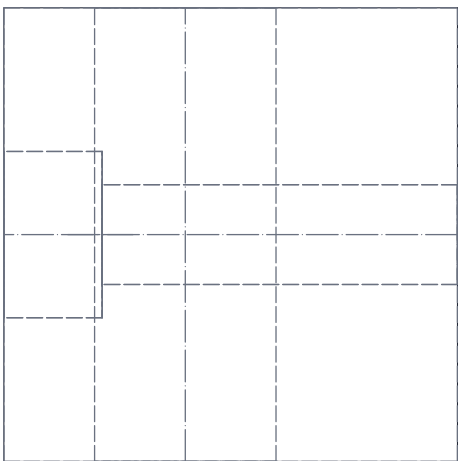

RIGHT VIEW
Scale 2:1; looking at the right side (along -X)

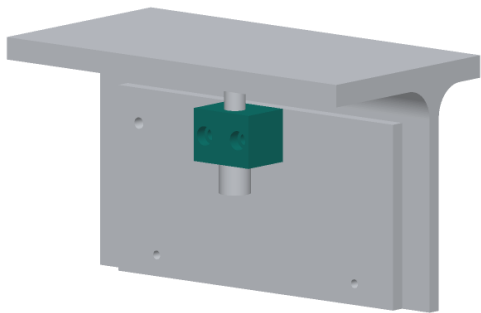

WHERE IT GOES
This part in colour, its neighbours in grey

HOW TO MAKE IT AND HOW IT FITS

Cut 30 mm off 40 x 30 mm bar: a block 40 wide, 30 deep, 30 tall.

The 40 x 30 face that goes on the plate is the back face.

Jack hole: drill 10.2 mm top to bottom, 18 from the back face, on the centre line, square to the top; tap M12 the full 30 mm.

Fixing holes: two 6.6 mm holes front to back, 12 each side of centre, half way up; counterbore 11 mm, 6.5 deep, from the front.

Fit: back face on the plate front, top flush with the plate's top edge; two M6 x 30 cap screws into the plate.

The M12 x 70 jack screw goes up through it, head below, lock nut under the block; its end bears on the top flange 22 mm above.

Check: the jack screw turns freely through the full thread.

BridgePulse jack block: making sketch

DRAWING NO. BRP-DWG-104		REV P1	SHEET 1 of 1	SIZE ANSI B
SCALE 2:1	UNITS mm	PROJECTION 	DATE 2026-09-30	DRAWN Amish Chadha
MATERIAL / NOTES 6061 aluminium flat bar 40 x 30 mm				
Licensed CERN-OHL-S-2.0 · Design Molecule Lab · designmolecule.com			Generated from cad/src; do not edit by hand	